



DVTel CF-4221-00 Fixed IP Camera User & Installation Guide

Instructions for installing and making configurations to the DVTel CF-4221-00 Fixed IP Camera.

Contents

1	Overview	1
1.1	Features.....	1
1.2	Package Contents.....	2
2	Introduction of the CF-4221-00 Fixed IP Camera	2
2.1	CF-4221-00 Camera Dimensions	3
2.2	Camera's Connectors	4
3	System Requirements.....	5
4	Indoor Installation	6
4.1	Power and Ethernet Cable Connection.....	6
4.2	Lens Mounting	7
4.3	Camera Initial Configuration.....	9
4.4	Mounting the DVTel CF-4221-00 Fixed IP Camera	10
4.5	Adjusting and Framing Up the Camera View	12
5	Searching and Accessing Camera – Device Search	14
6	Configuration & Operation.....	19
6.1	Browser-based Viewer Introduction	20
6.2	Home Page	22
6.3	System Related Settings.....	24
6.3.1	Host Name and System Time Setting.....	25
6.3.2	Security.....	27
6.3.2.1	User	28
6.3.2.2	HTTPS	31
6.3.2.3	IP Filter.....	37
6.3.2.4	IEEE 802.1X	38
6.3.3	Network	41
6.3.3.1	Basic	42
6.3.3.2	QoS (Quality of Service)	45
6.3.3.3	SNMP (Simple Network Management Protocol)	47
6.3.3.4	UPnP.....	49
6.3.4	DDNS	51
6.3.5	Mail	52
6.3.6	FTP.....	53
6.3.7	HTTP	53
6.3.8	Application	55
6.3.9	Motion Detection.....	62
6.3.10	Tampering	66
6.3.11	Storage Management.....	68
6.3.12	Recording	72
6.3.13	File Location	73
6.3.14	Iris Adjustment.....	74



6.3.15	View Log File	75
6.3.16	View User Information	76
6.3.17	View Parameters	78
6.3.18	Factory Default	79
6.3.19	Software Version	80
6.3.20	Software Upgrade	81
6.3.21	Maintenance	84
6.4	Video and Audio Streaming Settings	85
6.4.1	Video Resolution and Rotate Type	86
6.4.2	Video Compression	91
6.4.3	Video OCX Protocol	93
6.4.4	Video Frame Rate	94
6.4.5	Audio Mode and Bit Rate Settings	96
6.5	Camera Settings	98
6.5.1	Exposure Setting	99
6.5.2	White Balance Setting	100
6.5.3	Picture Adjustment	101
6.5.4	Digital Zoom	101
6.5.5	IR Function	102
6.5.6	WDR Function	102
6.5.7	Noise Reduction	102
6.5.8	TV System	103
6.6	Logout	103
7	Appendix	104
7.1	Appendix A: Technical Specifications	104
7.2	Appendix B: Internet Security Settings	108
7.3	Appendix C: Install UPnP Components	112
7.4	Appendix D: Deleting the Existing DC Viewer	115
7.5	Appendix E: Deleting Temporary Internet Files	116
7.6	Appendix F: Back Focus Adjustment	118
7.7	Appendix G: Contacting DVTel	120
7.8	Appendix H: Accessories	121

1 Overview

The DVTel CF-4221-00 Fixed IP Camera provides real-time H.264 multi-streaming at the highest image quality.

With its compact, sophisticated mechanical design and snap-in camera chassis, the DVTel CF-4221-00 Fixed IP Camera is easily installed and aesthetic.



Important: If you are using DVTel Latitude, it is recommended that you make configurations to the cameras settings primarily via the AdminCenter rather than via the camera's web based interface of the camera which might be overwritten by Latitude settings. Refer to the Latitude online help for information regarding configuring the settings of the camera.

Related Links

[Features](#)

[Package Contents](#)

1.1 Features


The following are highlighted features of the DVTel CF-4221-00 Fixed IP Camera:

- Progressive Scan CMOS Sensor
- Privacy Masks
- Day/Night (IR Cut Filter)
- ONVIF Support
- (Edge) Motion Detection
- Security IP Restricted Access Allow/Deny List
- HTTP Streaming MPEG
- E-Mail SMTP Alarm Notification (up to 2 emails)
- Detection Event Driven Alarms
- Send images on Alarm to Email
- Sequential snapshot numbering
- Tampering Detection and Notification
- H.264 and MJPEG compression
- WDR & ATW
- Micro SD recording support
- Analog Video output
- Multiple Users
- Built in Web Application/Web Server
- SNMP v1/v2/SNMP Traps
- FTP upload (up to 2 locations)
- Alarm Input Driven Events
- Upload Alarm Images to FTP
- UpNp Support
- Two encoder streams available
- Motion Detection with Region Of Interest Masking
- 3DNR Image Noise Reduction
- Fulltime BNC analog output
- Supports PoE / 12VDC / 24VAC
- RTSP Support
- Group Permissions
- Per User Permissions
- Dual HTTP Notification Server support (up to 2 servers)
- Relay Output Actions on Alarm
- Record Snapshots to SD Card on Alarm
- Historical motion-Detection levels detected and recorded at frame levels.
- Low Lux

1.2 Package Contents

Please check the package contains the following items listed below.

IP Camera Package Contents

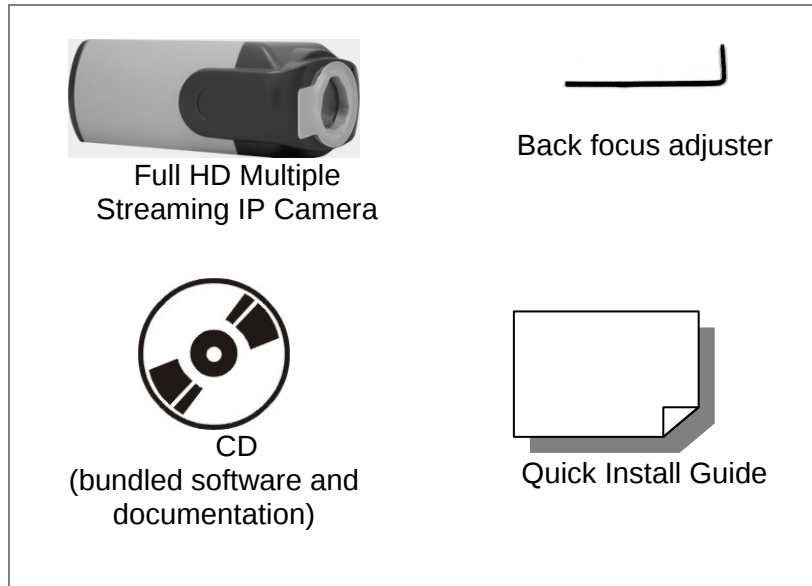

2 Introduction of the CF-4221-00 Fixed IP Camera

This chapter will provide the camera dimensions for reference before installation. Definition of each connector on the camera's PCB board will also be specified.

Related Links

[CF-4221-00 Camera Dimensions](#)


[Camera's Connectors](#)

[Appendix A: Technical Specifications](#)

2.1 CF-4221-00 Camera Dimensions

The DVTel CF-4221-00 Fixed IP Camera's dimensions are shown below.

Dimensions

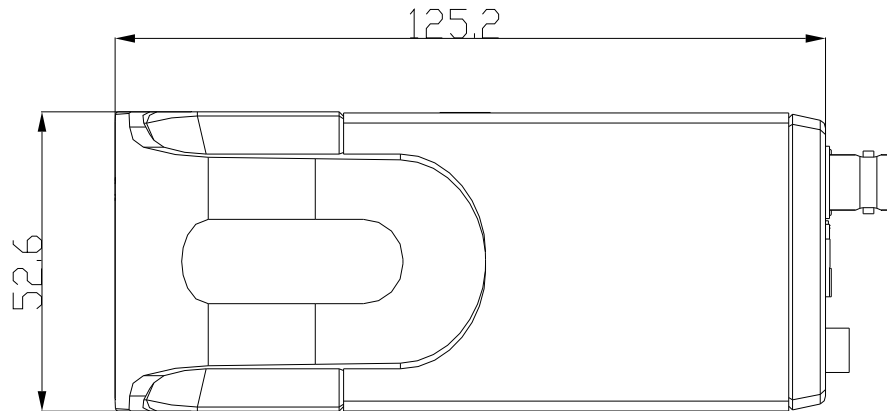


Related Link

[Appendix A: Technical Specifications](#)

2.2 Camera's Connectors

The diagram below shows the CF-4221-00's reset button and various connectors. Definition for each connector will be given as follows.

DC 12V/ AC 24V/ PoE

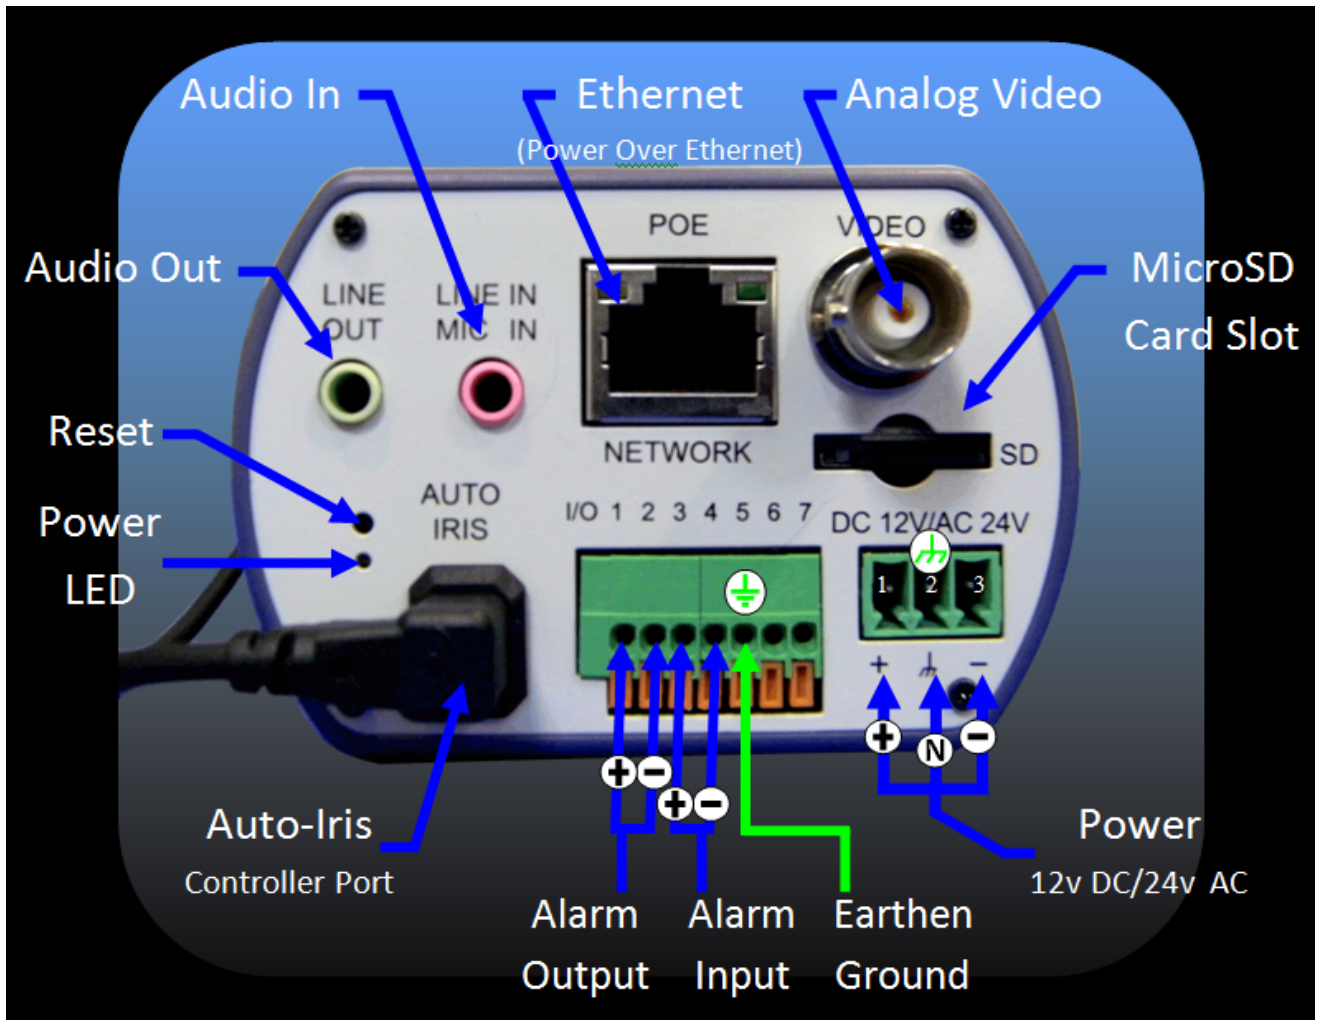

Definition	Remarks
LINE OUT & LINE IN / MIC IN	Two-way audio transmission
Power LED	Power connection indication (green light)
Reset button	Reset to factory default
AUTO IRIS connector	Auto iris lens connector
NETWORK (with PoE)	RJ-45 connector

Definition	Remarks			
Network LEDs	Network connection and activity indication			
I/O	1	Output +	5	GND
	2	Output –	6	D– (Future use)
	3	Input +	7	D+ (Future use)
	4	Input –		
VIDEO (BNC connector)	For video output			
Micro SD Card slot	For video and snapshots storage (card not included)			
AC 24V/DC 12V connector (AC 24V Model)	+	AC 24V: Power-1	DC 12V: Power	
	⏏	AC 24V: Earth GND	DC 12V: Reserved	
	–	AC 24V: Power-2	DC 12V: GND	

3 System Requirements

To access the IP Camera via a web browser, please ensure your PC has the proper network connection, and meets system requirements as described below.

Items	System Requirement
Personal Computer	1. Intel® Pentium® M, 2.16 GHz or Intel® Core™2 Duo, 2.0 GHz 2. 2 GB RAM or more
Operating System	Windows VISTA or Windows XP
Web Browser	Microsoft Internet Explorer 6.0 or later Firefox Chrome Safari
Network Card	10Base-T (10 Mbps) or 100Base-TX (100 Mbps) operation
Viewer	ActiveX control plug-in for Microsoft IE

4 Indoor Installation

Please read the instructions provided in this chapter thoroughly before installing the DVTel CF-4221-00 Fixed IP Camera.

The following are additional consideration for an indoor installation.

- There must be a fuse or breaker at the starting point of the electrical wiring infrastructure.
- For indoor installations, such as industrial applications, the CF-4221-00 must be protected from elements, such as damaging fumes, metallic dust, extreme temperatures, soot, moisture, over spray, etc.
- CF-4221-00 cameras should not be placed near or on radiators and heat sources.
- All electrical work must be performed in accordance with local regulatory requirements.

Related Links

[Power and Ethernet Cable Connection](#)

[Lens Mounting](#)

[Camera Initial Configuration](#)

[Mounting the DVTel CF-4221-00 Fixed IP Camera](#)

[Adjusting and Framing Up the Camera View](#)

4.1 Power and Ethernet Cable Connection

Power Connection

Make sure the camera's power cable is properly connected; refer to the pin definition table in section [Camera's Connectors](#). If using Power over Ethernet (PoE), make sure Power Sourcing Equipment (PSE) is available on the connected network.

All electrical work must be performed in accordance with local regulatory requirements.


Ethernet Cable Connection

Use of Category 5 Ethernet cable is recommended for network connection; to have best transmission quality, cable length shall not exceed 100 meters. Connect one end of the Ethernet cable to the RJ-45 connector of the CF-4221-00 camera, and the other end of the cable to the network switch or PC.



NOTE: You can use an Ethernet crossover cable when connecting the CF-4221-00 directly to the PC.

Check the status of the link indicator and activity indicator LEDs; if the LEDs are unlit, please check LAN connection.



Green Link Light indicates good network connection.

Orange Activity Light flashes for network activity indication.

4.2 Lens Mounting

Before installing your camera, you will want to install the camera lens. Note that the camera lens is sold separately (See [Accessories](#)) and should be selected to match the needs of the scene and to optimize the use of the cameras capabilities.

Auto Iris VS DC lens

Manual iris lens are best limited for use in scenes where illumination never changes, such as a persistently lit store or office. Auto iris is better suited for scenes where the lighting may vary throughout the day and night.



Note: A smaller the focal length number allows a wider field of view. A large number represents a narrower and deeper field of view.

The trade-off is in the amount of detail and depth of view vs. the width of view. For example a 2.8 or 4 mm lens might be sufficient for indoor warehouse and office and an 8mm might be better suited for outdoor perimeters.

After you select your lenses and see the amount of detail provided consider your security surveillance coverage, camera locations and any additional needs that may be discovered. Consult your DVTel rep if you have question.

To mount a lens on the CF-4221-00 camera.

- 1.) Remove the plastic insert covering the threaded camera lens mount.



Tip: Do not touch the sensor or allow dust to accumulate in the lens-mount.

- 2.) If you are using a C-mount lens, screw a 5mm adapter ring to convert C-Mount to CS-Mount.



- 3.) Align the lens threads into the lens mount and screw on the lens.
- 4.) If your lens has a DC auto-iris, plug the auto-iris cable from the motorized lens assembly into the Auto IRIS control port of the camera.



Tip: If you are having problems focusing throughout the zoom range, you may need to do a [Back Focus Adjustment](#).

4.3 Camera Initial Configuration

To Make the Camera Initial Configuration

- 1.) Plug the CAT5 cable into the camera Ethernet port and if the network doesn't provide PoE 802.3af, wire a properly rated AC 24V/DC 12V power supply into the terminal-block plug and plug it into the power terminals. See polarity noted in [HD Series Connections image](#).
- 2.) Do one of the following:
 - Copy and run the DeviceSearch.exe from the included CD.
 - From the Latitude Sidebar, run the Unified Configurator by selecting **Applications ► Device Configuration Tool** and then on the Unified Configurator screen, click **DVTel HD Series**.
- 3.) In the DeviceSearch application, click **Device Search** and do the following:
 - a.) In the search results, click on the camera to select it.
 - b.) Right-click and select from the shortcut menu **Network Setup**.
 - c.) In the dialog that appears, select **Static IP**
 - d.) Enter the **IP Address**, **Gateway** and **Netmask** (network mask) as needed and click **OK**.
- 4.) Disconnect the Ethernet cable and if you are using a power supply, turn off the power to the power supply and unplug it.
The camera is ready for deployment in a site installation (mounting).



Note: The camera can be connected to a PC for bench installation via an Ethernet cross-cable.



Note: The camera default IP Address is 192.168.0.250 and default subnet mask is 255.255.255.0.



Tip: A camera setup adapter, such as *Veracity Pinpoint*, can be used to connect a laptop directly to the camera when using POE.

4.4 Mounting the DVTel CF-4221-00 Fixed IP Camera

To mount a DVTel CF-4221-00 Fixed IP Camera



Warning: The HD Series Indoor Camera must be kept in a clean and dry indoor environment or in a protective camera housing. Operating temperature should be maintained within 0°C ~ 50°C (14° ~ 122°F). Operating humidity 10% to 90% (non-Condensing). The camera should be kept dry, free from water condensation, dust, dirt, and smoke.

1.) Do the following:

► **For Indoor installations (no housing):**

- a.) Install on the ceiling/wall/ flat surface, a *security camera wall mount bracket* stand that is sturdy enough to hold the camera in a fixed position for the field of view required.
- b.) Screw the bracket/stand to the mounting socket on the bottom of the camera.

► **For Indoor/Outdoor installations using a typical protective camera housing:**

For outdoor installation, the camera must be installed in a protective housing such as a DVTel CF-X201-00 camera housing.



CF-X201-00 Camera Housing

- a.) Thread the wires through any of the infrastructure and brackets (e.g. pole bracket/corner bracket/etc.) as needed as well as through the wall bracket arm.
- b.) Bolt the wall bracket (Arm) to the prepared surface.

- c.) Loosen the screws or unlatch the camera housing lid, open the housing and loosen the plastic cable glands (cable fittings)
- d.) Thread the cables through the cable glands into the camera housing.



Cable Gland


- e.) Attach the camera housing to the wall bracket (arm) using the provided screws and wrench.
- f.) Remove the housing plate (base for camera) and using the provided camera mount screw, thread the screw through the plate into the camera's bottom mounting socket.
- g.) Put the camera mounted on the base plate back in the housing.
(We will adjust forward positioning when we adjust the lens.)



Caution: Follow the electrical and safety codes as applicable for where the camera is being installed.

- h.) For housings with internal blowers and heaters: Connect the wiring to the camera housing terminals (power input) according to the manufacturer's instructions for heaters (heater output) and fans (blower output) that the camera housing features. Connect any earthen ground to the camera housing earthen ground connection.

2.) Connect the cables and wiring to the camera:

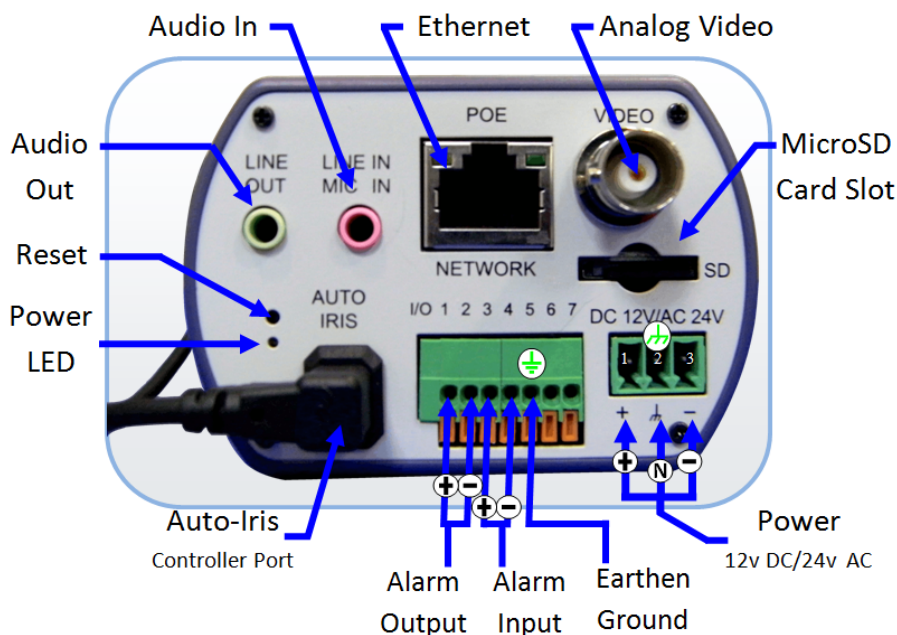

- a.) Plug the CAT5 cable into the camera Ethernet port and if needed wire a properly rate power supply into the power terminal-block plug and insert it into the power terminal block.
- b.) If applicable, wire the Alarm In, Alarm Out, Audio In and Audio Out terminal blocks to external devices.
- c.) If not already connected, connect the other end of the CAT5 cable to the network.

4.5 Adjusting and Framing Up the Camera View

Once you have the camera attached to the network and running, you will want to frame up the scene and adjust the camera settings to optimize the picture for your individual scenes. If you are using Latitude, you may consider scheduling different settings for changing ambient conditions throughout the day, week, month or seasons.

To Adjust and Frame-Up the Camera View

- 1.) In the DeviceSearch application, click **Device Search** and in the results click to select the camera, right-click to open the shortcut menu and select **Browse**.
-OR-
Enter the camera's IP as a URL in a web browser.
- 2.) When the Internet browser connects to the camera and prompts for login, do the following:
 - Log in using the default user name "**Admin**" and password "**1234**".
 - Allow the ActiveX to download and choose to install the DVTel Web Player.



Tip: To view greater image detail for more accurate high-definition focusing, on the Web Base Viewer homepage click  and use the full screen view for checking adjustments.




IMPORTANT: Best focusing results can be achieved when the lens Iris is fully open (such as at night in low light). This prevents loss of sharpness if light levels are reduced at night.

To achieve this during the day, in the *Web Base Viewer* go to the **Camera ► Exposure** screen and select from the **Exposure Setting** menu **Auto-shutter** mode. Save changes and complete the focusing steps. When finished, restore your Exposure settings as needed.

- 3.) Adjust the Pan and Tilt as follows:


For Indoor installations (no housing):

- a.) Loosen the tension screw on the bracket/stand and move (pan and tilt) the camera so that the field of view is optimized for your scene and retighten the tension bolt to hold the camera in place.
- b.) On the camera, adjust the zoom ring and focus ring on the camera lens for your scene. If you have a manual Iris, also adjust the iris ring on your lens.

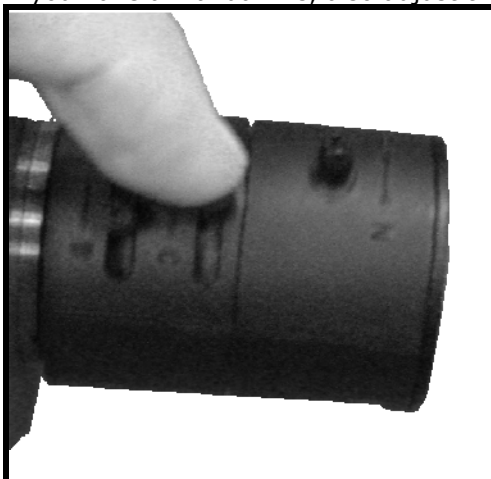


For Indoor/Outdoor installations using a protective camera housing:

- a.) Support the camera housing and loosen the tension bolt on the bracket pan/tilt assembly enough that it allows you to reposition the camera housing.

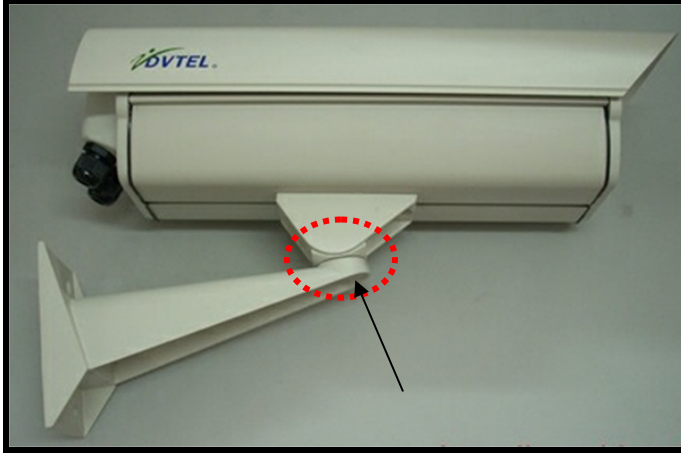

- b.) Move the housing so that the camera field of view is optimized for your scene and retighten the tension bolt on the wall bracket pan/tilt assembly.
- c.) On the camera, adjust the zoom ring and focus ring on the lens for your scene. If you have a manual Iris, also adjust the iris ring on your lens.

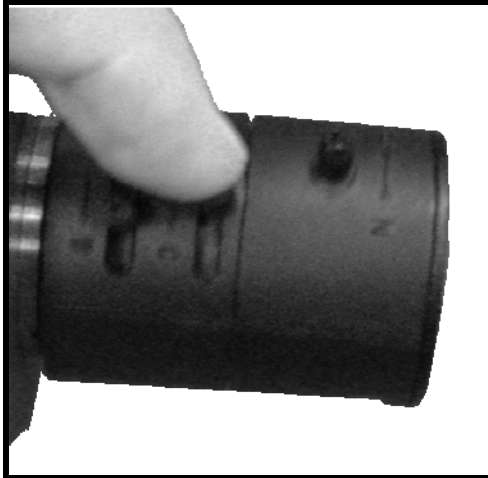

- d.) Adjust the camera and base plate by moving it either forward or backward so that the camera lens close enough to the glass that it reduces the possibility of reflection but does not make contact with the glass.
- e.) Tighten the base plate securely in place and close the camera housing lid.
- f.) Close the latch or tighten the screws firmly so that the lid seal is properly maintained.

5 Searching and Accessing Camera – Device Search

You will need to make the camera accessible for your network addressing.

For initial access to the IP Camera, you can do either of the following to Access the Device Search in order to search and configure the camera's network settings:

- If you have an AdminCenter from DVTel Latitude, you can access the Device Configuration Tool (Unified Configurator) from the Applications menu and then click the DVTel HD Series button.
- You can run the DeviceSearch.exe, which can be found in "DeviceSearch" folder in the supplied CD.

The Device Search provides a central location for listing all the DVTel CM and CF camera models accessible over the network. Once listed you can right click on each and access and change the network settings.

Once the network settings are change you can search again to relist the units and then configure the units via the web interface.

If you are working with DVTel Latitude, you will want to configure the unit with a static IP rather than with DHCP to assure the IP address will not automatically change in the future and interfere with configurations and communication.

Installing DVTel Web Player Software Online

For the initial access to the IP Camera, a client program, DVTel Web Player, will prompt for installing to your PC when connecting to the IP Camera.


If the Web browser doesn't allow DVTel Web Player installation, please check the Internet security settings or ActiveX controls and plug-ins settings (see [Appendix B: Internet Security Settings](#)) to continue the process.



Important: For users who have installed the DVTel Web Player (DC Viewer) in the PC previously, please first delete the existing DC Viewer from the PC before accessing to the IP Camera. For information on how to uninstall and clear Temporary Internet Files, see [Deleting the Existing DC Viewer](#).

To configure the communication settings of the CF-4221-00 camera


- 1.) Connect the CF-4221-00 camera to the network on the same VLAN/LAN as the workstation. (You can use a cross cable to connect it to the machine directly).
- 2.) If your network supports the default Open the DeviceSearch by doing one of the following:
 - a.) If you have an AdminCenter from DVTel Latitude, you can access the Device Configuration Tool (Unified Configurator) from the Applications menu and then click the DVTel HD Series button.
 - b.) Run the DeviceSearch.exe, (From "DeviceSearch" folder in the supplied CD).
- 3.) In the Device Search application, click the "Device Search" button.

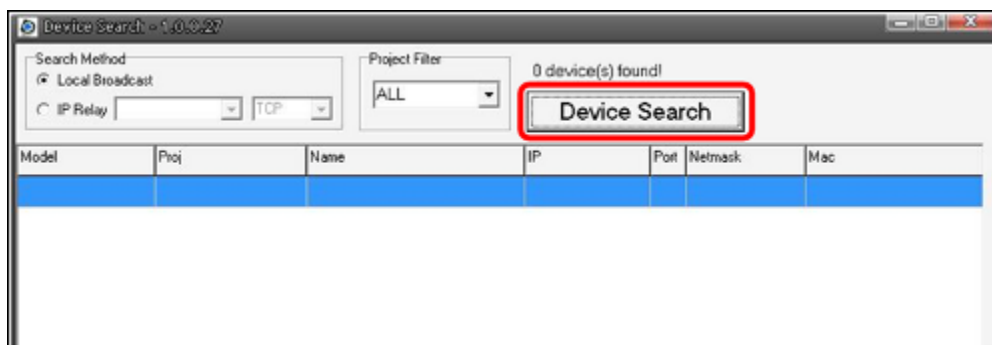

- 4.) If you have not disabled the Windows Firewall, a security alert window will pop up. Do the following:
 - a.) Click "**Unblock**" to continue. (For Latitude users you should consult the Latitude Installation Instructions on disabling the Windows Firewall.)




- b.) Click “**Device Search**” again, and all the finding IP devices will be listed in the page, as shown in the figure below. The IP Camera’s default IP address is: **192.168.0.250**.

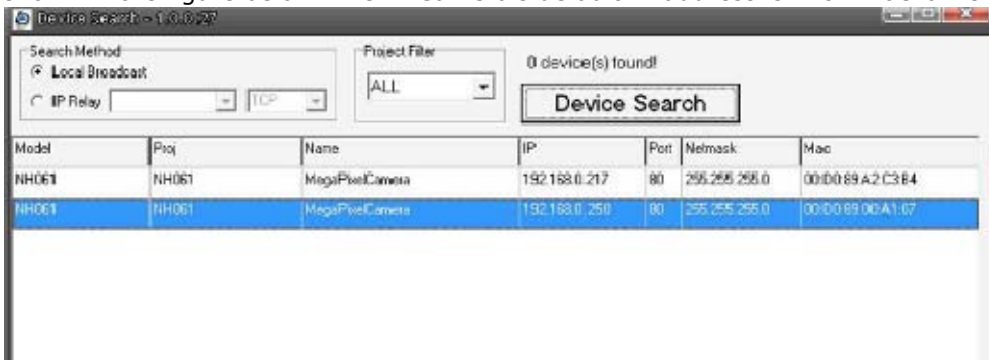

- 5.) Right-click on the IP Camera that you would like to change its network property and from the menu that opens, select “**Network Setup**.”



Tip: record the IP Camera’s MAC address, for future identification.)

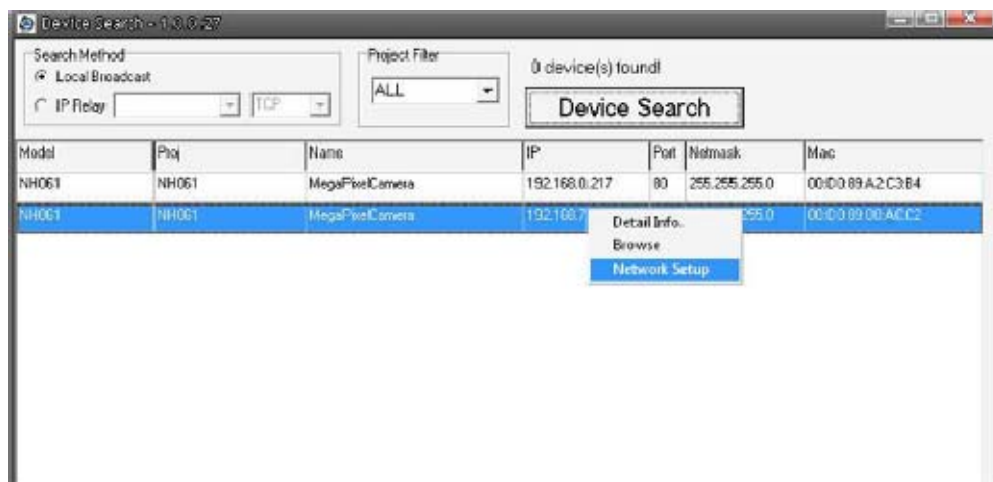

The “Network Setup” dialog displays.

6.) Do the one of the following:


For DHCP (not supported by Latitude)

- Select "**DHCP**" (Do not use for Latitude.)
- Click "**Apply**", when prompted with instructions to search again after one minute, click **OK**.
- After a minute click "**Device Search**".

For Static IP (Recommended for Latitude users)

- Select **Static IP** (preferable for security and Latitude users) and in the IP Address, Gateway, Netmask enter the respective values for your LAN/VLAN. (Optional DNS)
- Click "**Apply**", when prompted with instructions to search again after one minute, click **OK**
- After a minute click "**Device Search**".
The communication settings should now be changed and ready for you to install the CF-4221-00 camera on the network and access it either via the Browser-based Viewer or Latitude NVMS.

7.) Right-click and select "**Browse**" to access the camera directly via web browser.

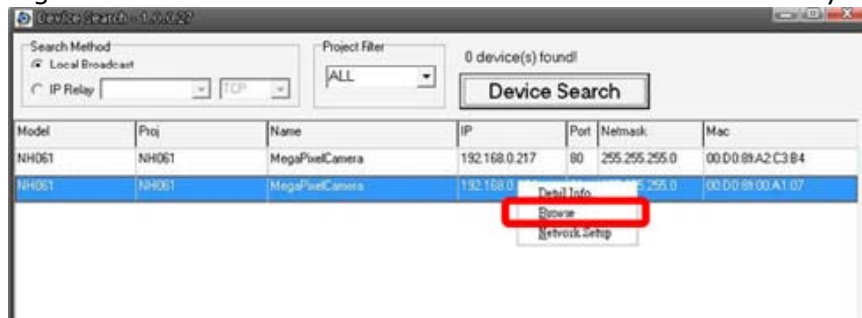

The default web browser opens and requests access to the camera IP.

8.) When the web browser contacts the camera IP do the following:

- When prompted for the login: In the login prompt that appears, enter username and password for the DVTel CF-4221-00 Fixed IP Camera.


The default login ID and password for the Administrator are:

Login ID	Password
Admin	1234



NOTE: ID and password are case sensitive.

- b.) If the Information Bar (just below the URL bar) prompts for permission to install the ActiveX Control for displaying video in browser (see the figure below). Right click on the Information Bar and select "Install ActiveX Control..." to allow the installation.

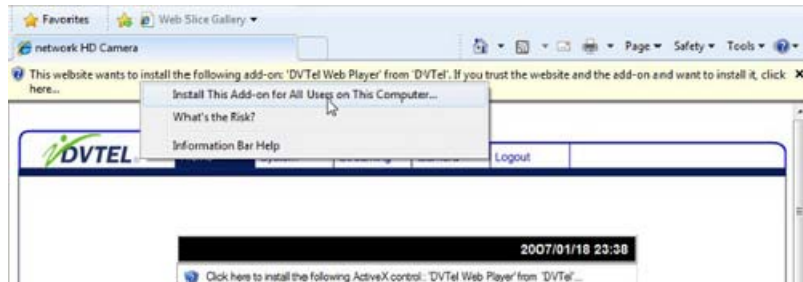

- c.) If a security warning window prompts, click "Install".



- d.) In the wizard for installing a component application DC Viewer appears, follow the steps of the wizard to complete the installation.



NOTE: If you change the password, and you are using the DVTel Latitude AdminCenter Discovery feature, you will need to deselect all other proprietary types and select only DVTel HD Series so that you can configure the new password in the Discovery tab settings.

Additionally, users can change the IP Camera's network property, either DHCP or Static IP directly in the device finding list. Refer to the following section for changing the IP Camera's network property.

6 Configuration & Operation

The IP Camera is provided with a browser-based configuration interface for video playback and recording. In this chapter, information about main page introduction, system related settings and camera settings will be described in detail.


Additionally, if you have DVTel Latitude many of the configurations and features of DVTel's NVMS provide configuration and automation of the DVTel CF-4221-00 Fixed IP Camera.

In this section:

- [Browser-based Viewer Introduction](#)
- [Home Page](#)
- [System Related Settings](#)
- [Video and Audio Streaming Settings](#)
- [Camera Settings](#)
- [Logout](#)

6.1 Browser-based Viewer Introduction

The figure below shows the main page of the IP Camera user interface.

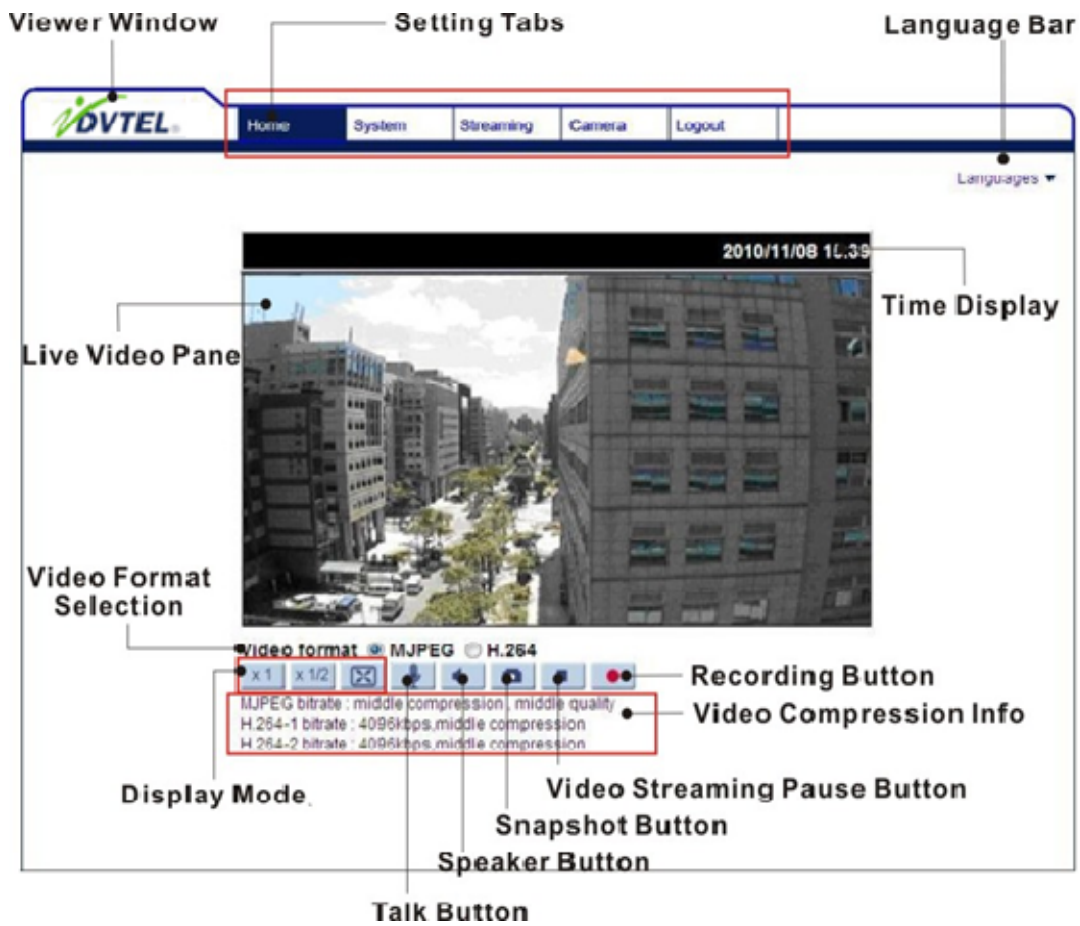

There are five tabs: Home, System, Streaming, Camera and Logout on the top panel.

- **[Home Page](#)**
Users can monitor live video of the targeted area.
- **[System Settings](#)**
The administrator can set host name, system time, root password, network related settings, etc. Further details will be interpreted in section [System Related Settings](#).
- **[Streaming Settings](#)**
The administrator can modify video resolution and rotate type and select audio compression mode in this page.
- **[Camera Settings](#)**
Users can adjust various camera parameters, including <Exposure>, <White Balance>, <Brightness>, <Sharpness>, <Contrast>, <Saturation>, <Hue> and < TV System>.
- **[Logout](#)**
Click on the tab to re-login the IP Camera with another username and password.

6.2 Home Page

In the Home page, there are several function buttons right down the displayed image.



Multiple Languages Support

Multiple languages are supported, including English, Deutsch (German), French, Italian, Simplified Chinese, Russian, or Korean for the viewer window interface.

Screen Size Adjustment

Image display size can be adjusted to x1/2 and full screen.

Digital Zoom Control

In the full screen mode, users can implement digital PTZ by rotating the mouse wheel (for zoom in/out), and drag the mouse into any direction.

Talk button (on/off)

Talk function allows the local site to talk to the remote site. Click on the button to switch it to on/off. Please refer to section 7.3.2 Security: Add user >> Talk/Listen for further details.

This function is only open to "User" who has been granted this privilege by the Administrator.

Speaker button (on/off)

Press the Speaker button to mute/activate the audio.

Snapshot button

Press the button, and the JPEG snapshots will automatically be saved in the specified place. The default place of saving snapshots is: C:\. To change the storage location, please refer to section [File Location](#) for further details.

Video Streaming Pause / Restart button (pause/restart)

Press the stop button to disable video streaming, the live video will be displayed as black. Press the restart button to show the live video again.

Web Recording button (on/off)


Press the <Recording> button and the recordings from the Live View will be directly to the specific location on the local hard drive, which could be configured in the "File Location" (snapshot) page. The default storage location for the web recording is: C:/. Please refer to section [File Location](#) for further details.

6.3 System Related Settings

The figure below shows all categories under the “System” tab. Each category in the left column will be explained in the following sections.



NOTE: The “System” configuration page is only accessible by Administrator.

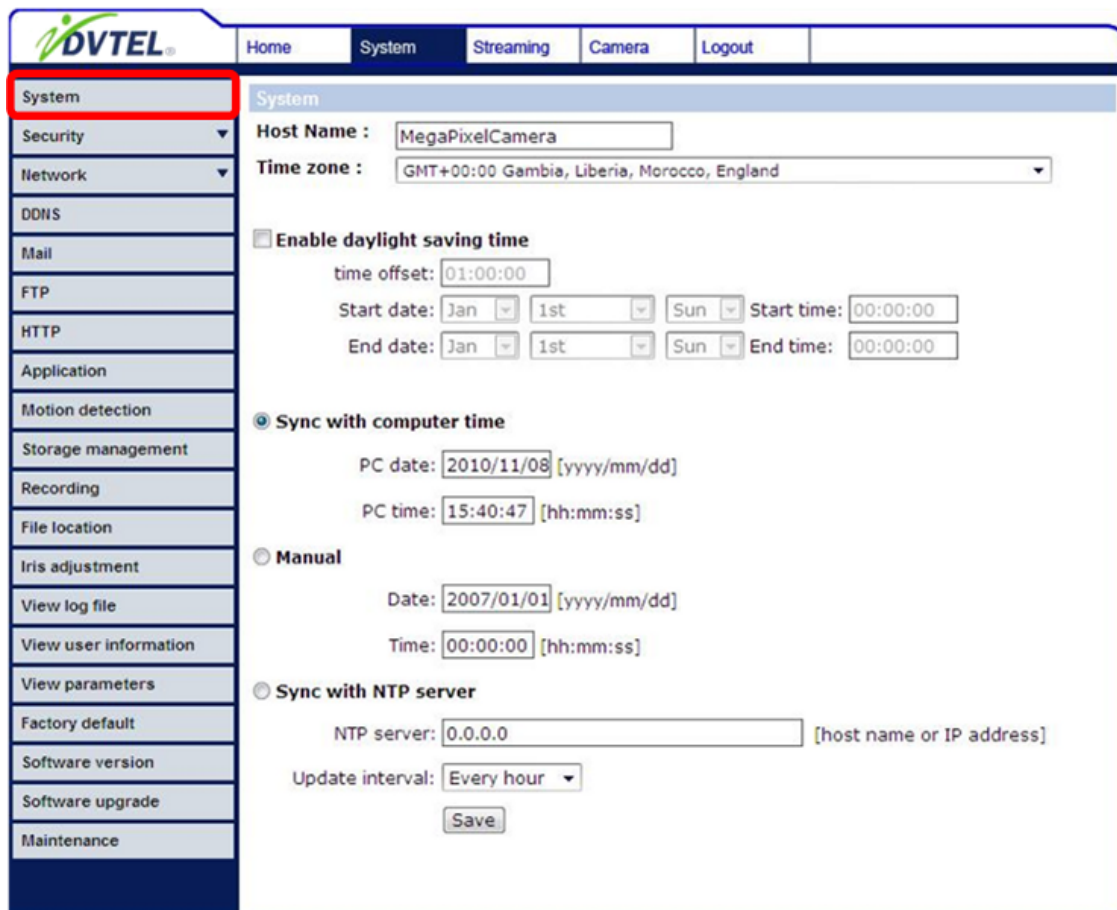


Related Links

- [Host Name and System Time Setting](#)
- [Security](#)
- [Network](#)
- [DDNS](#)
- [Mail](#)
- [FTP](#)
- [HTTP](#)
- [Application](#)
- [Motion Detection](#)
- [Tampering](#)
- [Storage Management](#)
- [Recording](#)
- [File Location](#)
- [Iris Adjustment](#)
- [View Log File](#)
- [View User Information](#)
- [View Parameters](#)
- [Factory Default](#)
- [Software Version](#)
- [Software Upgrade](#)
- [Maintenance](#)

6.3.1 Host Name and System Time Setting

Press the first category: <System> in the left column; the page is shown as below.

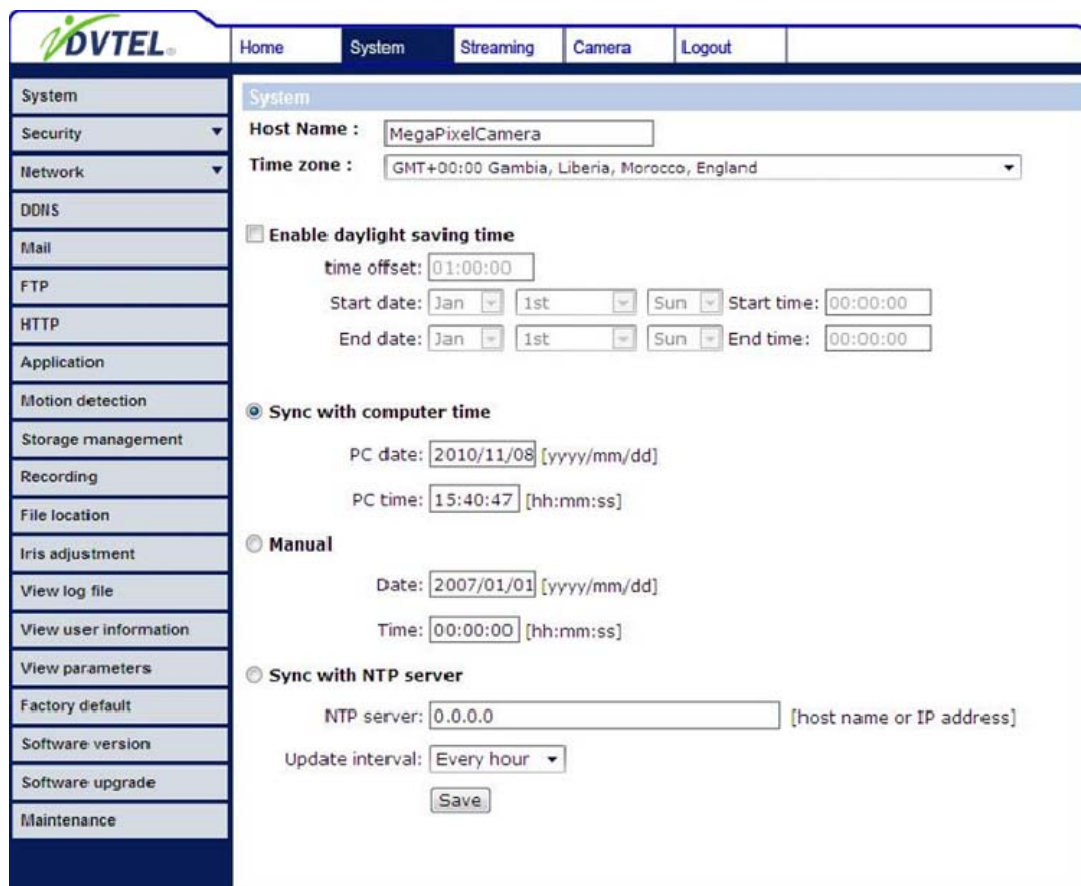

The screenshot shows the DVTel web interface. The left sidebar has a menu with the following items: System, Security, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'System' and contains the following fields and options:

- Host Name :** MegaPixelCamera
- Time zone :** GMT+00:00 Gambia, Liberia, Morocco, England
- ☐ **Enable daylight saving time**
 - time offset: 01:00:00
 - Start date: Jan 1st Sun Start time: 00:00:00
 - End date: Jan 1st Sun End time: 00:00:00
- ☒ **Sync with computer time**
 - PC date: 2010/11/08 [yyyy/mm/dd]
 - PC time: 15:40:47 [hh:mm:ss]
- ☐ **Manual**
 - Date: 2007/01/01 [yyyy/mm/dd]
 - Time: 00:00:00 [hh:mm:ss]
- ☐ **Sync with NTP server**
 - NTP server: 0.0.0.0 [host name or IP address]
 - Update interval: Every hour
- Save**

Host Name

The name is for camera identification. If alarm function (see section [Application](#)) is enabled and is set to send alarm message by Mail/FTP, the host name entered here will display in the alarm message.

Time Zone

Select the time zone you are in from the drop-down menu.

Enable Daylight Saving Time

To enable DST, please check the item and then specify time offset and DST duration. The format for time offset is [hh:mm:ss]; for instance, if the amount of time offset is one hour, please enter "01:00:00" into the field.

Sync With Computer Time

Select the item, and video date and time display will synchronize with the PC's.

Manual


The Administrator can set video date, time and day manually. Entry format should be identical with that shown next to the enter field.

Sync with NTP Server

Network Time Protocol (NTP) is an alternate way to synchronize your camera's clock with a NTP server. Please specify the server you wish to synchronize in the enter field. Then select an update interval from the drop-down menu. For further information about NTP, please see the web site: www.ntp.org.

6.3.2 Security

Click the category: <Security>, there will be a drop-down menu with tabs including <User>, <HTTPS>, <IP Filter>, and <IEEE 802.1X>.

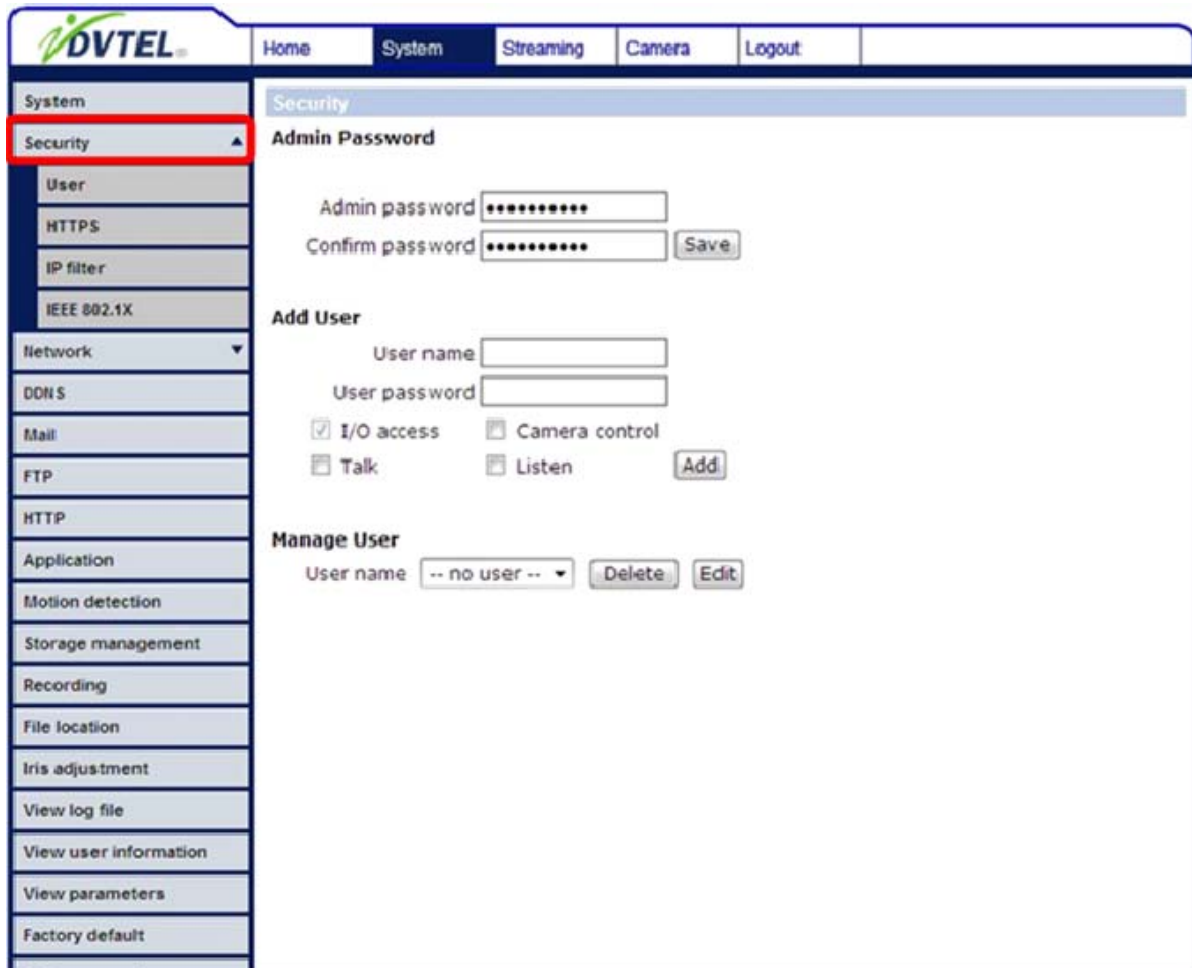

The screenshot displays the iDVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a list of system settings, with 'Security' highlighted by a red rectangle. The 'Security' section is expanded, showing sub-options: User, HTTPS, IP filter, and IEEE 802.1X. The main content area is titled 'Security' and contains three sections:

- Admin Password:** Fields for 'Admin password' and 'Confirm password' (both masked with dots), followed by a 'Save' button.
- Add User:** Fields for 'User name' and 'User password', followed by checkboxes for 'I/O access' (checked), 'Camera control', 'Talk', and 'Listen', and an 'Add' button.
- Manage User:** A 'User name' dropdown menu currently showing '-- no user --', followed by 'Delete' and 'Edit' buttons.

Related Links

[User](#)


[HTTPS](#)

[IP Filter](#)

[IEEE 802.1X](#)

6.3.2.1 User

Click the <User> tab under the category <Security> and the page is shown as the figure below.

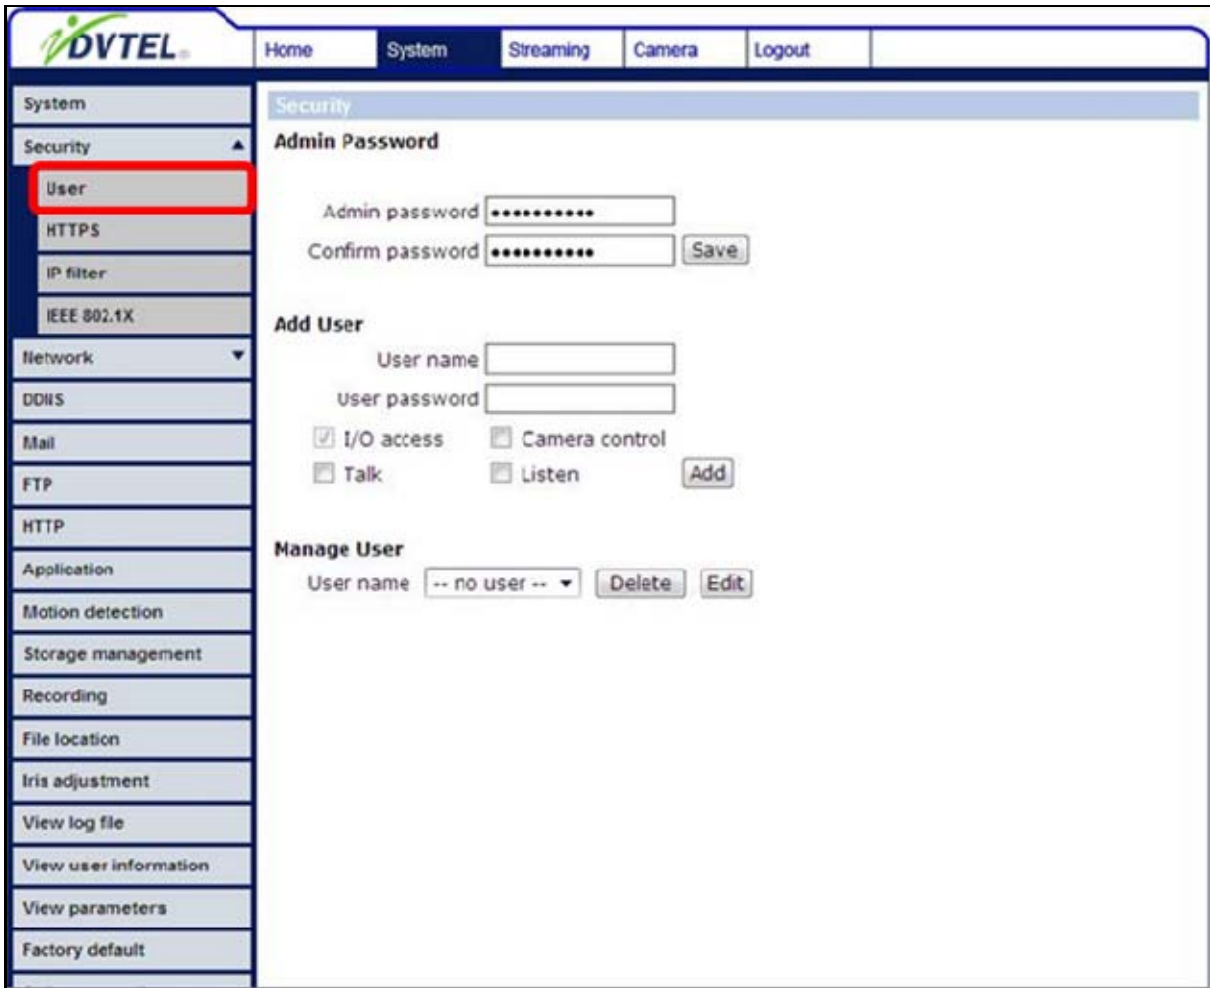

The screenshot shows the DVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a tree view with categories: System, Security, and Network. Under the Security category, the 'User' option is highlighted with a red box. Other options in the Security category include HTTPS, IP filter, and IEEE 802.1X. The main content area is titled 'Security' and contains three sections: 'Admin Password', 'Add User', and 'Manage User'. The 'Admin Password' section has two text boxes for 'Admin password' and 'Confirm password', both filled with dots, and a 'Save' button. The 'Add User' section has text boxes for 'User name' and 'User password', and checkboxes for 'I/O access', 'Talk', 'Camera control', and 'Listen', with an 'Add' button. The 'Manage User' section has a dropdown menu for 'User name' showing '-- no user --', and 'Delete' and 'Edit' buttons.

Root password

Change the administrator's password by inputting the new password in both text boxes. The input characters/numbers will be displayed as dots for security purposes. After clicking <Save>, the web browser will ask the Administrator for the new password for access. The maximum length of the password is 14 digits.



NOTE: The following characters are valid: A-Z, a-z, 0-9, !#\$%&'-.@^_~.

Add user

Type the new user's name and password and click <Add> to add the new user. Both user name and password can be up to 16 characters. The new user will be displayed in the user name list. There is a maximum of twenty user accounts. Each user can be assigned the privileges of **“Camera control”**, **“Talk”** and **“Listen”**.

I/O access

This item supports fundamental functions that enable users to view video when accessing to the camera.

Camera control

This item allows the specified User to change camera parameters on the Camera Setting page.

Talk/Listen

Talk and Listen functions allow the appointed user in the local site (PC site) communicating with, for instance, the administrator in the remote site.

Manage User**Delete user**


To delete a user, pull down the user list, and select the user name you wish to delete. Then click <Delete> to remove it.

Edit user

Pull down the user list and select a user name. Click <Edit> to edit the user's password and privilege.



NOTE: It is required to enter the User password as well as select the function open to the user. When finished, click <Save> to modify the account authority.

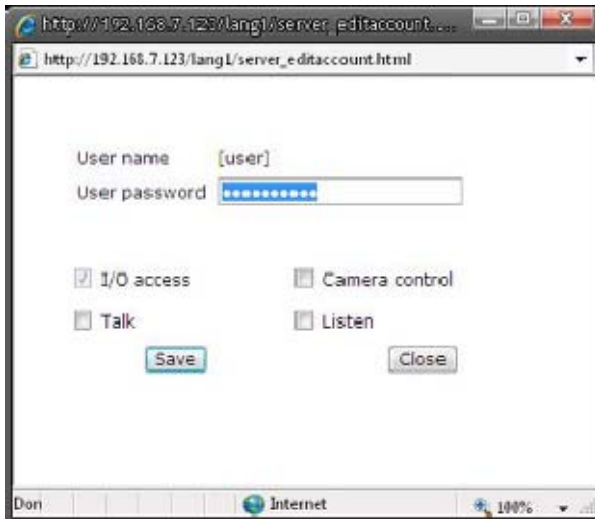

http://192.168.7.123/lang1/server_editaccount.html

User name [user]
User password [password]

☒ I/O access ☐ Camera control
☐ Talk ☐ Listen

Don't Internet 100%



http://192.168.7.123/lang1/server_editaccount.html

User name [user]
User password [password]


☒ I/O access ☒ Camera control
☐ Talk ☒ Listen

Don't Internet 100%

6.3.2.2 HTTPS

<HTTPS> allows secure connections between the IP Camera and web browser using <Secure Socket Layer (SSL)> or <Transport Layer Security (TLS)>, which ensure camera settings or Username/ Password info from snooping. It is required to install a self-signed certificate or a CA-signed certificate for implementing <HTTPS>.

Click the <HTTPS> tab, and the HTTPS setting page is shown as the figure below.

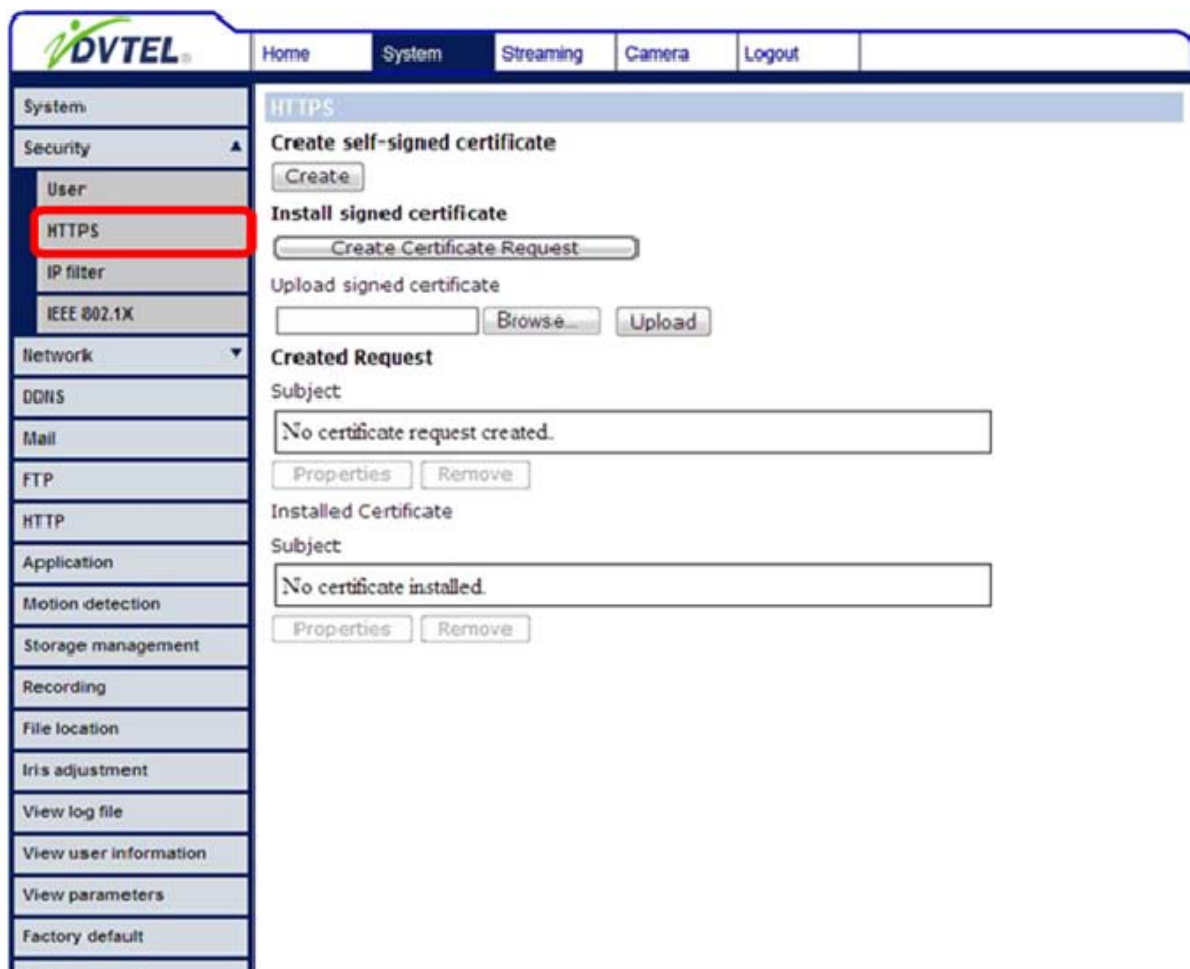


The screenshot shows the DVTel web interface. The left sidebar contains a menu with the following items: System, Security, User, **HTTPS** (highlighted with a red box), IP filter, IEEE 802.1X, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, and Factory default. The main content area is titled 'HTTPS' and contains the following sections:

- Create self-signed certificate**: A 'Create' button.
- Install signed certificate**: A 'Create Certificate Request' button.
- Upload signed certificate**: A text input field, a 'Browse...' button, and an 'Upload' button.
- Created Request**: A 'Subject' field with the text 'No certificate request created.' and 'Properties' and 'Remove' buttons.
- Installed Certificate**: A 'Subject' field with the text 'No certificate installed.' and 'Properties' and 'Remove' buttons.

To use HTTPS on the IP Camera, a HTTPS certificate must be installed. The HTTPS certificate can be obtained by either creating and sending a certificate request to a Certificate Authority (CA) or creating a self-signed HTTPS certificate, as described below.

Create Self-signed Certificate

Before a CA-issued certificate is obtained, users can create and install a self-signed certificate first.

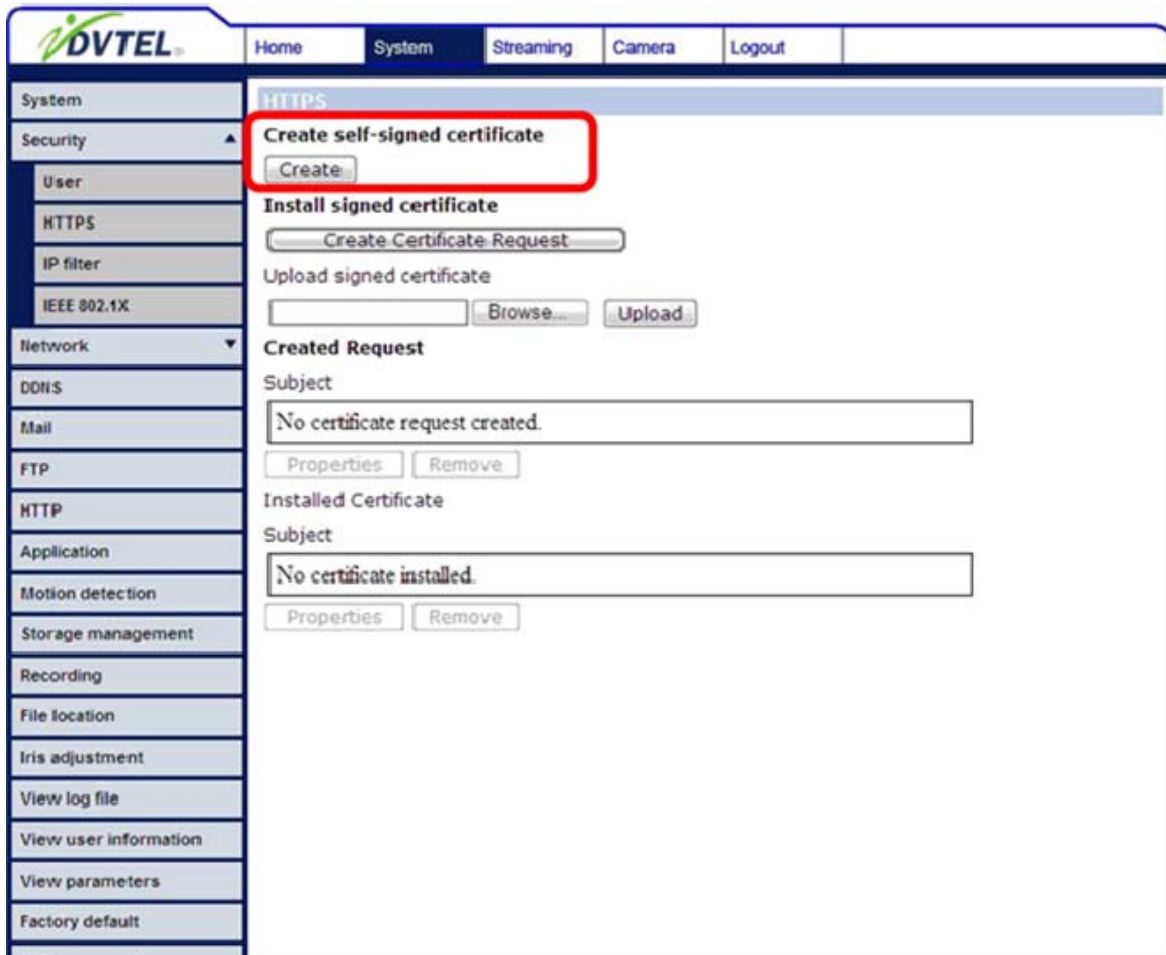

The screenshot shows the DVTel web interface with the 'System' tab selected. The left sidebar lists various system settings, including 'System', 'Security', 'User', 'HTTPS', 'IP filter', 'IEEE 802.1X', 'Network', 'DDNS', 'Mail', 'FTP', 'HTTP', 'Application', 'Motion detection', 'Storage management', 'Recording', 'File location', 'Iris adjustment', 'View log file', 'View user information', 'View parameters', and 'Factory default'. The main content area is titled 'HTTPS' and contains the following sections:

- Create self-signed certificate**: A red box highlights the 'Create' button.
- Install signed certificate**: Includes a 'Create Certificate Request' button.
- Upload signed certificate**: Includes a text input field, a 'Browse...' button, and an 'Upload' button.
- Created Request**: Includes a 'Subject' label and a text input field containing 'No certificate request created.' Below the input field are 'Properties' and 'Remove' buttons.
- Installed Certificate**: Includes a 'Subject' label and a text input field containing 'No certificate installed.' Below the input field are 'Properties' and 'Remove' buttons.


Click <Create> button under "Create self-signed certificate" and provide the requested information to install a self-signed certificate for the IP Camera. Please refer to the last part of this section: [Provide the Certificate Information](#) for more details.



NOTE: The self-signed certificate does not provide the same high level of security as when using a CA-issued certificate.

Create Certificate Request

Click the **"Create Certificate Request"** button to create and submit a certificate request in order to obtain a signed certificate from CA.

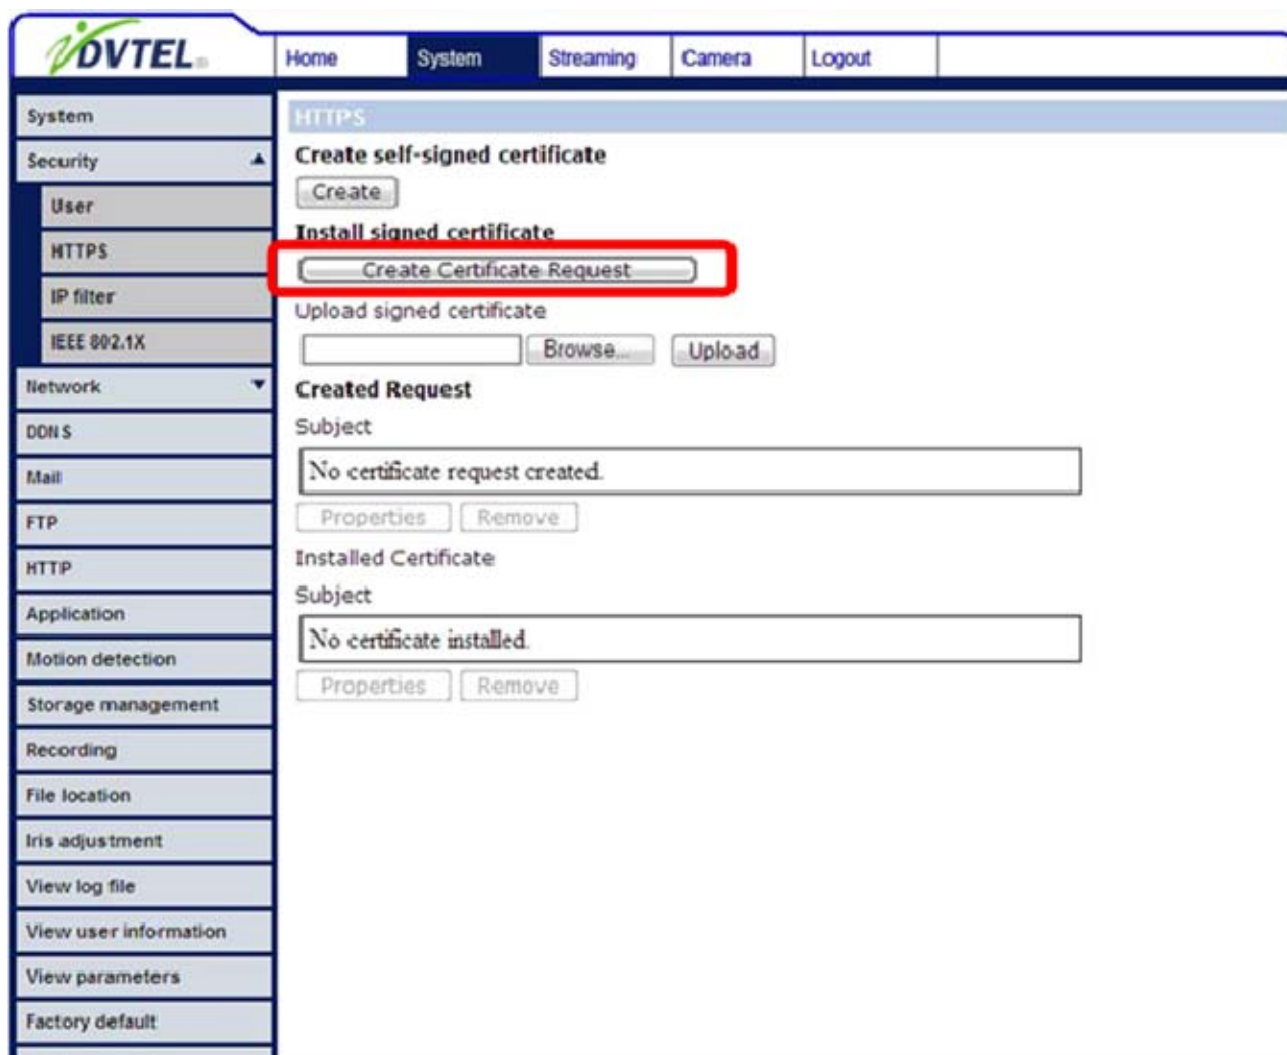


The screenshot shows the DVTel web interface with the following elements:

- Navigation Bar:** Home, System, Streaming, Camera, Logout.
- Left Sidebar:** System, Security (expanded), User, HTTPS, IP filter, IEEE 802.1X, Network, DNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default.
- Main Content Area:**
 - HTTPS Section:**
 - Create self-signed certificate:** Create button.
 - Install signed certificate:** **Create Certificate Request** button (highlighted with a red rectangle).
 - Upload signed certificate:** Text input, Browse... button, Upload button.
 - Created Request:**
 - Subject: No certificate request created.
 - Buttons: Properties, Remove.
 - Installed Certificate:**
 - Subject: No certificate installed.
 - Buttons: Properties, Remove.

Provide the request information in the create dialog. Please refer to the following [Provide the Certificate Information](#) for more details.

When the request is complete, the subject of the Created Request will be shown in the field. Click **"Properties"** below the Subject field, copy the PEM-formatted request and send it to your selected CA.


When the signed certificate is returned, install it by uploading the signed certificate.

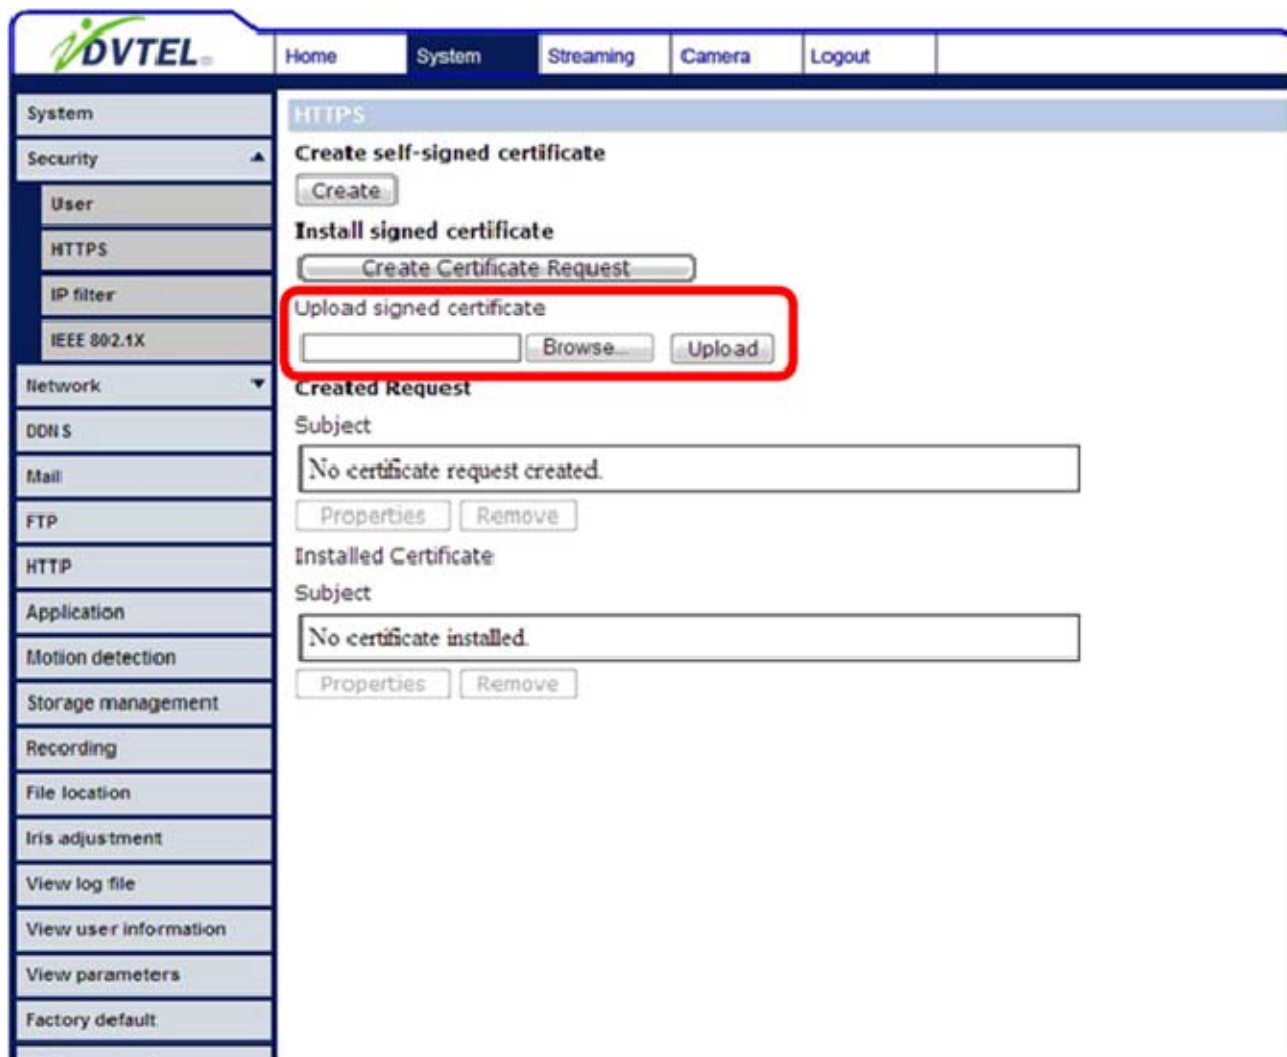

The screenshot displays the iDVTel web interface for the CF-4221-00 Fixed IP Camera. The interface includes a top navigation bar with links for Home, System, Streaming, Camera, and Logout. A left sidebar contains a menu with categories like System, Security, Network, and Mail, with sub-items such as User, HTTPS, IP filter, and IEEE 802.1X. The main content area is titled 'HTTPS' and contains three sections: 'Create self-signed certificate' with a 'Create' button; 'Install signed certificate' with a 'Create Certificate Request' button; and 'Upload signed certificate', which is highlighted with a red box and includes a text input field, a 'Browse...' button, and an 'Upload' button. Below these sections are two status areas: 'Created Request' showing 'No certificate request created.' with 'Properties' and 'Remove' buttons, and 'Installed Certificate' showing 'No certificate installed.' with 'Properties' and 'Remove' buttons.

Provide the Certificate Information

To create a Self-signed HTTPS Certificate or a Certificate Request to CA, please enter the information as requested:

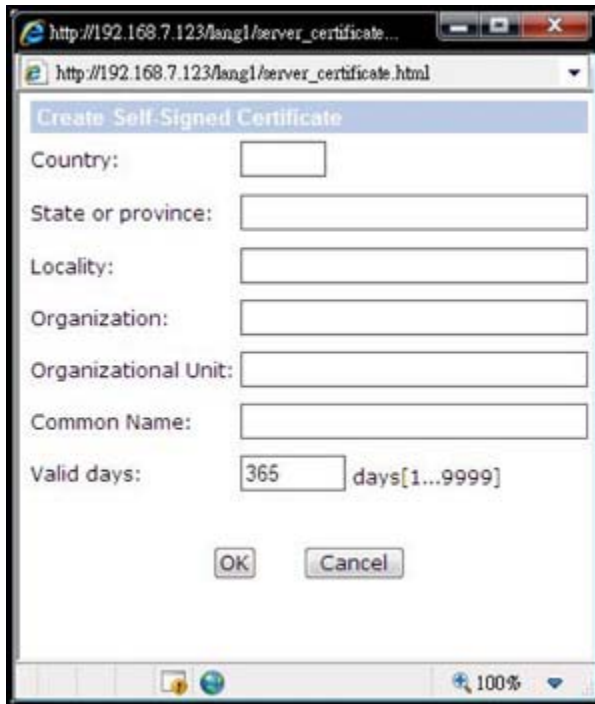

The screenshot shows a web browser window with the address bar displaying `http://192.168.7.123/lang1/server_certificate.html`. The page title is "Create Self-Signed Certificate". The form contains the following fields:

- Country:
- State or province:
- Locality:
- Organization:
- Organizational Unit:
- Common Name:
- Valid days: days[1...9999]

At the bottom of the form are two buttons: "OK" and "Cancel".



The screenshot shows a web browser window with the address bar displaying `http://192.168.7.123/lang1/server_createrequest.html`. The page title is "Create Certificate Request". The form contains the following fields:

- Country:
- State or province:
- Locality:
- Organization:
- Organizational Unit:
- Common Name:

At the bottom of the form are two buttons: "OK" and "Cancel".

Country

Enter a 2-letter combination code to indicate the country the certificate will be used in. For instance, type in "US" to indicate United States.

State or province

Enter the local administrative region.

Locality

Enter other geographical information.

Organization

Enter the name of the organization to which the entity identified in "Common Name" belongs.

Organization Unit

Enter the name of the organizational unit to which the entity identified in "Common Name" belongs.

Common Name

Indicate the name of the person or other entity that the certificate identifies (often used to identify the website).


Valid days (Self-signed Certificate Only)

Enter the period in days (1~9999) to indicate the valid period of certificate.

Click "OK" to save the Certificate Information after complete.

6.3.2.3 IP Filter

Using the IP filter, access to the IP Camera can be restricted by denying/allowing specific IP addresses.

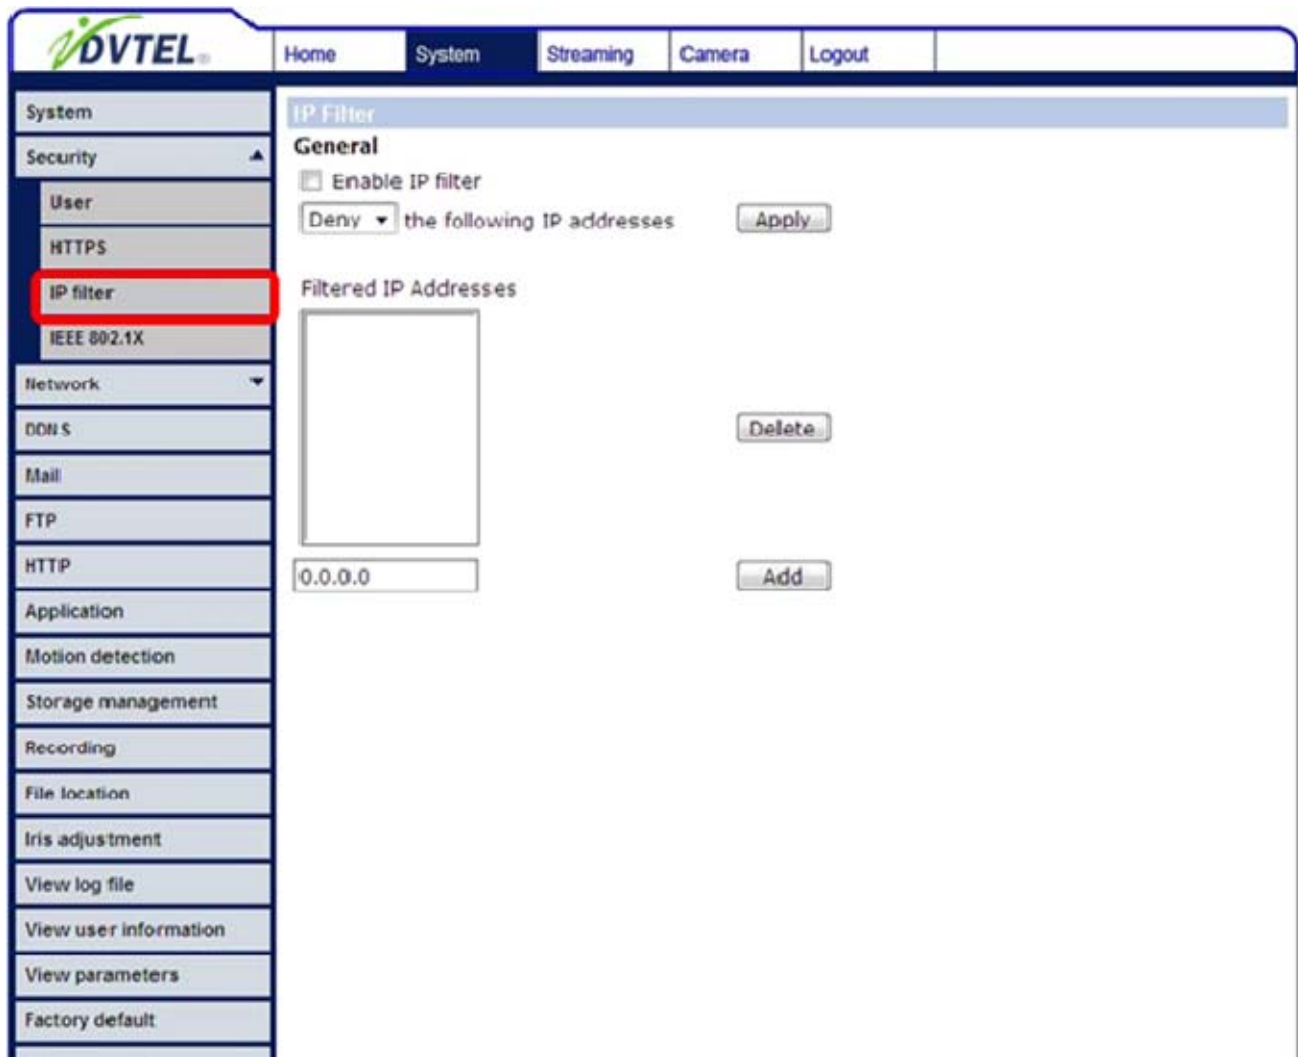

General

Enable IP Filter

Check the box to enable the IP Filter function. Once enabled, the listed IP addresses (IPv4) will be allowed/ denied access to the IP Camera.

Select **"Allow"** or **"Deny"** from the drop-down list and click the **<Apply>** button to determine the IP Filter behavior.

Add / Delete IP Address

Input the IP address and click the **<Add>** button to add a new filtered address.


The Filtered IP Addresses list box shows the currently configured IP addresses. Up to 256 IP address entries may be specified.

To remove an IP address from the list, please select the IP and then click the **<Delete>** button.

6.3.2.4 IEEE 802.1X

The IP Camera is allowed to access a network protected by 802.1X/EAPOL (Extensible Authentication Protocol over LAN).

Users need to contact with the network administrator for gaining certificates, user IDs and passwords

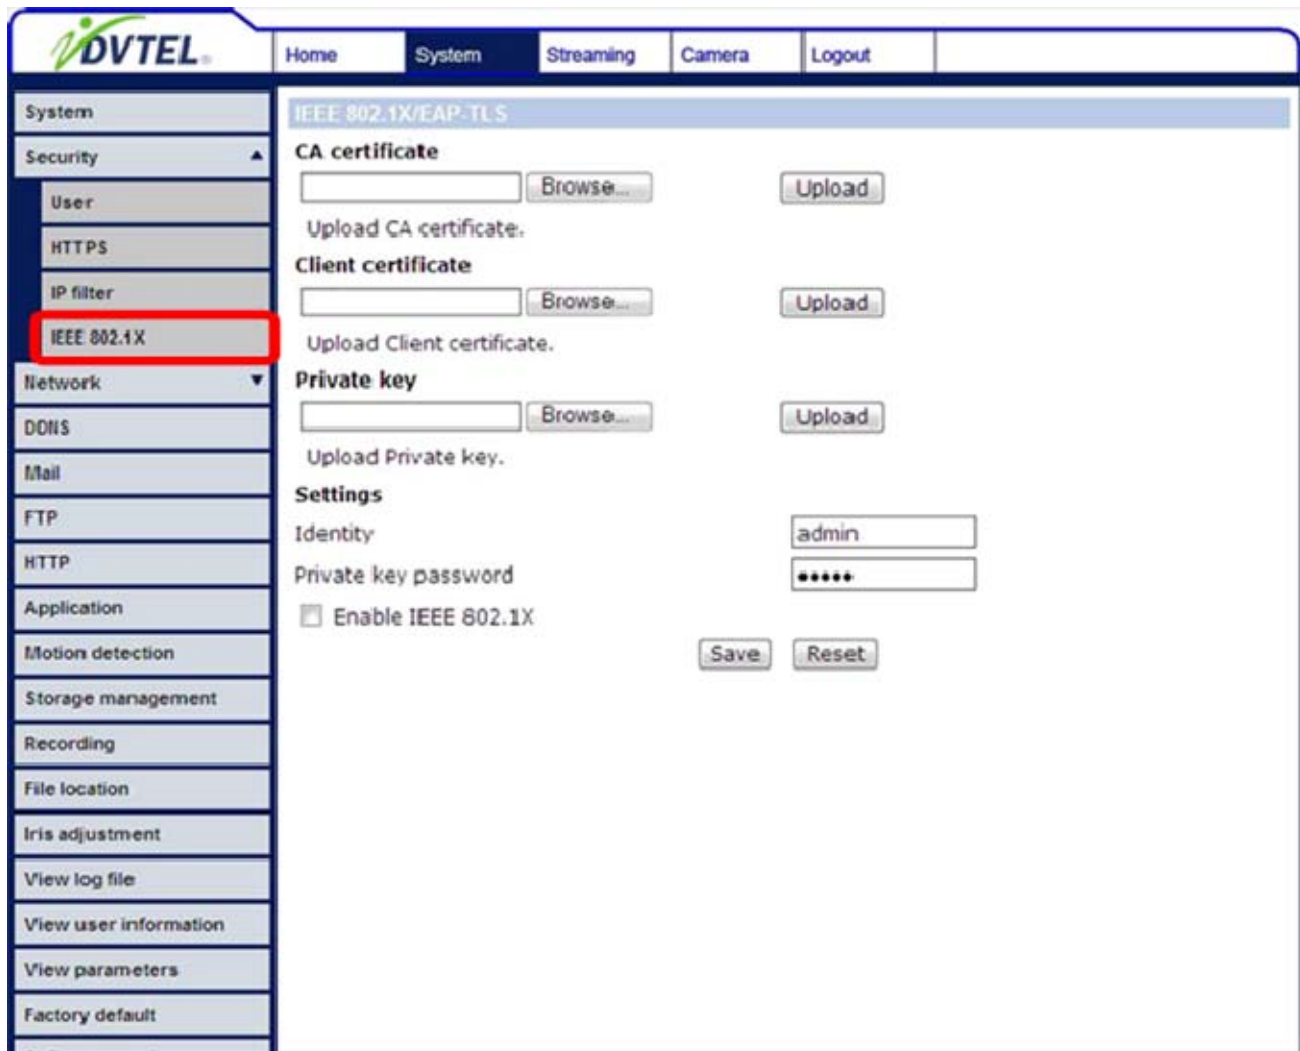

iDVTel Home System Streaming Camera Logout

System

Security ▲

- User
- HTTPS
- IP filter
- IEEE 802.1X**

Network ▼

- DHCP
- M/ail
- FTP
- HTTP
- Application
- Motion detection
- Storage management
- Recording
- File location
- Iris adjustment
- View log file
- View user information
- View parameters
- Factory default

IEEE 802.1X/EAP-TLS

CA certificate

Browse... Upload

Upload CA certificate.

Client certificate

Browse... Upload

Upload Client certificate.

Private key

Browse... Upload

Upload Private key.

Settings

Identity

Private key password

☐ Enable IEEE 802.1X

Save Reset

CA Certificate

The CA certificate is created by the Certification Authority for the purpose of validating itself. Upload the certificate for checking the server's identity.

Client Certificate / Private Key

Upload the Client Certificate and Private Key for authenticating the IP Camera itself.

Settings**Identity**

Enter the user identity associated with the certificate. Up to 16 characters can be used.

Private Key Password

Enter the password (maximum 16 characters) for your user identity.


Enable IEEE 802.1X

Check the box to enable IEEE 802.1X.

Click "**Save**" to save the IEEE 802.1X/ EAP- TLS setting.

6.3.3 Network

Click the category: < Network>, there will be a drop-down menu with tabs including <Basic>, <QoS>, <SNMP>, and <UPnP>.

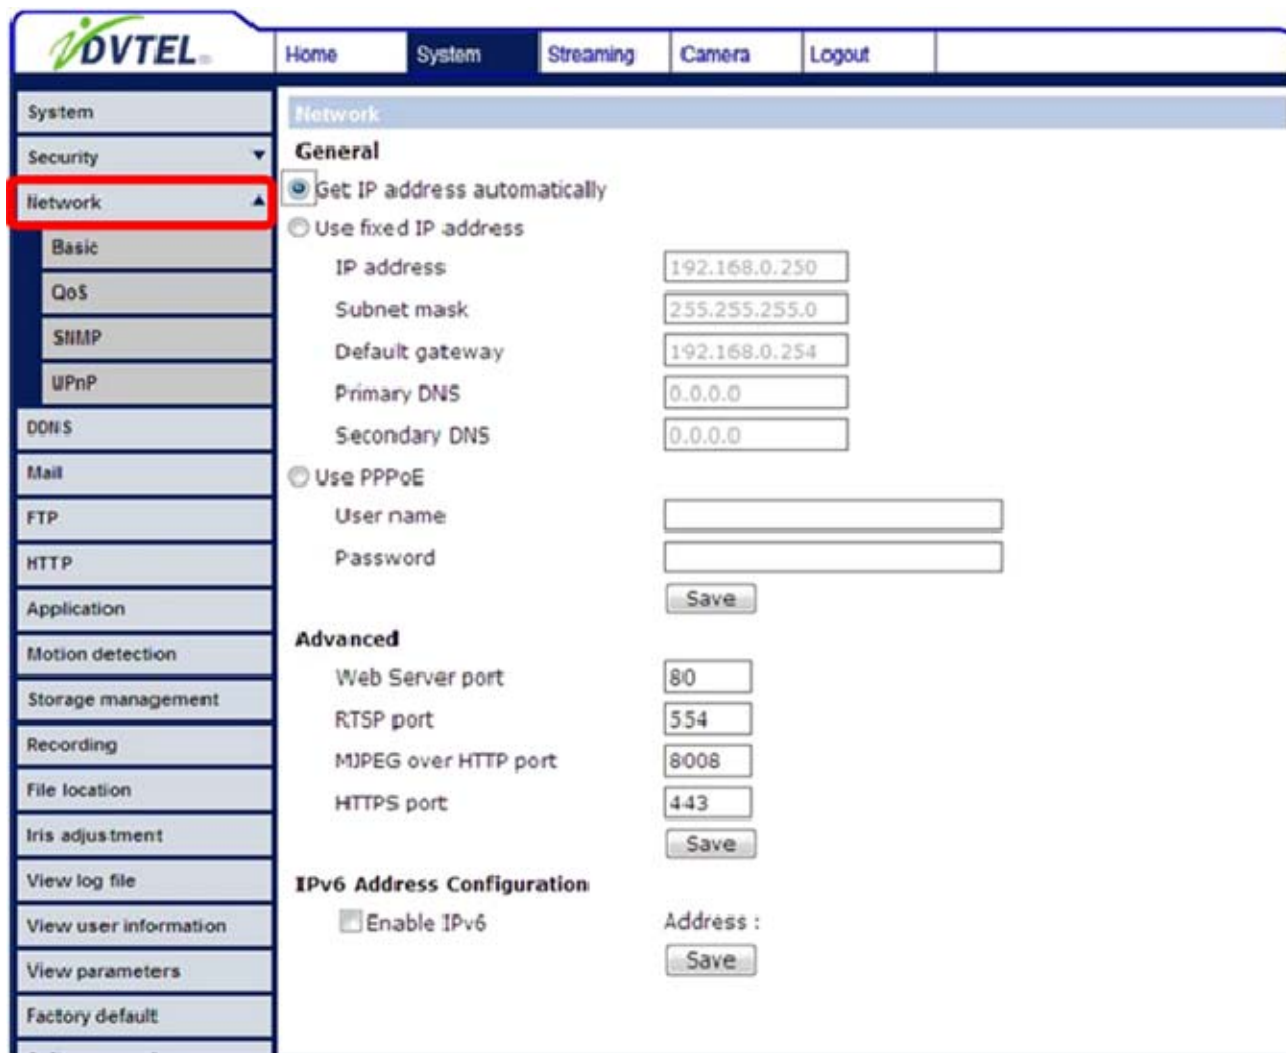

The screenshot shows the DVTel web interface. The left sidebar contains a menu with items: System, Security, Network (highlighted with a red box), Basic, QoS, SNMP, UPnP, DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, and Factory default. The main content area is titled 'Network' and has a 'General' tab selected. Under 'General', there are two radio buttons: 'Get IP address automatically' (selected) and 'Use fixed IP address'. Below these are input fields for IP address (192.168.0.250), Subnet mask (255.255.255.0), Default gateway (192.168.0.254), Primary DNS (0.0.0.0), and Secondary DNS (0.0.0.0). There is also a 'Use PPPoE' option with input fields for User name and Password, and a 'Save' button. Below this is an 'Advanced' section with input fields for Web Server port (80), RTSP port (554), MJPEG over HTTP port (8008), and HTTPS port (443), with another 'Save' button. At the bottom is an 'IPv6 Address Configuration' section with a checkbox for 'Enable IPv6' and an 'Address' input field with a 'Save' button.

Related Links

[Basic](#)


[QoS \(Quality of Service\)](#)

[SNMP \(Simple Network Management Protocol\)](#)

[UPnP](#)

6.3.3.1 Basic

Users can choose to connect to the IP Camera with fixed or dynamic (DHCP) IP address. The IP Camera also provides PPPoE (Point-to-Point Protocol over Ethernet) support for users who connect to the network via PPPoE.

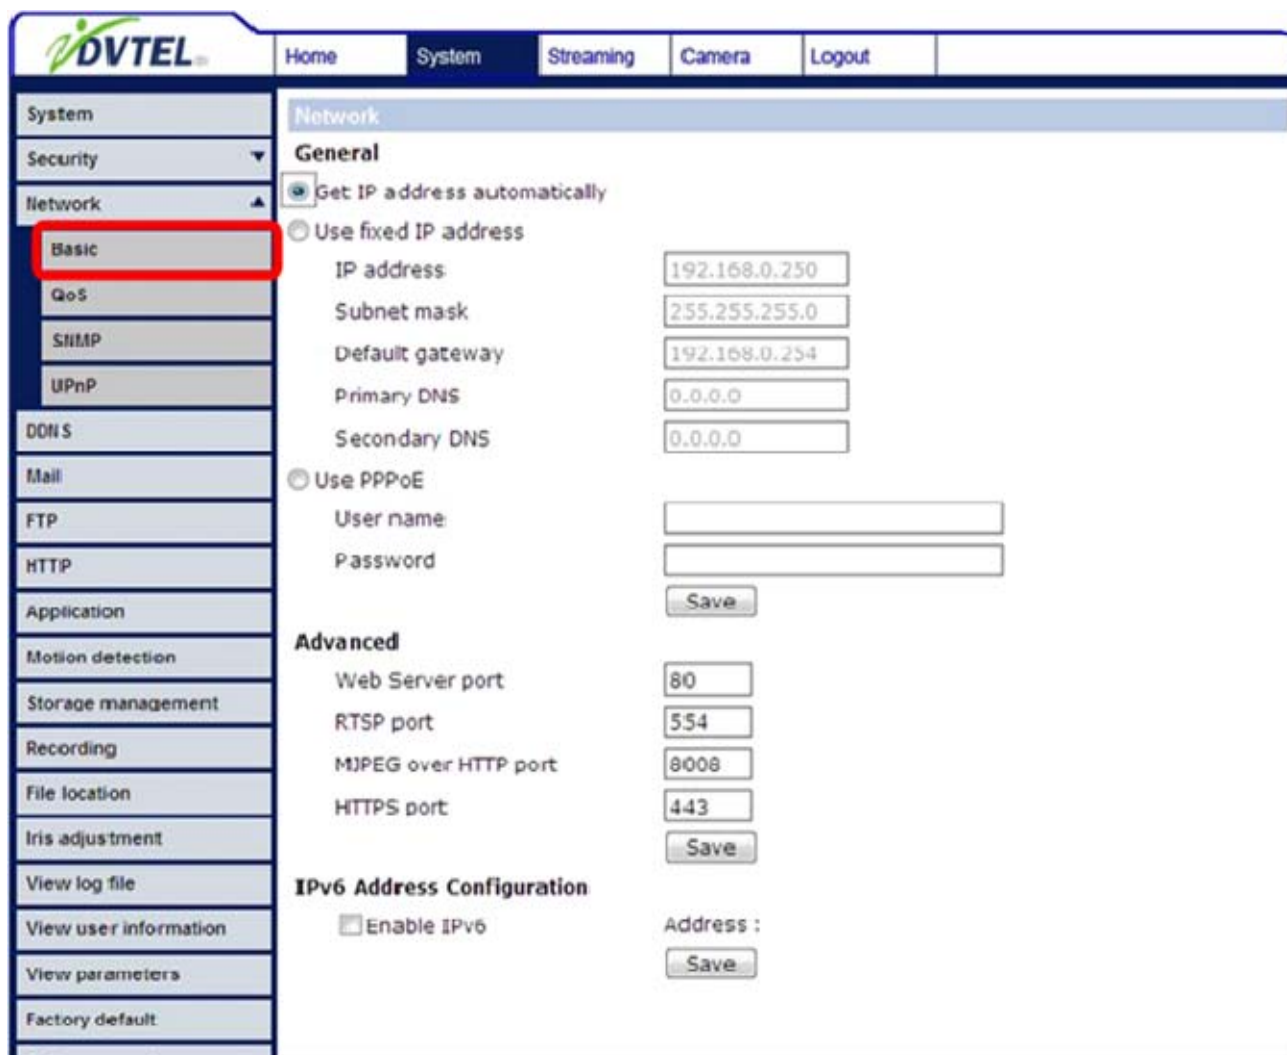

System	Home	System	Streaming	Camera	Logout
System	Network				
Security	General				
Network	☒ Get IP address automatically ☐ Use fixed IP address				
Basic	IP address: 192.168.0.250 Subnet mask: 255.255.255.0 Default gateway: 192.168.0.254 Primary DNS: 0.0.0.0 Secondary DNS: 0.0.0.0				
QoS	☐ Use PPPoE User name: Password: Save				
SNMP	Advanced				
UPnP	Web Server port: 80 RTSP port: 554 MJPEG over HTTP port: 8008 HTTPS port: 443 Save				
DON S	IPv6 Address Configuration				
Mail	☐ Enable IPv6 Address: Save				
FTP					
HTTP					
Application					
Motion detection					
Storage management					
Recording					
File location					
Iris adjustment					
View log file					
View user information					
View parameters					
Factory default					

Get IP address automatically (DHCP)

The camera's default setting is "Use fixed IP address". Please refer to the previous section [Accessing Camera](#) for login with the default IP address.


If select "Get IP address automatically", after the IP Camera restarts, users can search it through the installer program: DeviceSearch.exe, which can be found in "DeviceSearch" folder in the supplied CD.



NOTE: Please make the record of the IP Camera's MAC address, which can be found in the label of the camera, for identification in the future.

Use fixed IP address


To setup static IP address, select "**Use fixed IP address**" and move the cursor to the IP address blank (as indicated below) and insert the new IP address, ex. 192.168.7.123; then go to the Default gateway (explained latter) blank and change the setting, ex. 192.168.7.254. Press "**Save**" to confirm the new setting.

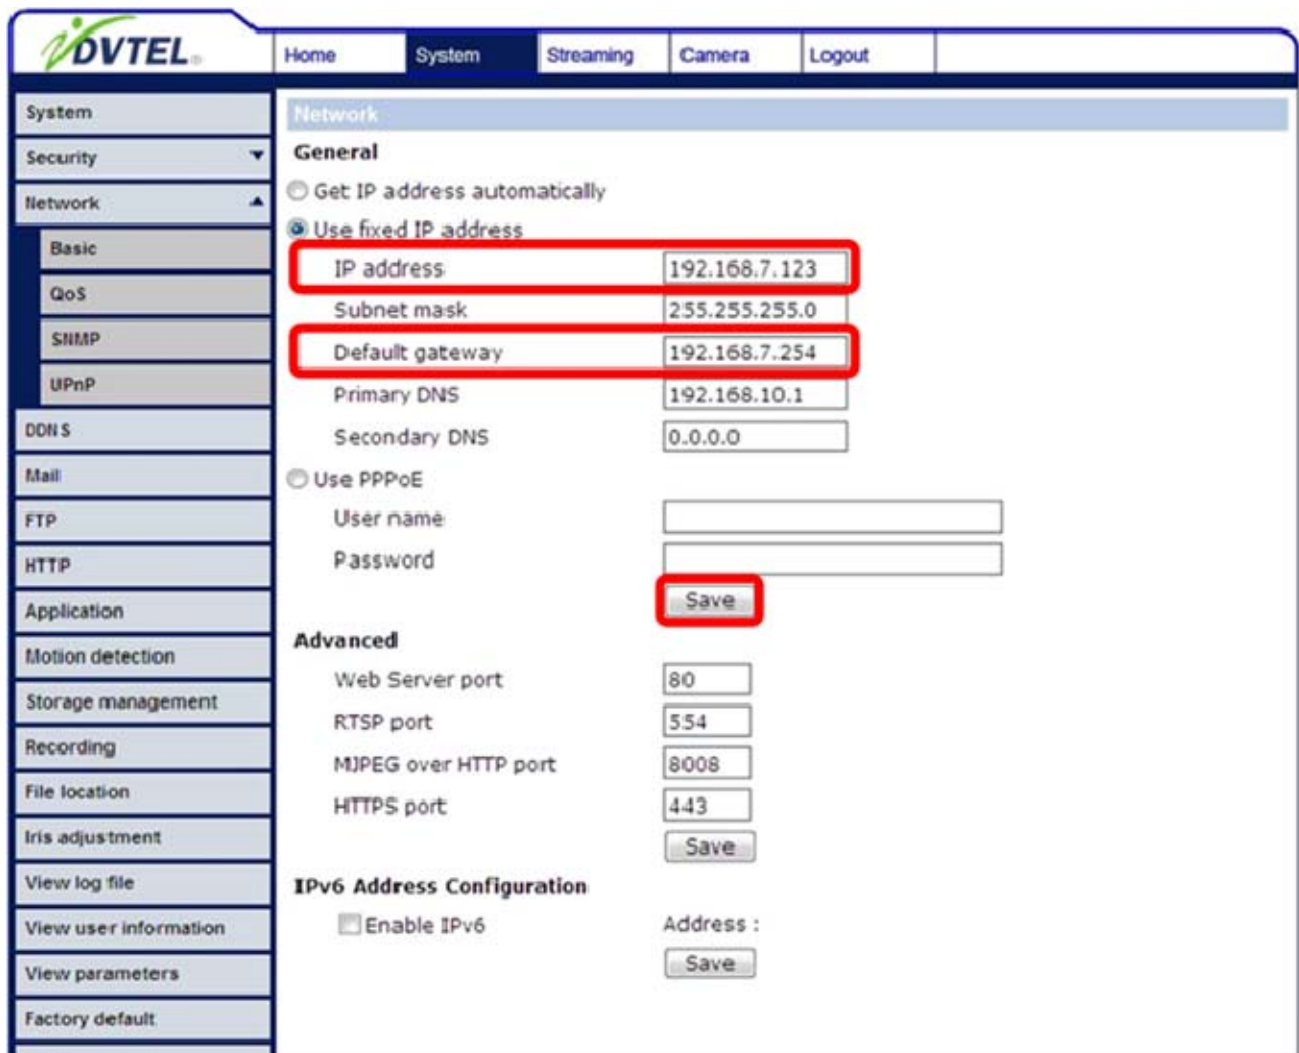

The screenshot shows the DVTel web interface with the following configuration details:

- System** (selected in the top menu)
- Network** (selected in the left sidebar)
- General** (selected in the sub-menu)
- Use fixed IP address** (selected radio button)
- IP address:** 192.168.7.123
- Subnet mask:** 255.255.255.0
- Default gateway:** 192.168.7.254
- Primary DNS:** 192.168.10.1
- Secondary DNS:** 0.0.0.0
- Use PPPoE** (unselected radio button)
- User name:** (empty field)
- Password:** (empty field)
- Save** (button)
- Advanced** (section header)
- Web Server port:** 80
- RTSP port:** 554
- MJPEG over HTTP port:** 8008
- HTTPS port:** 443
- Save** (button)
- IPv6 Address Configuration** (section header)
- Enable IPv6** (checkbox, unchecked)
- Address:** (empty field)
- Save** (button)

When using static IP address to login to the IP Camera, users can access it either through "DeviceSearch" software (see [Accessing Camera](#)) or input the IP address in the URL bar and press "Enter".

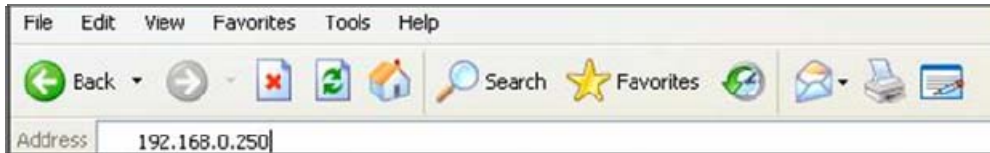

- **IP address**
This is necessary for network identification.
- **Subnet mask**
It is used to determine if the destination is in the same subnet. The default value is "255.255.255.0".
- **Default gateway**
This is the gateway used to forward frames to destinations in different subnet. Invalid gateway setting will fail the transmission to destinations in different subnet.
- **Primary DNS**
Primary DNS is the primary domain name server that translates hostnames into IP addresses.
- **Secondary DNS**
Secondary DNS is a secondary domain name server that backups the primary DNS.
- **Use PPPoE**
For the PPPoE users, enter the PPPoE Username and Password into the fields, and click on the "Save" button to complete the setting.

Advanced

- **Web Server port**
The default web server port is 80. Once the port is changed, the user must be notified the change for the connection to be successful. For instance, when the Administrator changes the HTTP port of the IP Camera whose IP address is 192.168.0.100 from 80 to 8080, the user must type in the web browser "http://192.168.0.100:8080" instead of http://192.168.0.100
- **RTSP port**
The default setting of RTSP Port is 554; the setting range is from 1024 to 65535.
- **MJPEG over HTTP port**
The default setting of MJPEG over HTTP Port is 8008; the setting range is from 1024 to 65535.
- **HTTPS port**
The default setting of HTTPS Port is 443; the setting range is from 1024 to 65535.




NOTE: Be aware to assign a different port number for each separate service mentioned above.

IPv6 Address Configuration

With IPv6 support, users can use the corresponding IPv6 address for browsing. Enable IPv6 by checking the box and click **"Save"** to complete the setting.

6.3.3.2 QoS (Quality of Service)

QoS allows providing differentiated service levels for different types of traffic packets, which guarantees delivery of priority services especially when network congestion occurs. Adapting the Differentiated Services (DiffServ) model, traffic flows are classified and marked with DSCP (DiffServ Codepoint) values, and thus receive the corresponding forwarding treatment from DiffServ capable routers.

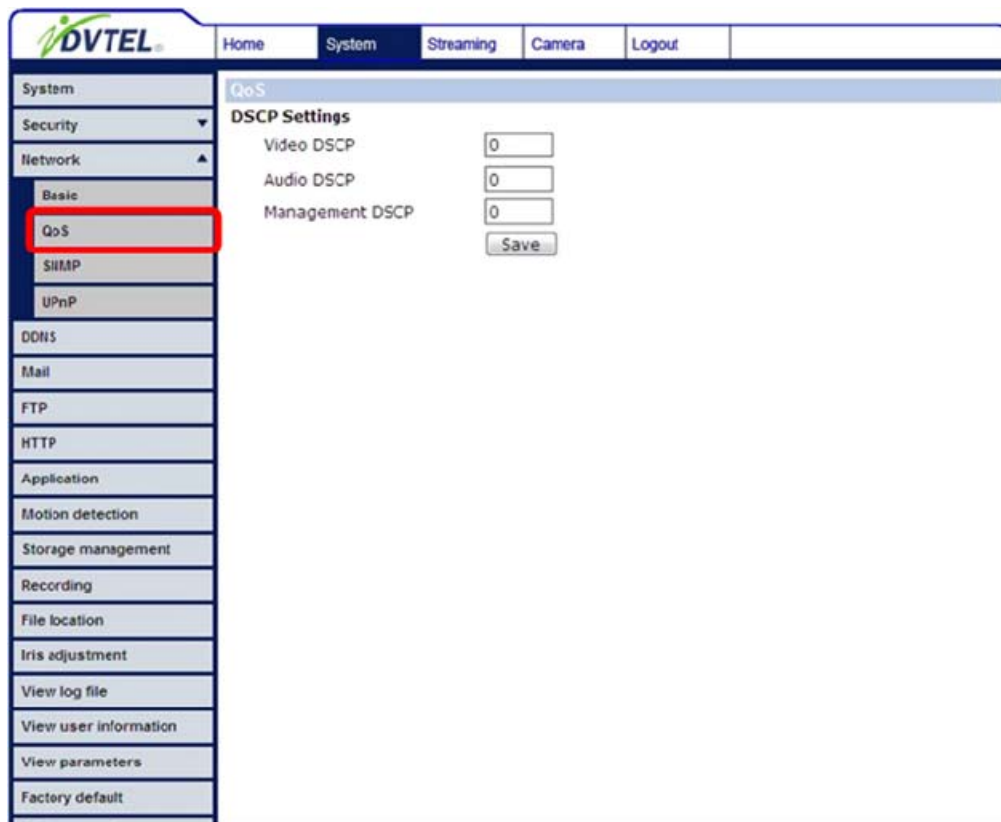

QoS	
DSCP Settings	
Video DSCP	0
Audio DSCP	0
Management DSCP	0
Save	

DSCP Settings

The DSCP value range is from 0 to 63. The default DSCP value is 0, which means DSCP disabled.

The IP Camera uses the following QoS Classes: Video, Audio and Management.

- **Video**
The class consists of applications such as MJPEG over HTTP, RTP/RTSP and RTSP/HTTP.
- **Audio**
This setting is only available for the IP Cameras that support audio.
- **Management**
The class consists of HTTP traffic: Web browsing.


Click the **"Save"** button when complete.



NOTE: To enable this function, please make sure the switches/routers in the network support QoS.

6.3.3.3 SNMP (Simple Network Management Protocol)

With Simple Network Management Protocol (SNMP) support, the IP Camera can be monitored and managed remotely by the network management system.

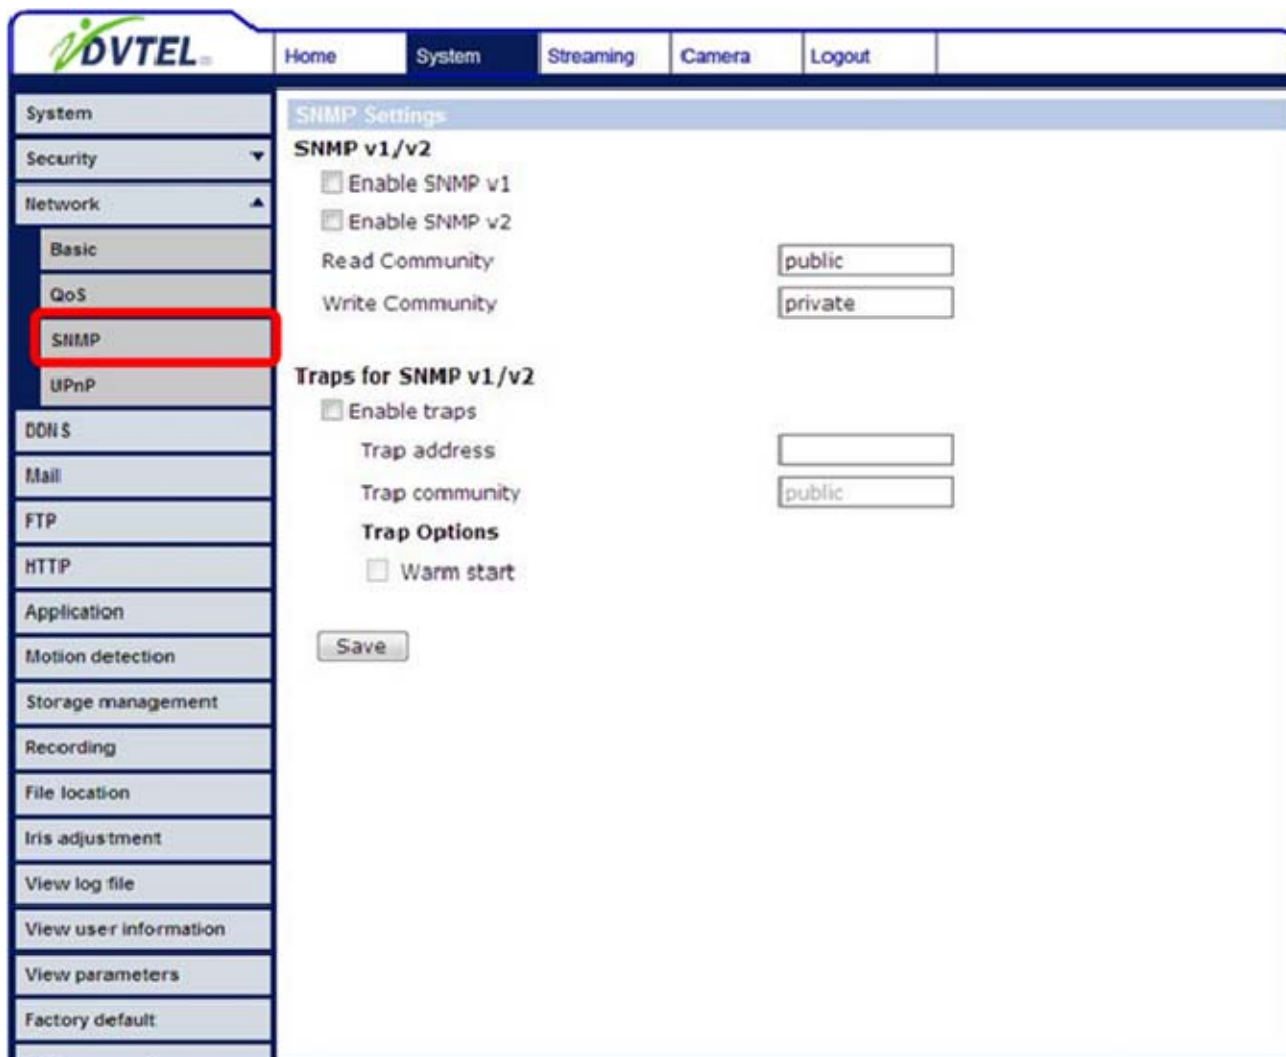

The screenshot displays the DVTel web interface for configuring the IP camera. The left sidebar contains a menu with categories like System, Security, and Network. The 'Network' category is expanded, and the 'SNMP' option is highlighted with a red rectangle. The main content area is titled 'SNMP Settings' and contains the following sections:

- SNMP v1/v2**
 - ☐ Enable SNMP v1
 - ☐ Enable SNMP v2
 - Read Community:
 - Write Community:
- Traps for SNMP v1/v2**
 - ☐ Enable traps
 - Trap address:
 - Trap community:
- Trap Options**
 - ☐ Warm start
-

SNMP v1 / v2

- **Enable SNMP**
Select the version of SNMP to use by checking the box.
- **Read Community**
Specify the community name that has read-only access to all supported SNMP objects. The default value is "public".
- **Write Community**
Specify the community name that has read/write access to all supported SNMP objects (except read-only objects). The default value is "write".


Traps for SNMP v1 / v2

Traps are used by the IP Camera to send messages to a management system for important events or status changes.

- **Enable Traps**
Check the box to activate trap reporting.
- **Trap address**
Enter the IP address of the management server.
- **Trap community**
Enter the community to use when sending a trap message to the management system.
- **Trap Option**
- **Warm Start**
A Warm Start SNMP trap signifies that the SNMP device, i.e. IP Camera, performs software reload.

Click the "**Save**" button when complete.

6.3.3.4 UPnP

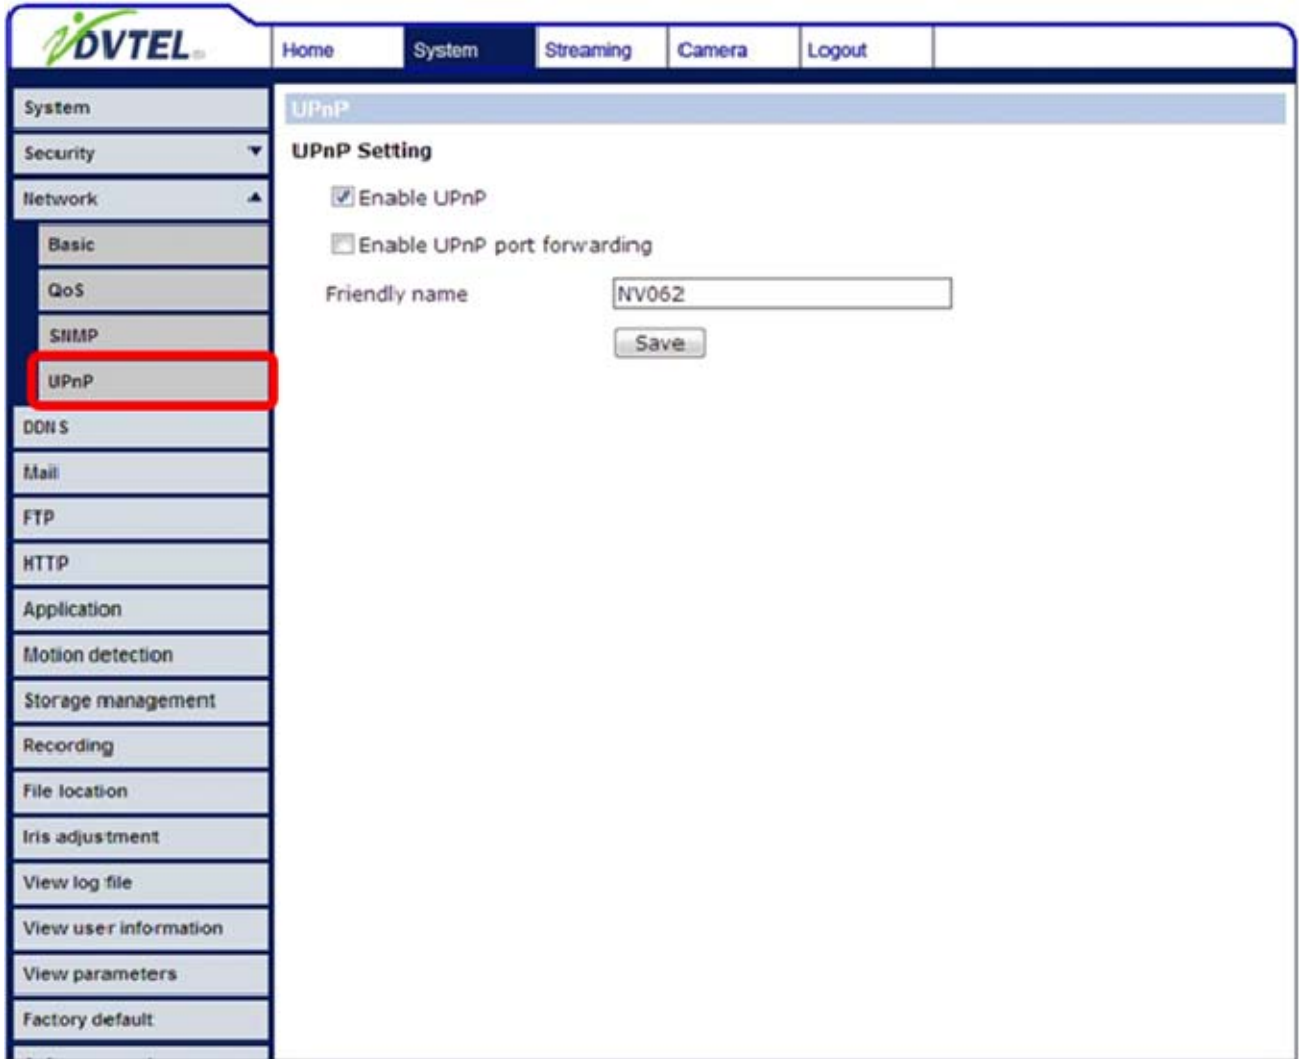


The screenshot displays the DVTEL web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a menu with various system settings, including System, Security, Network, Basic, QoS, SNMP, UPnP (highlighted with a red box), DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, and Factory default. The main content area is titled 'UPnP' and shows the 'UPnP Setting' configuration. It includes two checkboxes: 'Enable UPnP' (checked) and 'Enable UPnP port forwarding' (unchecked). Below these is a text field for 'Friendly name' containing the value 'NV062'. A 'Save' button is located at the bottom of the settings area.

UPnP Setting

- **Enable UPnP**

When the UPnP is enable, whenever the IP Camera is presented to the LAN, the icon of the connected IP Cameras will appear in My Network Places to allow for direct access as shown below.

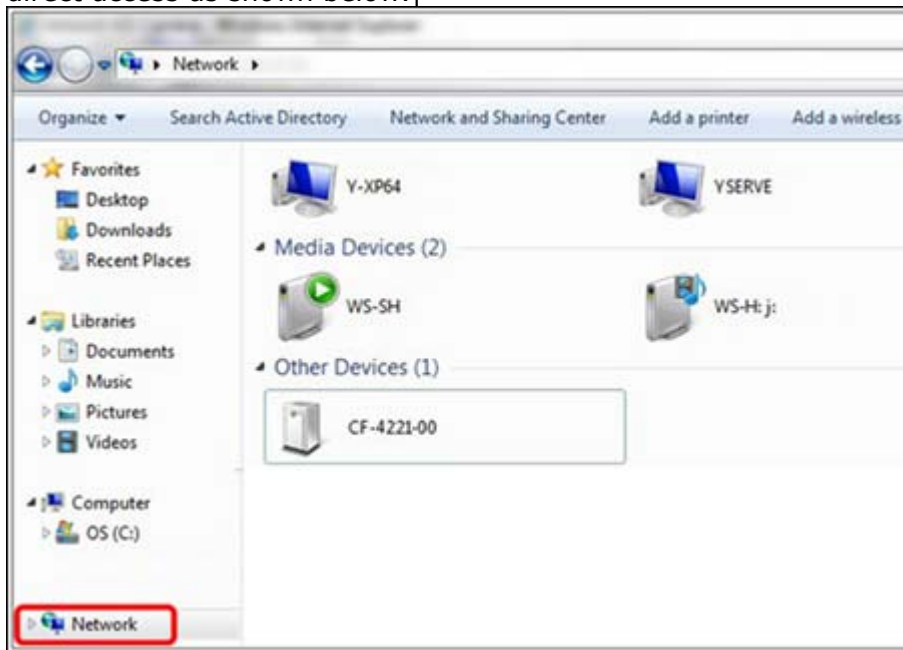

NOTE: To enable this function, please make sure the UPnP component is installed on your computer. Please refer to Enable UPnP discovery for the Windows 7 procedure.

- **Enable UPnP port forwarding**

When the UPnP port forwarding is enabled, the IP Camera is allowed to open the web server port on the router automatically.




NOTE: To enable this function, please make sure that your router supports UPnP and it is activated

- **Friendly name**

Set the name for the IP Camera for identity.

6.3.4 DDNS

Dynamic Domain Name System (DDNS) allows a host name to be constantly synchronized with a dynamic IP address. In other words, it allows those using a dynamic IP address to be associated to a static domain name so others can connect to it by name.

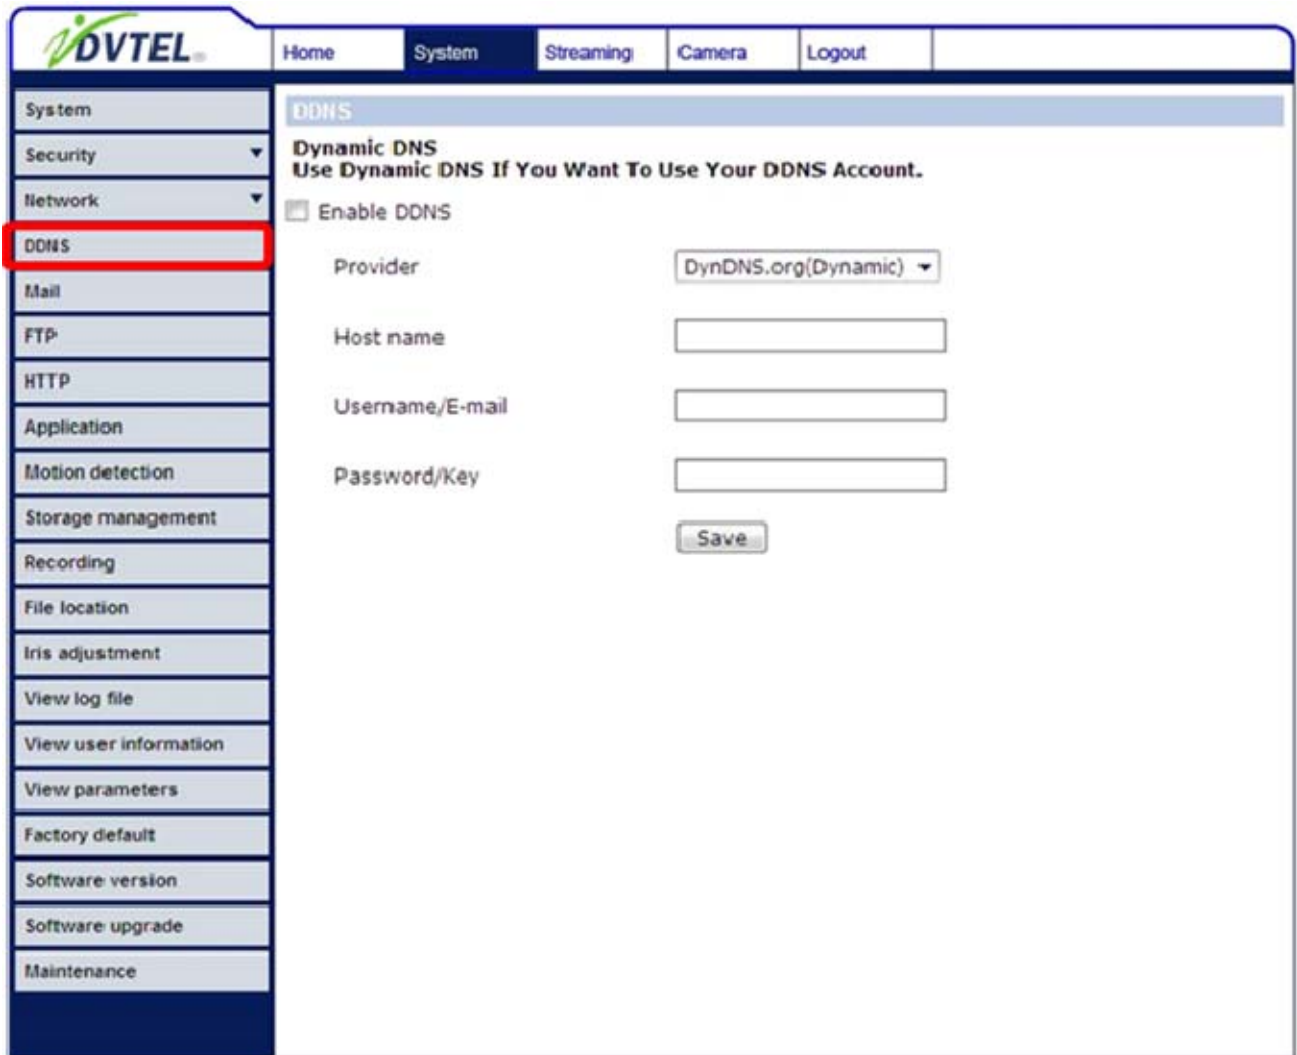

DVTEL Home System Streaming Camera Logout

System

Security

Network

DDNS

Mail

FTP

HTTP

Application

Motion detection

Storage management

Recording

File location

Iris adjustment

View log file

View user information

View parameters

Factory default

Software version

Software upgrade

Maintenance

DDNS

Dynamic DNS
Use Dynamic DNS If You Want To Use Your DDNS Account.

☐ Enable DDNS

Provider: DynDNS.org(Dynamic)

Host name:

Username/E-mail:

Password/Key:

Save


Enable DDNS

Check the item to enable DDNS.

- **Provider**
Select one DDNS host from the provider list.
- **Host name**
Enter the registered domain name in the field.
- **Username / E-mail**
Enter the username or e-mail required by the DDNS provider for authentication.
- **Password / Key**
Enter the password or key required by the DDNS provider for authentication.

6.3.5 Mail

The Administrator can send an e-mail via Simple Mail Transfer Protocol (SMTP) when an alarm is triggered. SMTP is a protocol for sending e-mail messages between servers. SMTP is a relatively simple, text-based protocol, where one or more recipients of a message are specified and the message text is transferred. The configuration page is shown as follows:

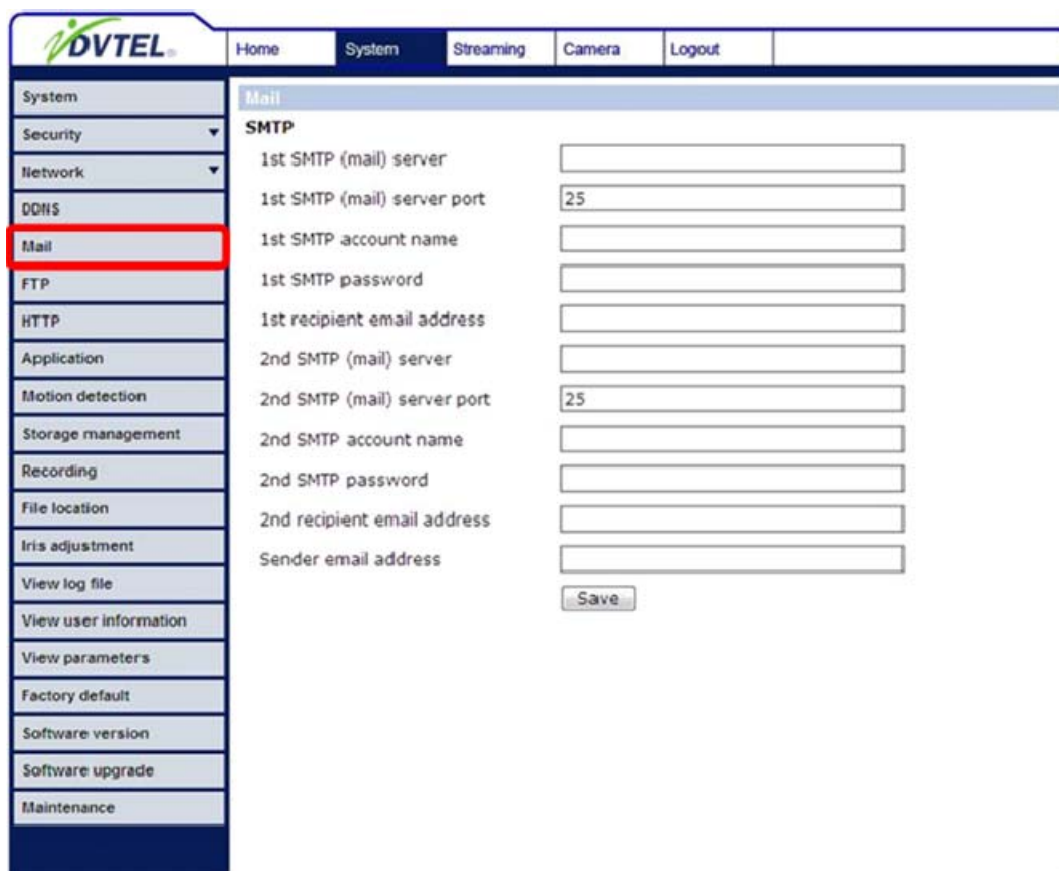


Mail	
SMTP	
1st SMTP (mail) server	
1st SMTP (mail) server port	25
1st SMTP account name	
1st SMTP password	
1st recipient email address	
2nd SMTP (mail) server	
2nd SMTP (mail) server port	25
2nd SMTP account name	
2nd SMTP password	
2nd recipient email address	
Sender email address	
Save	

Two sets of SMTP can be configured. Each set includes SMTP Server, Account Name, Password and E-mail Address settings. For SMTP server, contact your network service provider for more specific information.

6.3.6 FTP

The Administrator can set as sending alarm message to a specific File Transfer Protocol (FTP) site when motion is detected. Users can assign alarm message to up to two FTP sites. The FTP setting page is shown below. Enter the FTP details, which include server, server port, user name, password and remote folder, in the fields. Press **"Save"** when finished.

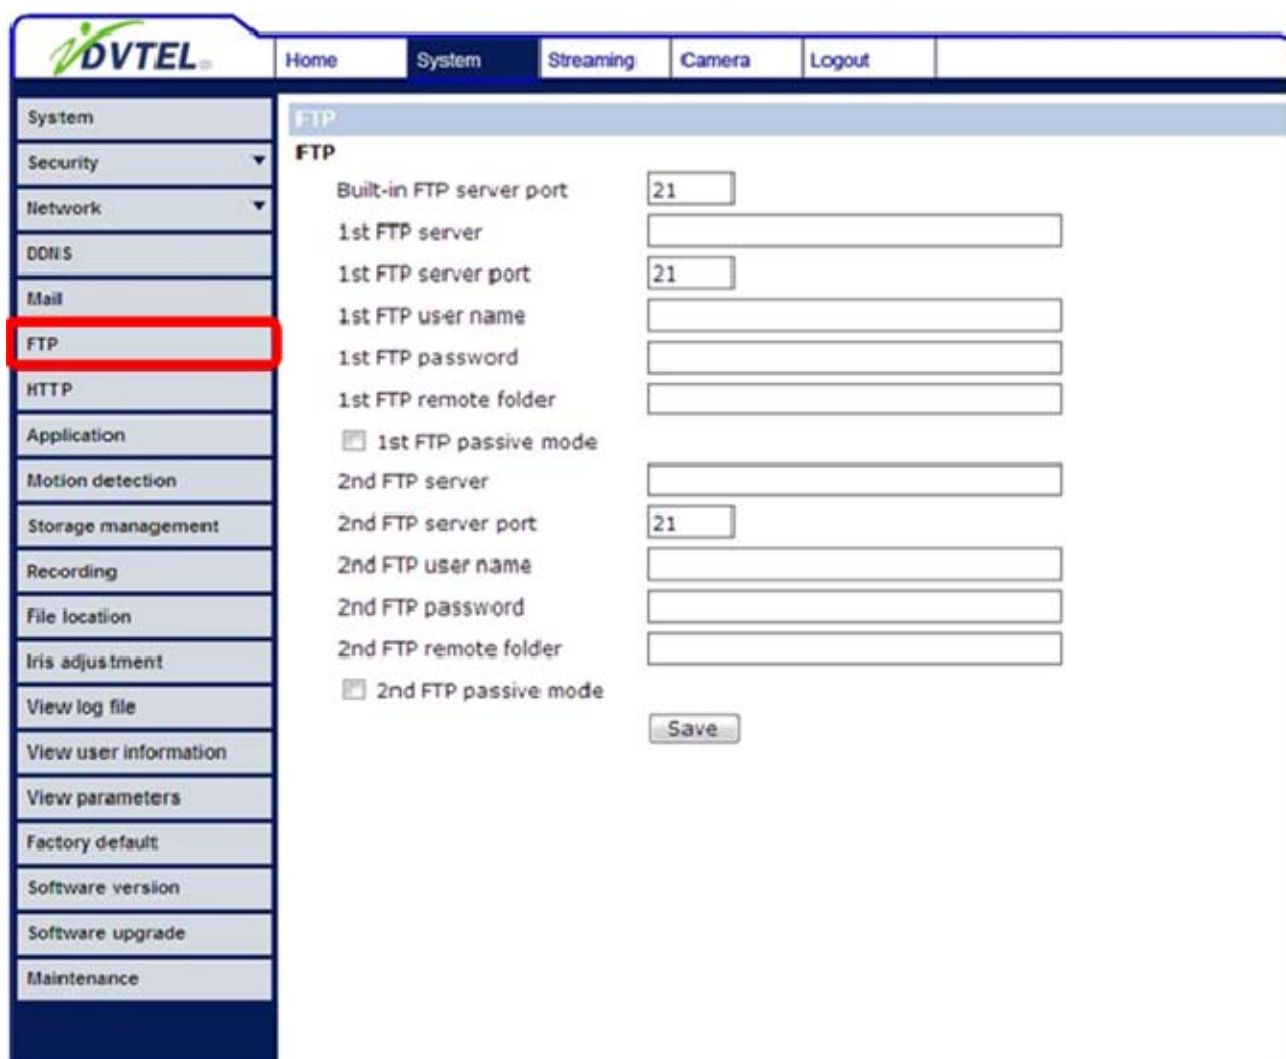

The screenshot shows the DVTel web interface with the 'FTP' menu item highlighted in the left sidebar. The main content area is titled 'FTP' and contains the following configuration fields:

- Built-in FTP server port: 21
- 1st FTP server: [text input]
- 1st FTP server port: 21
- 1st FTP user name: [text input]
- 1st FTP password: [text input]
- 1st FTP remote folder: [text input]
- ☐ 1st FTP passive mode
- 2nd FTP server: [text input]
- 2nd FTP server port: 21
- 2nd FTP user name: [text input]
- 2nd FTP password: [text input]
- 2nd FTP remote folder: [text input]
- ☐ 2nd FTP passive mode


A 'Save' button is located at the bottom right of the configuration area.

6.3.7 HTTP

A HTTP Notification server can listen for notification messages from IP Cameras by triggered events. The HTTP setting page is shown below. Enter the HTTP details, which include server,

user name, and password in the fields. <Alarm> triggered and <Motion Detection> notifications can be sent to the specified <HTTP> server.

Click "**Save**" when finished.

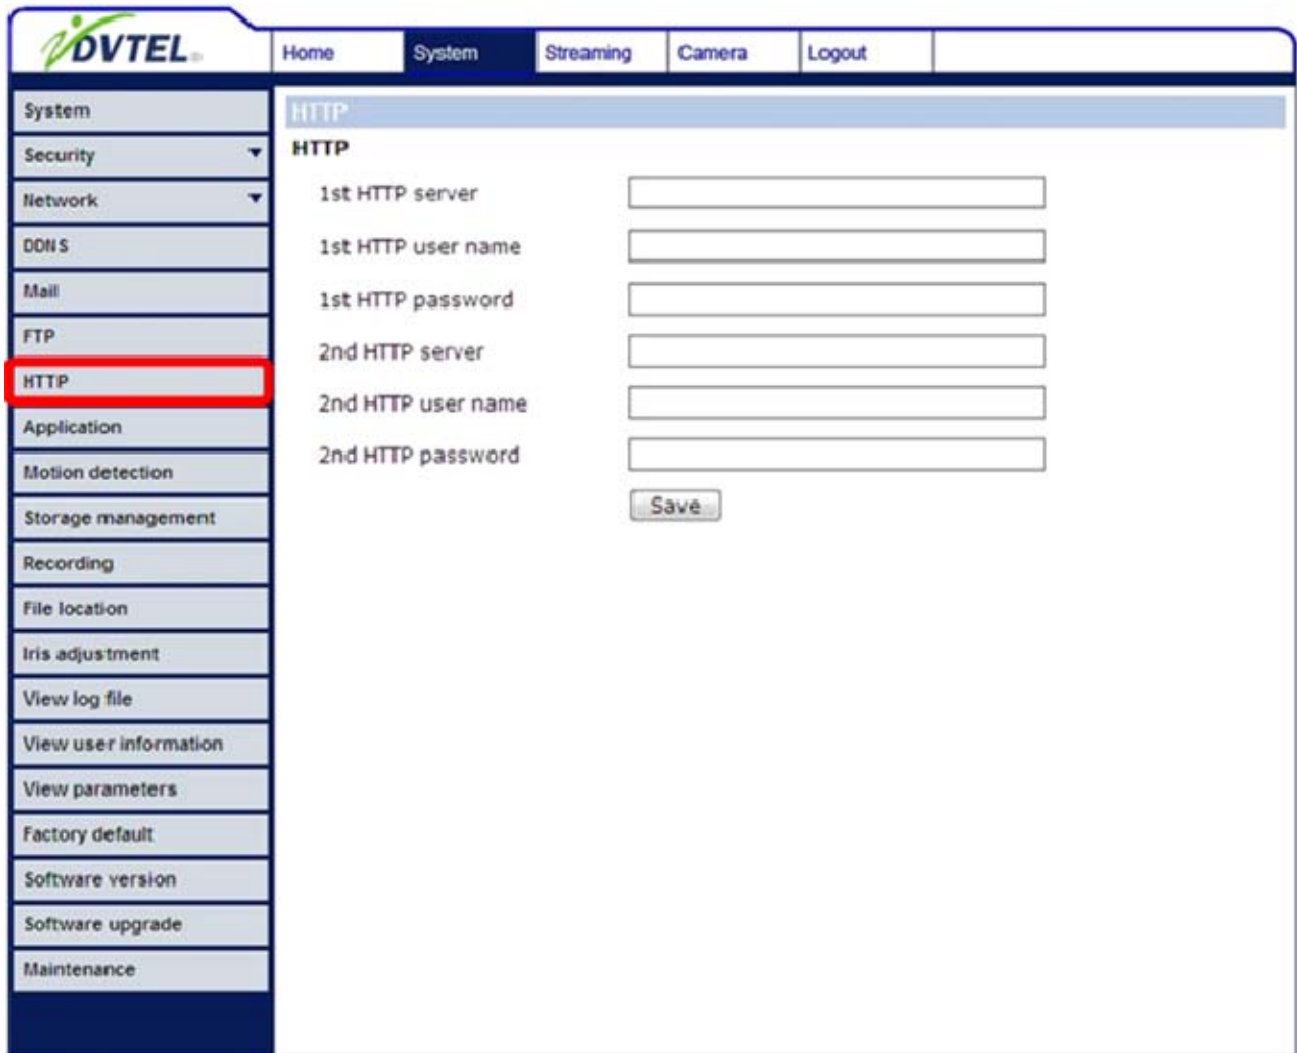

The screenshot shows the DVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a menu with various system settings, and the 'HTTP' option is highlighted with a red rectangle. The main content area is titled 'HTTP' and contains the following configuration fields:


Field	Input Type
1st HTTP server	Text box
1st HTTP user name	Text box
1st HTTP password	Text box
2nd HTTP server	Text box
2nd HTTP user name	Text box
2nd HTTP password	Text box
Save	Button


Please refer to: 7.3.8 Application: Send HTTP notification/ 7.3.9 Motion Detection for HTTP Notification settings.

6.3.8 Application

The IP Camera has one alarm input and one relay output for connection to external alarm devices. Refer to alarm pin definition below to connect alarm devices to the IP Camera if needed. The alarm configuration page is also shown below.

Alarm Pin Definition

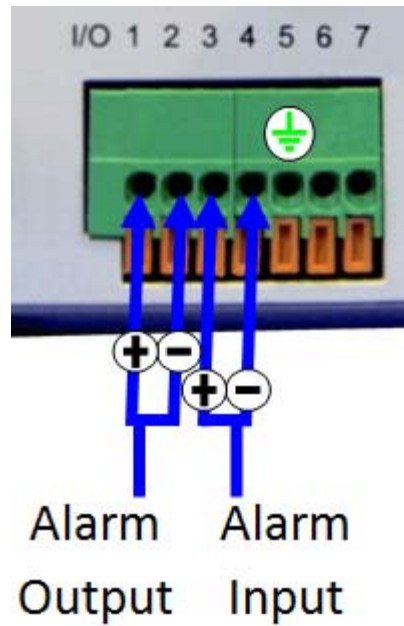

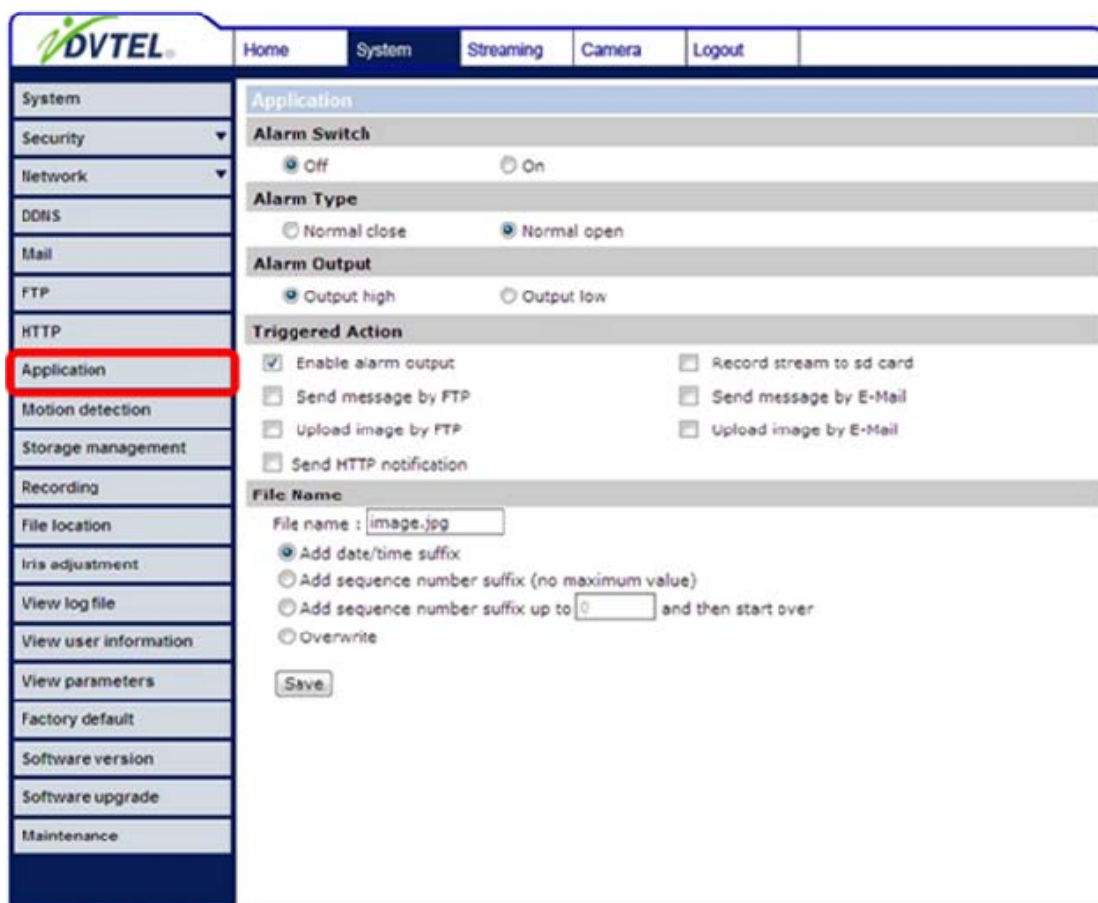

The screenshot shows the DVTEL web interface. The left sidebar contains a menu with items: System, Security, Network, DDNS, Mail, FTP, HTTP, **Application** (highlighted with a red box), Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'Application' and contains the following sections:

- Alarm Switch:** Radio buttons for 'Off' (selected) and 'On'.
- Alarm Type:** Radio buttons for 'Normal close' and 'Normal open' (selected).
- Alarm Output:** Radio buttons for 'Output high' (selected) and 'Output low'.
- Triggered Action:** A list of checkboxes:
 - ☒ Enable alarm output
 - ☐ Send message by FTP
 - ☐ Upload image by FTP
 - ☐ Send HTTP notification
 - ☐ Record stream to sd card
 - ☐ Send message by E-Mail
 - ☐ Upload image by E-Mail
- File Name:**
 - File name:
 - ☒ Add date/time suffix
 - ☐ Add sequence number suffix (no maximum value)
 - ☐ Add sequence number suffix up to and then start over
 - ☐ Overwrite
 -

Alarm Switch

The Administrator can enable or disable the alarm function.

Alarm Type

Select an alarm type, "**Normal close**" or "**Normal open**," that corresponds with the alarm application.


Alarm Output

Define alarm output signal "high" or "low" as the normal alarm output status according to the current alarm application.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when the alarm is triggered. All options are listed as follows:

- **Enable Alarm Output**
Select the item to enable alarm relay output.
- **Send Alarm Message by FTP/E-Mail**
The Administrator can select whether to send an alarm message by FTP and/or E-Mail when an alarm is triggered.
- **Upload Image by FTP**
Select this item, and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When the alarm is triggered, event images will be uploaded to the appointed FTP site.

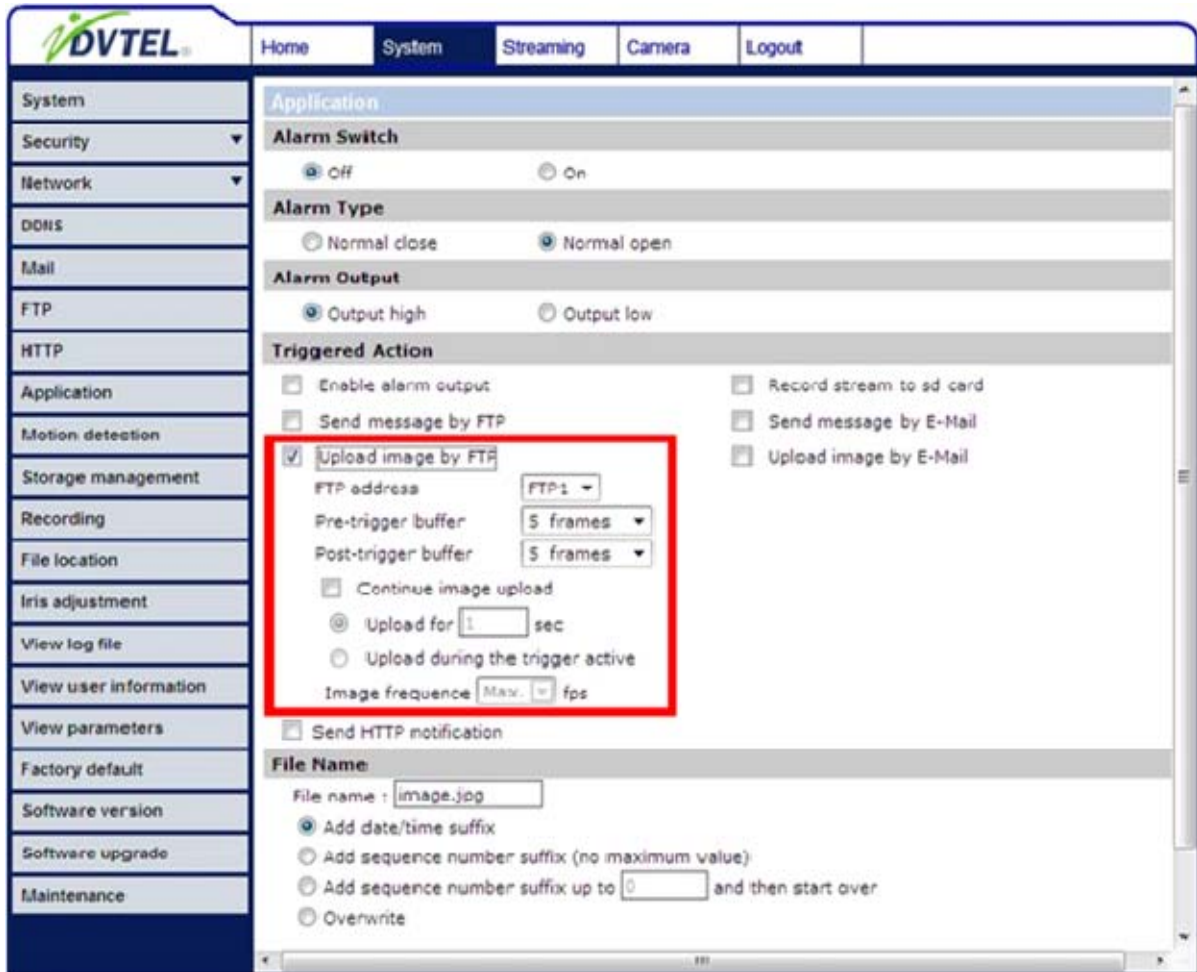

The screenshot shows the DVTel web interface with the 'System' tab selected. The left sidebar contains a menu with options: System, Security, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'Application' and contains the following sections:

- Alarm Switch:** Radio buttons for 'Off' (selected) and 'On'.
- Alarm Type:** Radio buttons for 'Normal close' and 'Normal open' (selected).
- Alarm Output:** Radio buttons for 'Output high' (selected) and 'Output low'.
- Triggered Action:**
 - ☐ Enable alarm output
 - ☐ Send message by FTP
 - ☒ Upload image by FTP (highlighted with a red box)
 - ☐ Record stream to sd card
 - ☐ Send message by E-Mail
 - ☐ Upload image by E-Mail

Within the 'Upload image by FTP' section, the following parameters are visible:


- FTP address: FTP1
- Pre-trigger buffer: 5 frames
- Post-trigger buffer: 5 frames
- ☐ Continue image upload
- ☒ Upload for 1 sec
- ☐ Upload during the trigger active
- Image frequency: Max. fps
- ☐ Send HTTP notification

The 'File Name' section at the bottom includes:

- File name: image.jpg
- ☒ Add date/time suffix
- ☐ Add sequence number suffix (no maximum value)
- ☐ Add sequence number suffix up to 0 and then start over
- ☐ Overwrite

- **Record Stream to SD Card**

Select the item, and the alarm-triggered recording will be saved into your Micro SD card.

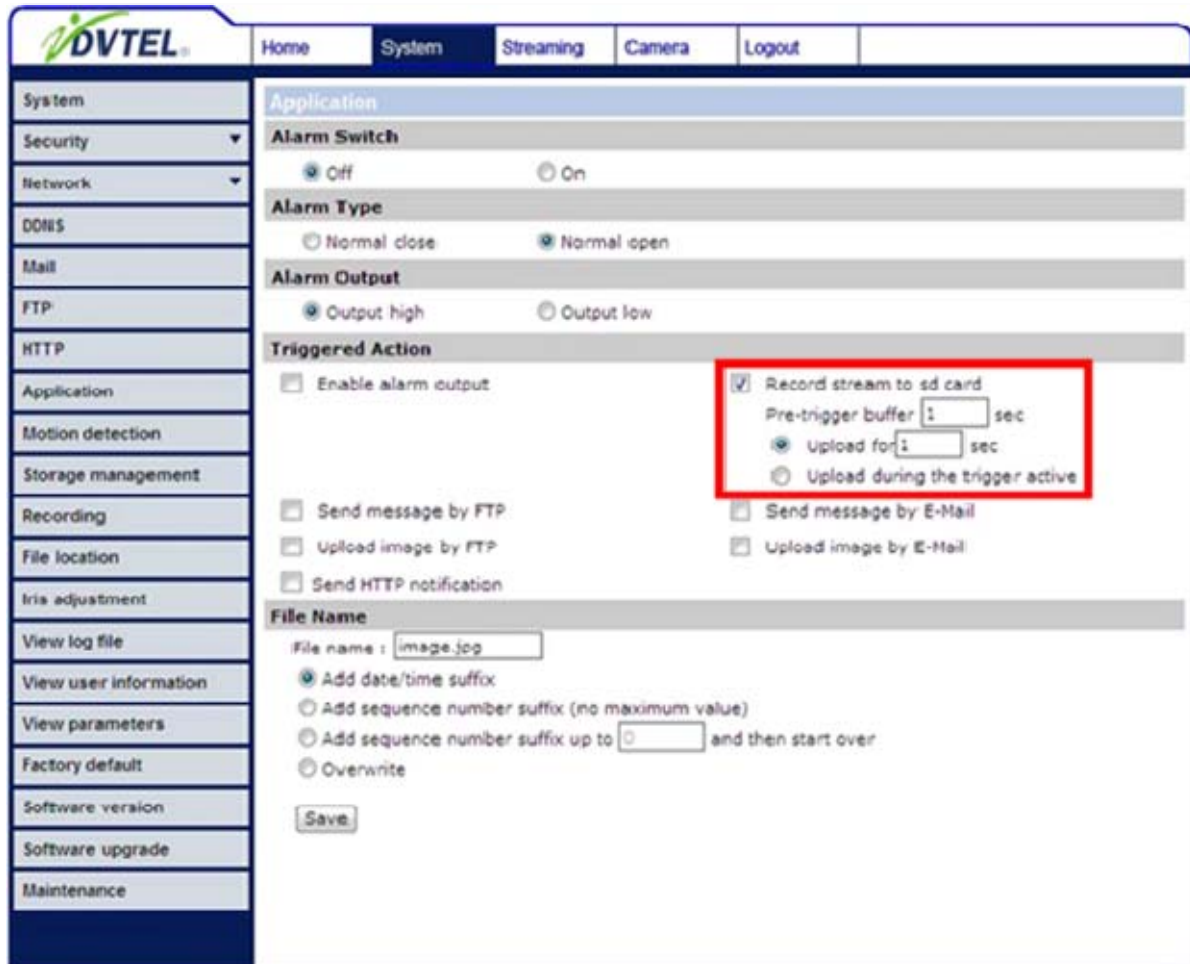


The screenshot shows the iDVTel web interface with the 'System' tab selected. The left sidebar contains a menu with options like System, Security, Network, DOIS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'Application' and contains the 'Alarm Switch' configuration. The 'Alarm Switch' is set to 'Off'. The 'Alarm Type' is set to 'Normal open'. The 'Alarm Output' is set to 'Output high'. The 'Triggered Action' section is highlighted with a red box and contains the following options: 'Enable alarm output' (unchecked), 'Record stream to sd card' (checked), 'Pre-trigger buffer 1 sec', 'Upload for 1 sec' (selected), 'Upload during the trigger active' (unchecked), 'Send message by FTP' (unchecked), 'Send message by E-Mail' (unchecked), 'Upload image by FTP' (unchecked), 'Upload image by E-Mail' (unchecked), and 'Send HTTP notification' (unchecked). The 'File Name' section shows 'File name: image.jpg' and options for 'Add date/time suffix' (selected), 'Add sequence number suffix (no maximum value)', 'Add sequence number suffix up to 0 and then start over', and 'Overwrite'. A 'Save' button is at the bottom.



NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. See section [Recording](#) for further details.


- Upload Image by E-Mail**
 Select this item, and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When the alarm is triggered, event images will be sent to the appointed e-mail address.

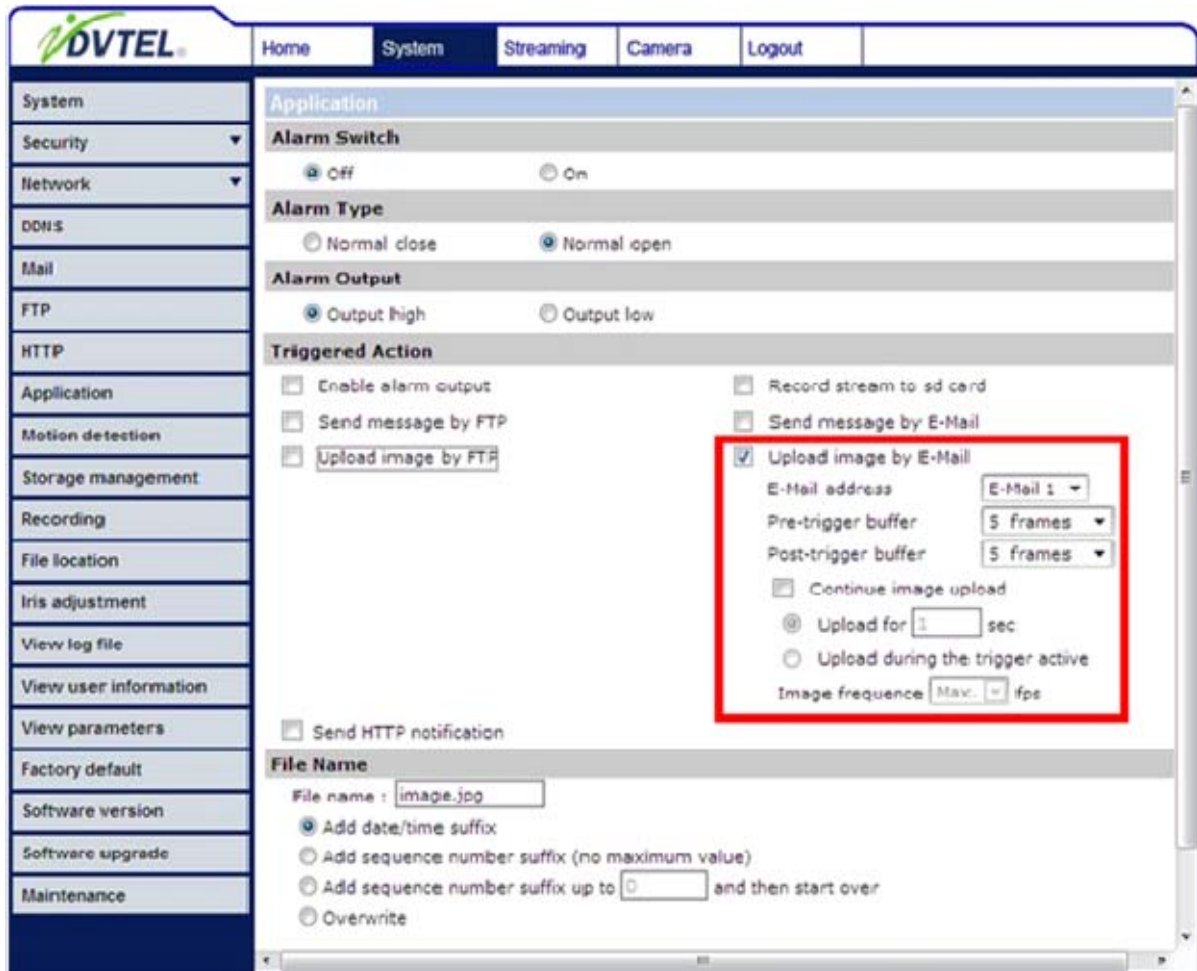


NOTE: Make sure SMTP or FTP configuration has been completed. See section [Mail](#) and [FTP](#) for further details.

- **Send HTTP notification**

Check this item, select the destination HTTP address, and specify the parameters for event notifications by <Alarm> triggered. When an alarm is triggered, the notification can be sent to the specified HTTP server.

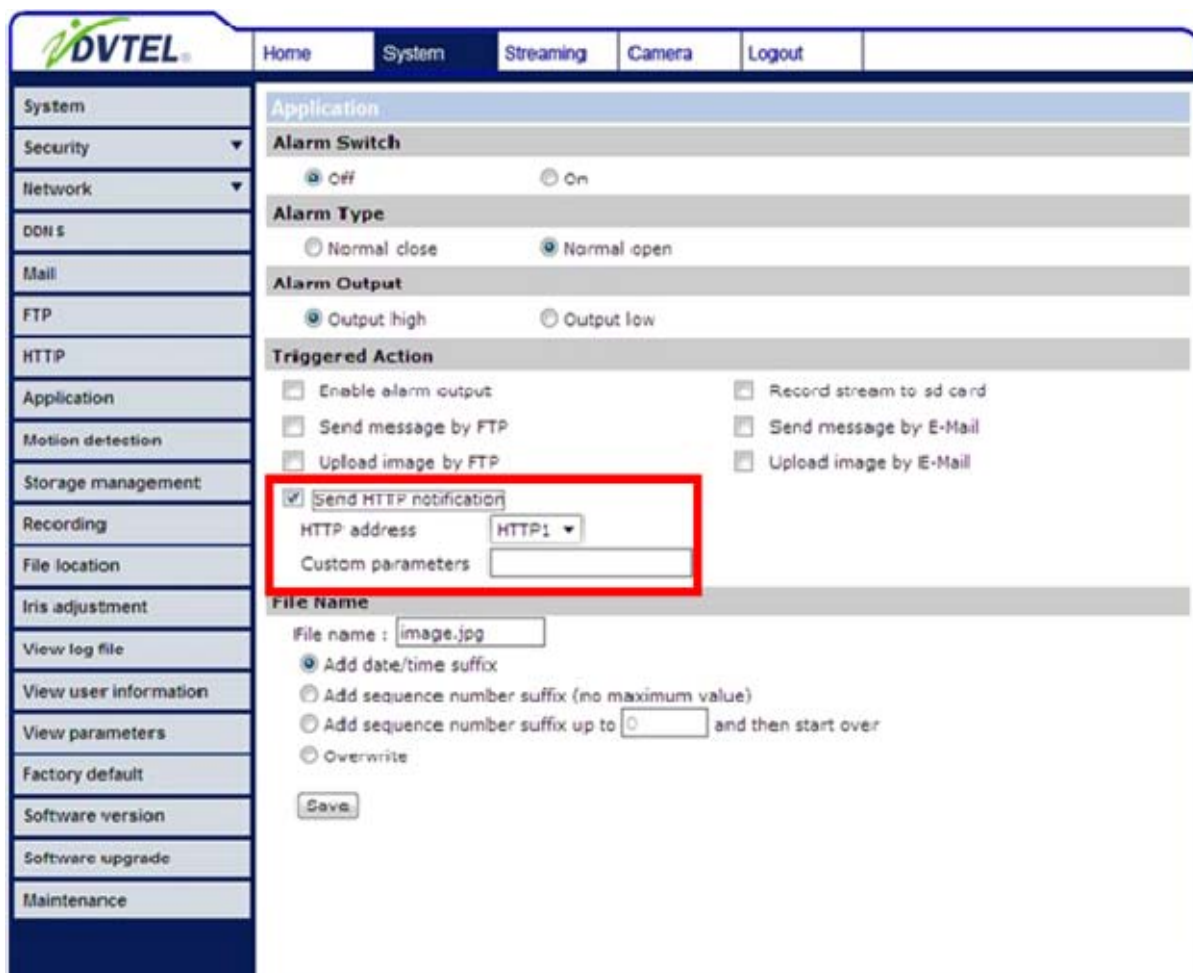

The screenshot shows the DVTel web interface with the 'System' menu selected. The 'Application' tab is active, and the 'Alarm Switch' section is expanded. The 'Send HTTP notification' checkbox is checked and highlighted with a red box. The 'HTTP address' dropdown is set to 'HTTP1'. The 'File Name' section shows 'image.jpg' as the default file name.

File Name

Enter a file name in the blank, ex. image.jpg. The uploaded image's file name format can be set in this section. Please select the one that meets your requirements.

- **Add date / time suffix**

File name: imageYYMMDD_HHNNSS_XX.jpg

Y: Year, M: Month, D: Day

H: Hour, N: Minute, S: Second

X: Sequence Number


- **Add sequence number suffix (no maximum value)**
File name: imageXXXXXXX.jpg
X: Sequence Number
- **Add sequence number suffix (limited value)**
File Name: imageXX.jpg
X: Sequence Number
The file name suffix will end at the number being set. For example, if the setting is up to "10," the file name will start from 00, end at 10, and then start all over again.
- **Overwrite**
The original image in the FTP site will be overwritten by the new uploaded file with a static filename.

Save

After complete all the settings mentions above, please click on the Save button to save all the settings in this page.

6.3.9 Motion Detection

Motion Detection function allows detecting suspicious motion and triggering alarms when motion volume in the detected area reaches/exceeds the determined sensitivity threshold value.

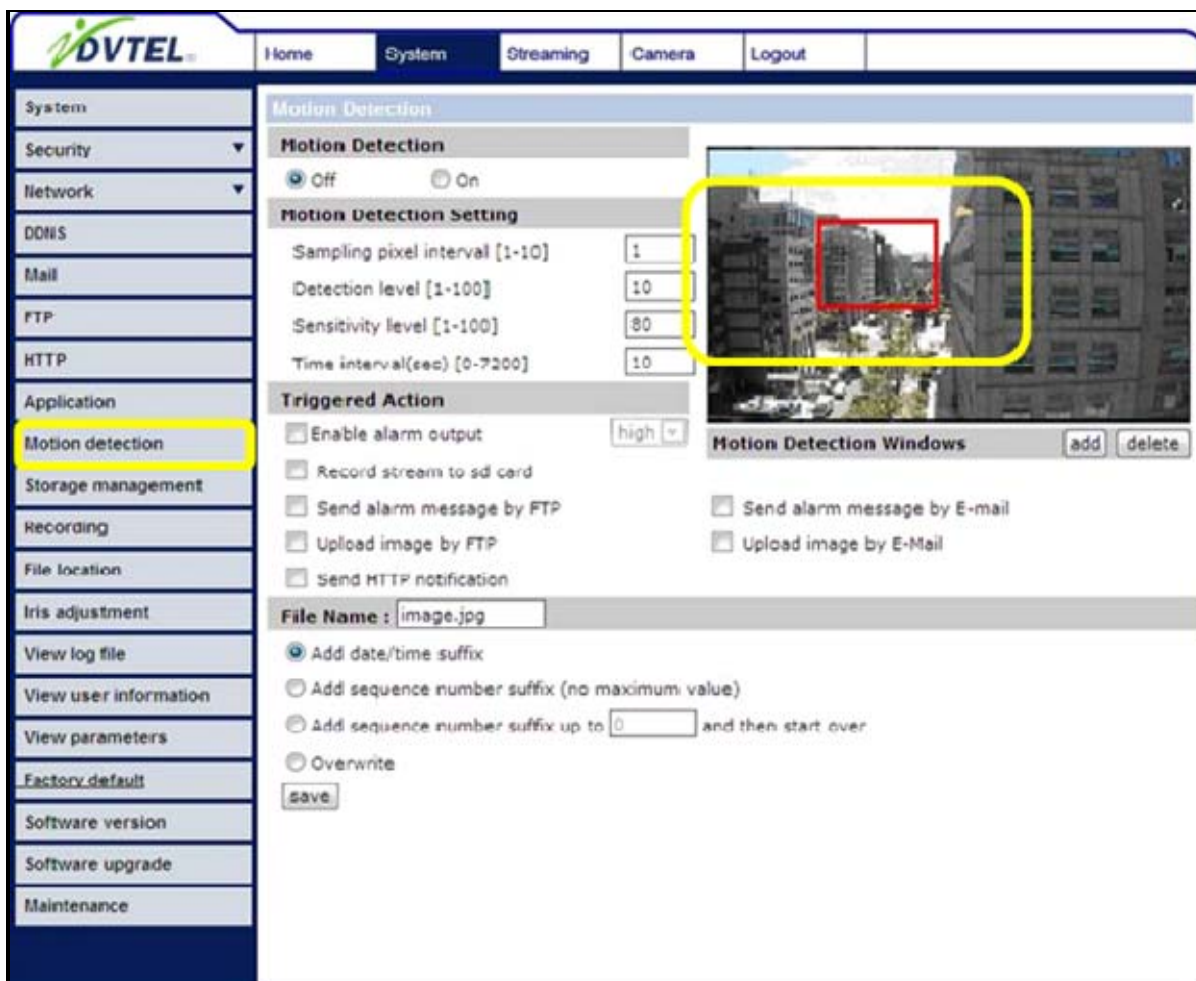


In the Motion Detection setting page, there is a frame (**Motion Detection Window**) displayed on the Live View Pane. The Motion Detection Window is for defining the motion detection area. To change the size of the Motion Detection Window, move the mouse cursor to the edge of the frame and draw it outward/inward. Moving the mouse to the center of the frame can shift the frame to the intended location.

Up to 10 Motion Detection Windows can be set. Press the **"Add"** button under the Live Video Pane to add a Motion Detection Window. To cancel a Motion Detection Window, move the mouse cursor to the selected Window, and click on the **"Delete"** button.

If Motion Detection function is activated, the pop-off window (Motion) with indication of motion will be shown.



When motion is detected, the signals will be displayed on the Motion window as shown below.

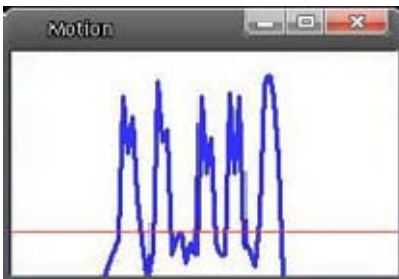

Detailed settings of Motion Detection are described as follows:

Motion Detection

You will be able to turn on/off Motion Detection in System section. Default setting is Off.

Motion Detection Setting

Users could adjust various parameters of Motion Detection in this section.

- **Sampling pixel interval [1-100]:**
The default value is 10, which means system will take one sampling pixel for every 10 pixel.
- **Detection level [1-100]:**
The default level is 10. The item is to set detection level for each sampling pixel; the smaller the value, the more sensitive it is.
- **Sensitivity level [1-100]:**
The default level is 80, which means if 20% or more sampling pixels are detected differently, system will detect motion. The bigger the value, the more sensitive it is. Meanwhile, when the value is bigger, the red horizontal line in the motion indication window will be lower accordingly.
- **Time interval (sec) [0-7200]:**
The default interval is 10. The value is the interval between each detected motion.

Triggered Action (Multi-option)


The Administrator can specify alarm actions that will take when motion is detected. All options are listed as follows:

- **Enable Alarm Output**
Check the item and select the predefined type of alarm output to enable alarm relay output when motion is detected.
- **Record stream to SD Card**
Select this item, and the Motion Detection recording will be stored in Micro SD/ SDHC card when motion is detected.




NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. See section [Recording](#) for further details.

- **Send Alarm Message by FTP/E-Mail**
The Administrator can select whether to send an alarm message by FTP and/or E-Mail when motion is detected.
- **Upload Image by FTP**
Select this item, and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When motion is detected, event images will be uploaded to the appointed FTP site.

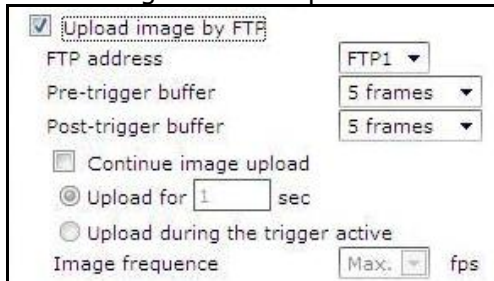

- **Upload Image by E-Mail**
Select this item, and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When motion is detected, event images will be sent to the appointed e-mail address.

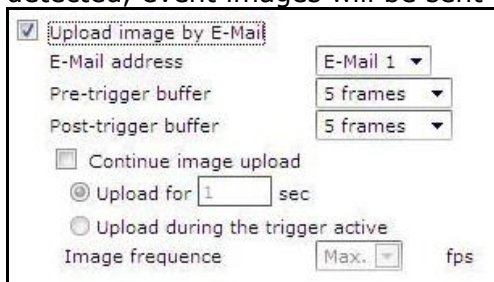

NOTE: Make sure SMTP or FTP configuration has been completed. See section [Mail](#)

and [FTP](#) for further details.

- **Send HTTP notification**

Check this item, select the destination HTTP address, and specify the parameters for event notifications by <Motion Detection> triggered. When an alarm is triggered, the notification can be sent to the specified HTTP server.

☒	Send HTTP notification
HTTP address	HTTP1 ▼
Custom parameters	

File Name


The uploaded image's filename format can be set in this section. Please select the one that meets your requirements.

Save

Click the Save button to save all the Motion Detection settings mentioned above.

6.3.10 Tampering

Tampering Alarm function helps the IP Camera against tampering such as deliberate redirection, blocking, paint spray, and lens cover, etc through video analysis and reaction to such events by sending out notifications or uploading snapshots to the specified destination(s).

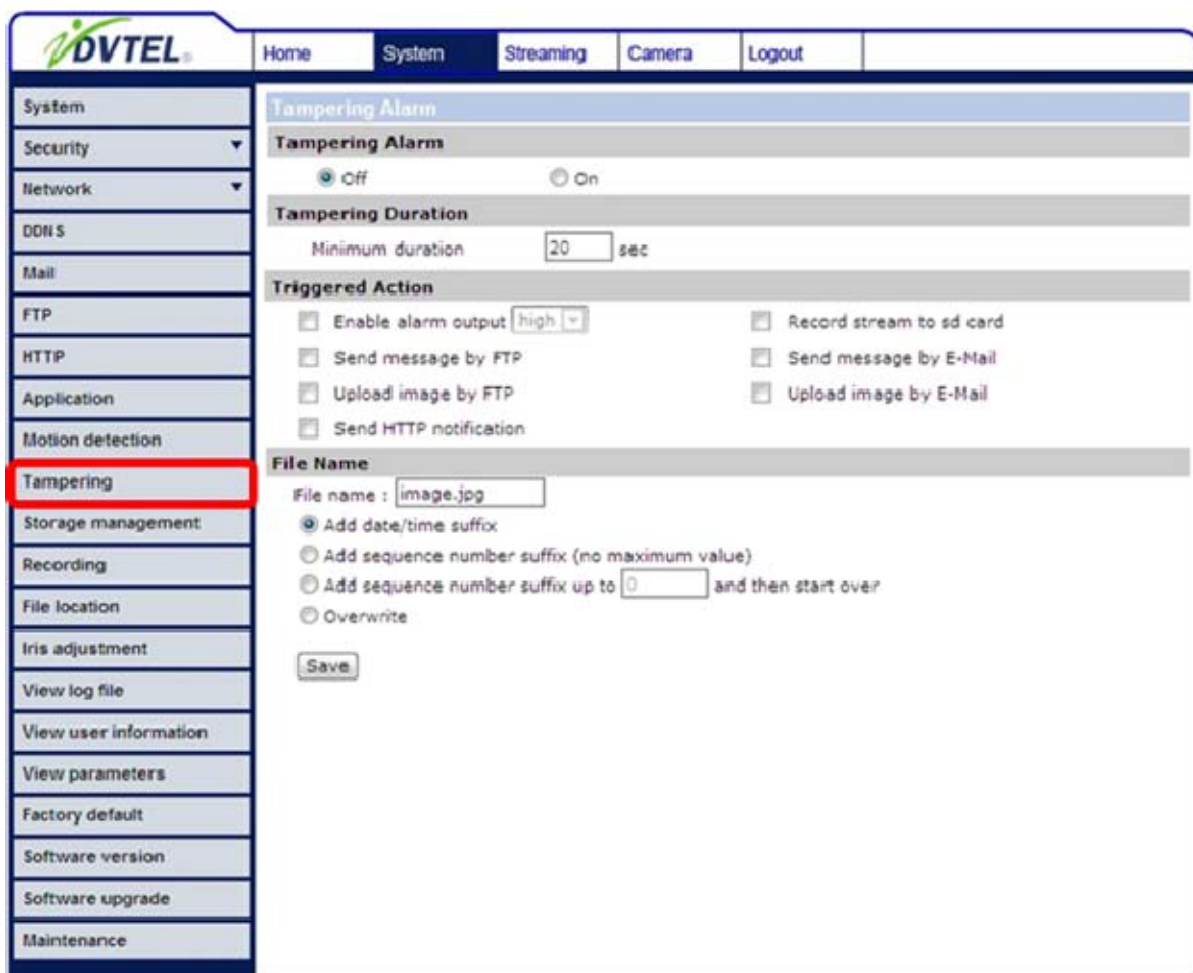

The screenshot displays the DVTel web interface for configuring the Tampering Alarm. The left sidebar contains a menu with the following items: System, Security, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, **Tampering** (highlighted in red), Storage management, Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'Tampering Alarm' and includes the following settings:

- Tampering Alarm:** A toggle switch set to 'Off'.
- Tampering Duration:** A text box showing '20' seconds.
- Triggered Action:** A list of checkboxes for actions to be triggered:
 - ☐ Enable alarm output (dropdown menu set to 'high')
 - ☐ Send message by FTP
 - ☐ Upload image by FTP
 - ☐ Send HTTP notification
 - ☐ Record stream to sd card
 - ☐ Send message by E-Mail
 - ☐ Upload image by E-Mail
- File Name:** A text box showing 'image.jpg' and a list of radio button options:
 - ☒ Add date/time suffix
 - ☐ Add sequence number suffix (no maximum value)
 - ☐ Add sequence number suffix up to [0] and then start over
 - ☐ Overwrite
- A 'Save' button is located at the bottom of the configuration area.

Detection of camera tampering is achieved by measuring the differences between the older frames of video (which are stored in buffers) and more recent frames.

Tampering Alarm

You will be able to turn on/off Tampering Alarm function in Tampering Alarm setting page. The default setting is Off.

Tampering Duration

Minimum Tampering Duration is the time for video analysis to determine whether camera tampering has occurred. Minimum Duration could also be interpreted as defining the Tampering threshold; longer duration represents higher threshold. Settable Tampering Duration time range is from 10 to 3600 seconds.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when tampering is detected. All options are listed as follows:

- **Enable Alarm Output**
Check the item and select the predefined type of alarm output to enable alarm relay output when tampering is detected.
- **Record stream to SD Card**
Select this item, and the Tampering Alarm recording will be stored in Micro SD/ SDHC card when tampering is detected.




NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. See section [Recording](#) for further details.

- **Send Alarm Message by FTP/E-Mail**
The Administrator can select whether to send an alarm message by FTP and/or E-Mail when tampering is detected.
- **Upload Image by FTP**
Select this item, and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When tampering is detected, event images will be uploaded to the appointed FTP site.

☒	Upload Image by FTP
FTP address	FTP1 ▼
Pre-trigger buffer	5 frames ▼
Post-trigger buffer	5 frames ▼
☐	Continue image upload
☒	Upload for 1 sec
☐	Upload during the trigger active
Image frequency	Max. ▼ fps

- **Upload Image by E-Mail**


Select this item, and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When tampering is detected, event images will be sent to the appointed e-mail address.

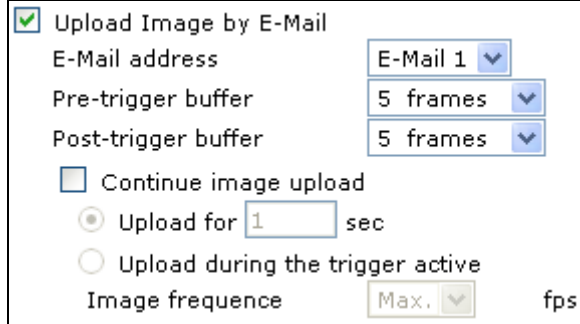


NOTE: Make sure SMTP or FTP configuration has been completed. See section [Mail](#) and [FTP](#) for further details.

- **Send HTTP notification**

Check this item, select the destination HTTP address, and specify the parameters for HTTP notifications. When the Tampering Alarm is triggered, the HTTP notifications can be sent to the specified HTTP server.



File Name

The uploaded image's filename format can be set in this section. Please select the one that meets your requirements.

Save

Click the **Save** button to save all the Tampering Alarm settings mentioned above.


6.3.11 Storage Management

Users can implement local recording to the Micro SD/SDHC card up to 32GB. This page shows the capacity information of the Micro SD card and a recording list with all the recording files saved on the memory card. Users can also format the SD card and implement automatic recording cleanup through the setting page.

To implement Micro SD card recording, please go to the "Recording" page (see [Recording](#)) for activation.



NOTE: Please format the Micro SD/SDHC card when using for the first time. Formatting will also be required when a memory card already being used on one camera and later transferred to another camera with different software platform.

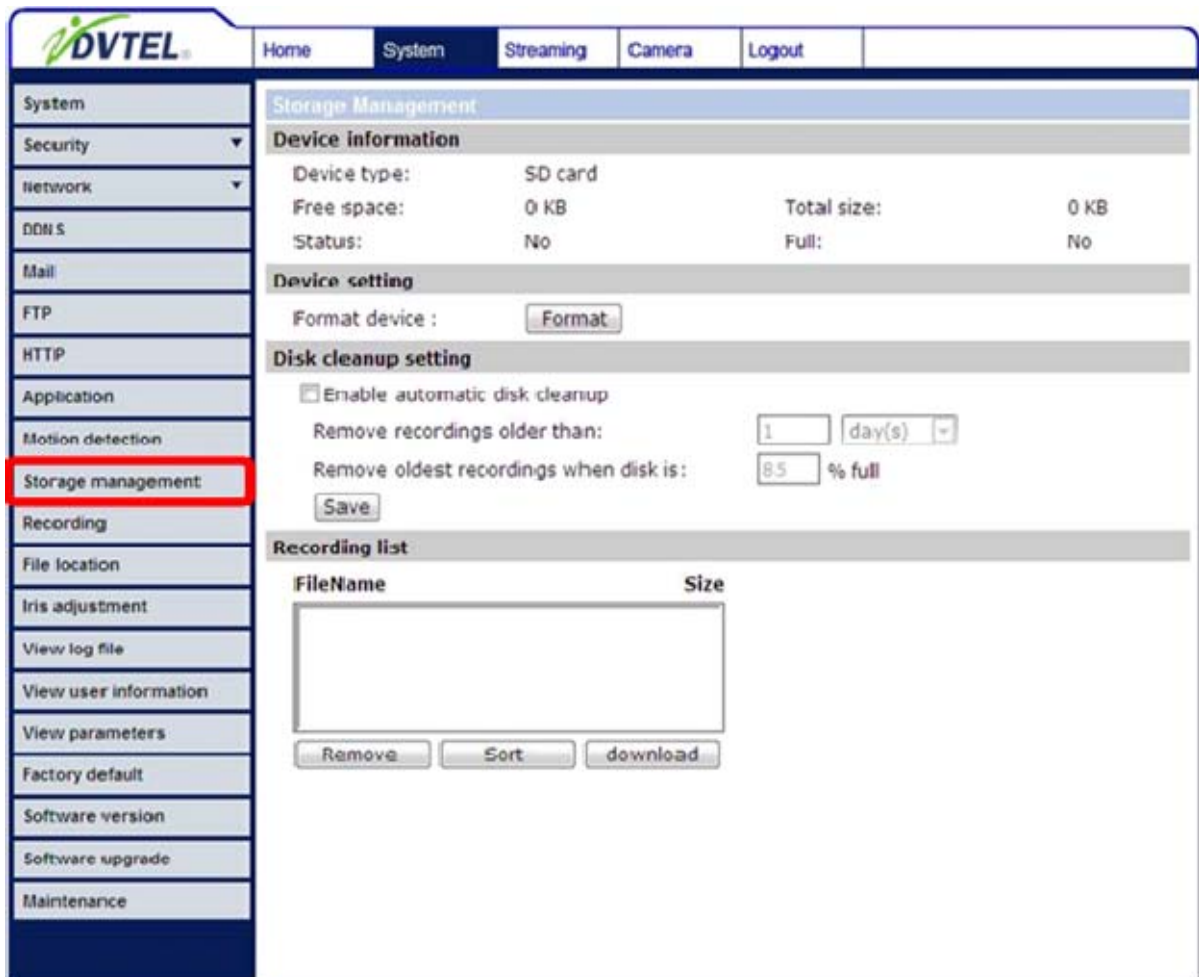

The screenshot displays the DVTel web interface. The left sidebar contains a menu with items like System, Security, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, **Storage management** (highlighted with a red box), Recording, File location, Iris adjustment, View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area is titled 'Storage Management' and includes sections for 'Device information', 'Device setting', 'Disk cleanup setting', and 'Recording list'. The 'Device information' section shows details for an SD card, including free space, total size, status, and full status. The 'Device setting' section has a 'Format device' button. The 'Disk cleanup setting' section includes checkboxes for enabling automatic disk cleanup and settings for removing old recordings. The 'Recording list' section is a table with columns for 'FileName' and 'Size', and buttons for 'Remove', 'Sort', and 'download'.

Device information

When users insert the Micro SD/SDHC card, the card information such as the memory capacity and status will be shown at Device Information section.

For the memory card being successfully installed, its status shall be shown at "Device information" section in the Storage Management page.

Device setting

Press the “**Format**” button to format the memory card.


Disk cleanup setting

Users can enable automatic recordings cleanup by specifying the time and storage limits

Recording List

Each video file on the Micro SD/SDHC card will be listed in the Recording list as shown below. The maximum file size is 60 MB (60 MB per file).

When the recording mode is set as “Always” (consecutive recording) and the Micro SD/ SDHC card recording is also allowed to be enabled by events triggered, once events occur, the system will immediately implement events recording to the memory card. Then the IP Camera will return to the regular recording mode after events recording.

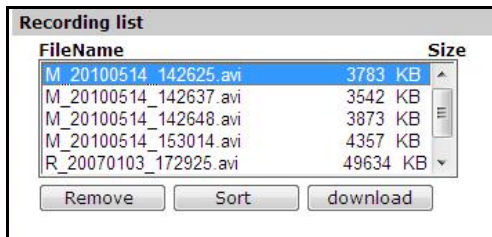

The screenshot shows a window titled "Recording list" with a table of files. The first row is selected. Below the table are three buttons: "Remove", "Sort", and "download".

FileName	Size
M_20100514_142625.avi	3783 KB
M_20100514_142637.avi	3542 KB
M_20100514_142648.avi	3873 KB
M_20100514_153014.avi	4357 KB
R_20070103_172925.avi	49634 KB

- **Remove**
To remove a file, select the file first, and then press the “**Remove**” button.
- **Sort**
Press the “Sort” button, and the files in the Recording list will be listed in name and date order.



NOTE: The capital letter A/M/R appears in the very beginning of name denotes the sort of the recording: A stands for Alarm; M stands for Motion; R stands for regular recording.


- **Download**

To open/download a video clip, select the file first, and then press the “**Download**” button below the Recording list field. The selected file window will pop up as shown below. Click on the AVI file to directly play the video in the player or download it to a specified location.



6.3.12 Recording

In the Recording setting page, users can specify the recording schedule that fits the present surveillance requirement.

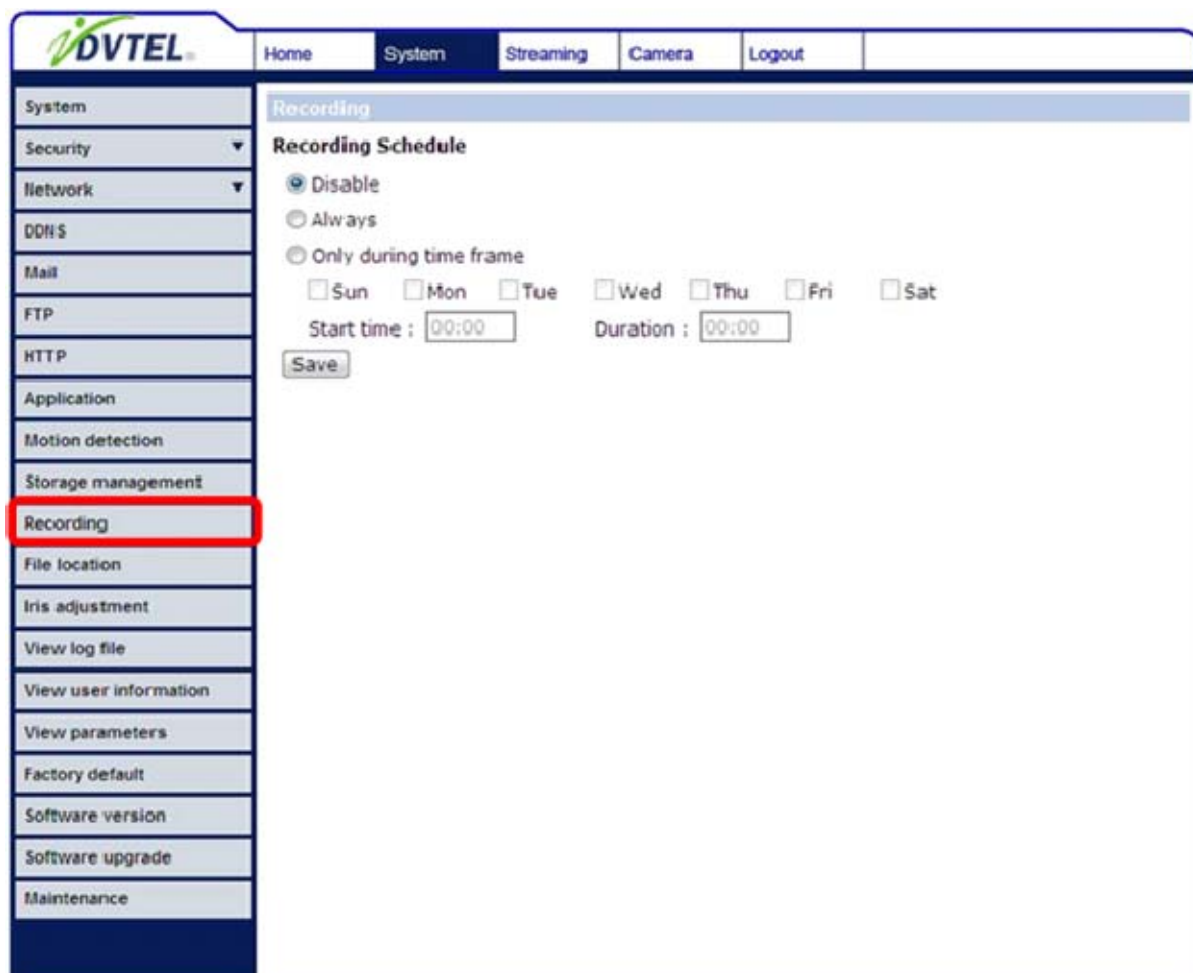

The screenshot displays the DVTel web interface. On the left is a vertical menu with various system settings. The 'Recording' option is highlighted with a red rectangular box. The main content area is titled 'Recording' and contains a 'Recording Schedule' section. This section includes three radio button options: 'Disable' (selected), 'Always', and 'Only during time frame'. Below the 'Only during time frame' option are seven checkboxes for the days of the week: Sun, Mon, Tue, Wed, Thu, Fri, and Sat. Further down are two input fields labeled 'Start time' and 'Duration', both showing '00:00'. A 'Save' button is located at the bottom of the configuration area.

Activating Micro SD / SDHC Card Recording

Two types of schedule mode are offered: Always and Time Frame setting. Users can setup the time frame to fit the recording schedule or choose "Always" to activate Micro SD/SDHC Card Recording all the time.

Please click on the "Save" button for confirming the schedule mode.

Terminating Micro SD / SDHC Card Recording


Select "Disable" to terminate the recording function.

6.3.13 File Location

Users can specify a storage location for the snapshots and web recording. The default setting is: C:\. Once confirm the setting, press "Save," and all the snapshots and recording will be saved in the designate location.




NOTE: Please make sure the selected file path contains valid characters such as letters and numbers.

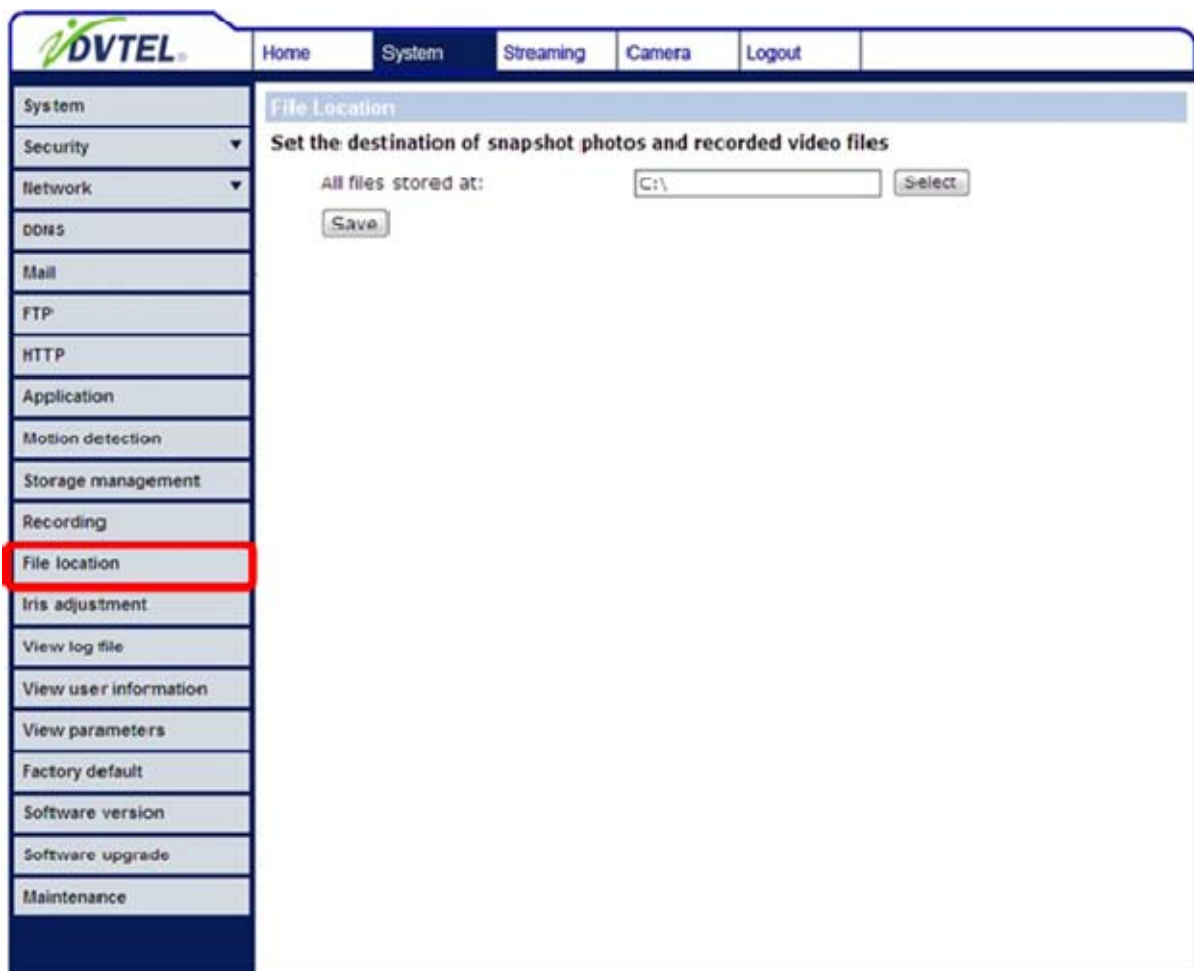

The screenshot displays the DVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. A left-hand menu lists various system settings, with 'File location' highlighted by a red rectangle. The main content area is titled 'File Location' and contains the instruction 'Set the destination of snapshot photos and recorded video files'. Below this, there is a label 'All files stored at:' followed by a text input field containing 'C:\' and a 'Select' button. A 'Save' button is positioned below the input field.

6.3.14 Iris Adjustment


For users who use Auto-iris lens, when it is required to implement iris adjustment, please refer to the Iris adjustment procedure in the setting page to adjust iris.

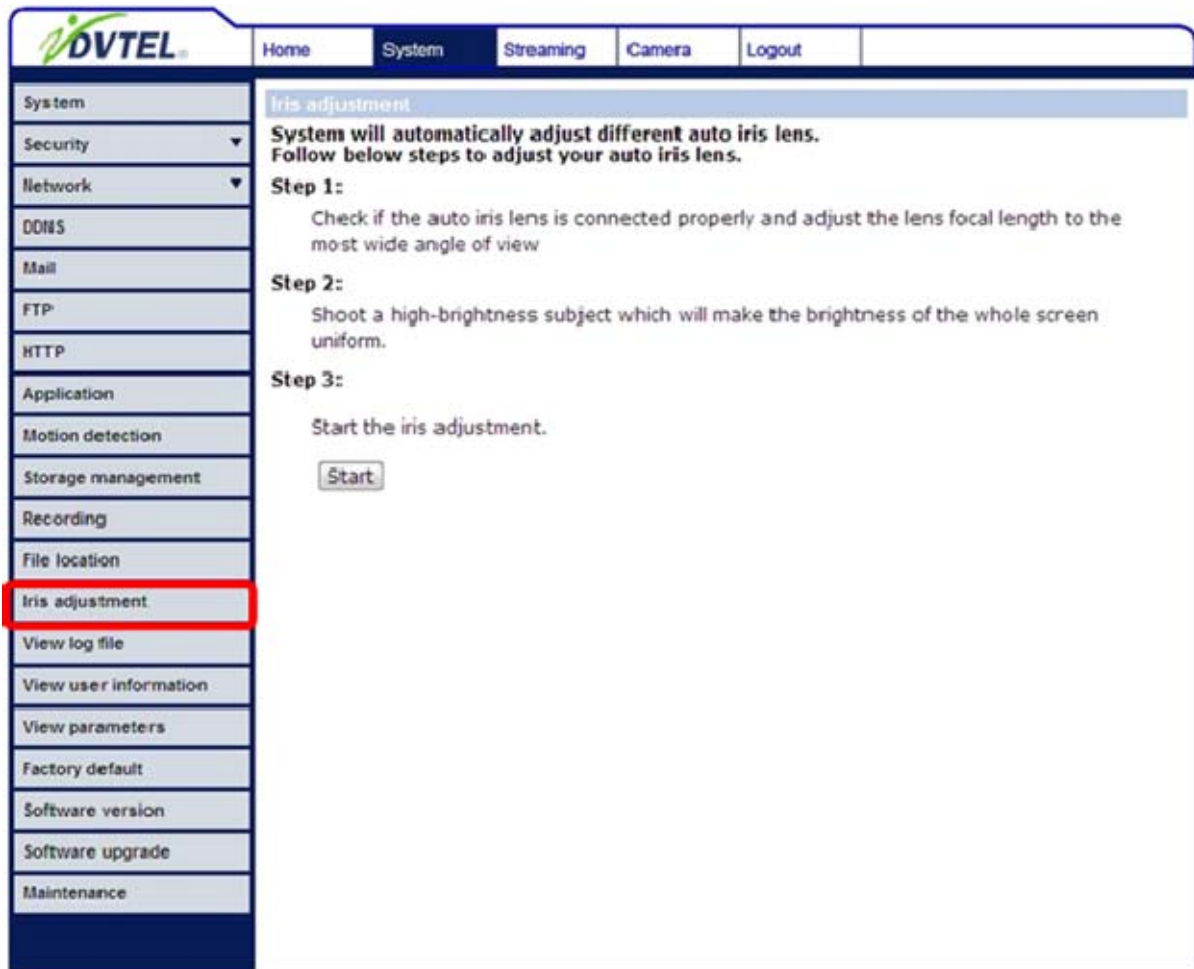

The screenshot displays the DVTel web interface. On the left is a vertical navigation menu with the following items: System, Security, Network, DDNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment (highlighted with a red rectangle), View log file, View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The main content area is titled 'Iris adjustment' and contains the following text: 'System will automatically adjust different auto iris lens. Follow below steps to adjust your auto iris lens.' It then lists three steps: Step 1: 'Check if the auto iris lens is connected properly and adjust the lens focal length to the most wide angle of view'; Step 2: 'Shoot a high-brightness subject which will make the brightness of the whole screen uniform.'; and Step 3: 'Start the iris adjustment.' Below Step 3 is a 'Start' button.

6.3.15 View Log File

Click on the link to view the system log file. The content of the file provides useful information about configuration and connections after system boot-up.

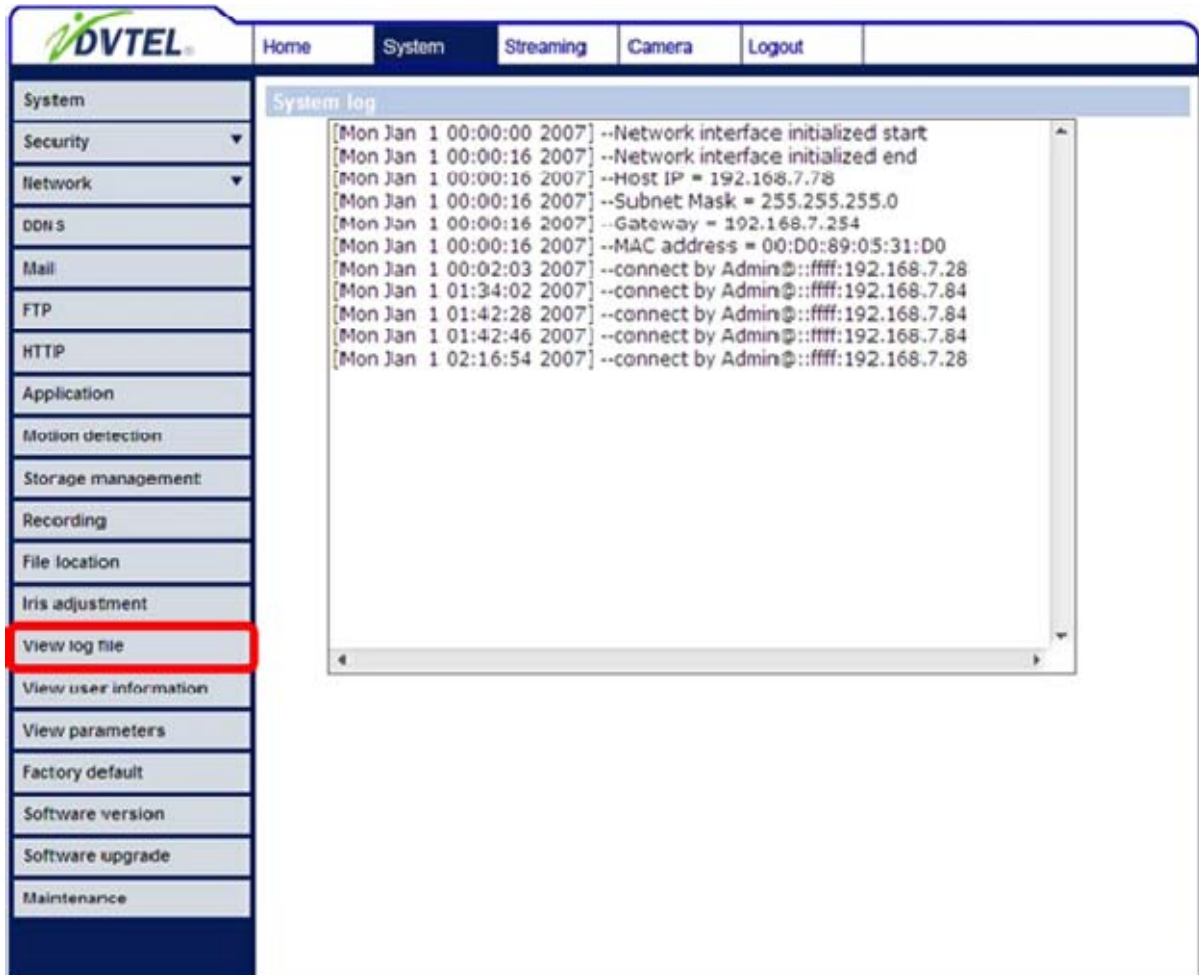

The screenshot displays the DVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. On the left, a vertical menu lists various system settings: System, Security, Network, DNS, Mail, FTP, HTTP, Application, Motion detection, Storage management, Recording, File location, Iris adjustment, View log file (highlighted with a red rectangle), View user information, View parameters, Factory default, Software version, Software upgrade, and Maintenance. The main content area, titled 'System log', shows a list of system events with timestamps and descriptions:

```
[Mon Jan 1 00:00:00 2007] --Network interface initialized start
[Mon Jan 1 00:00:16 2007] --Network interface initialized end
[Mon Jan 1 00:00:16 2007] --Host IP = 192.168.7.78
[Mon Jan 1 00:00:16 2007] --Subnet Mask = 255.255.255.0
[Mon Jan 1 00:00:16 2007] --Gateway = 192.168.7.254
[Mon Jan 1 00:00:16 2007] --MAC address = 00:D0:89:05:31:D0
[Mon Jan 1 00:02:03 2007] --connect by Admin@::ffff:192.168.7.28
[Mon Jan 1 01:34:02 2007] --connect by Admin@::ffff:192.168.7.84
[Mon Jan 1 01:42:28 2007] --connect by Admin@::ffff:192.168.7.84
[Mon Jan 1 01:42:46 2007] --connect by Admin@::ffff:192.168.7.84
[Mon Jan 1 02:16:54 2007] --connect by Admin@::ffff:192.168.7.28
```

6.3.16 View User Information


The Administrator can view each added user's login information and privileges (see [Security](#)).

View User Login Information

All the users in the network will be listed in the "User information" zone, as shown below. As the figure below shows:


User: 4321

It indicates that one user's login username is: User, and the password is: 4321.

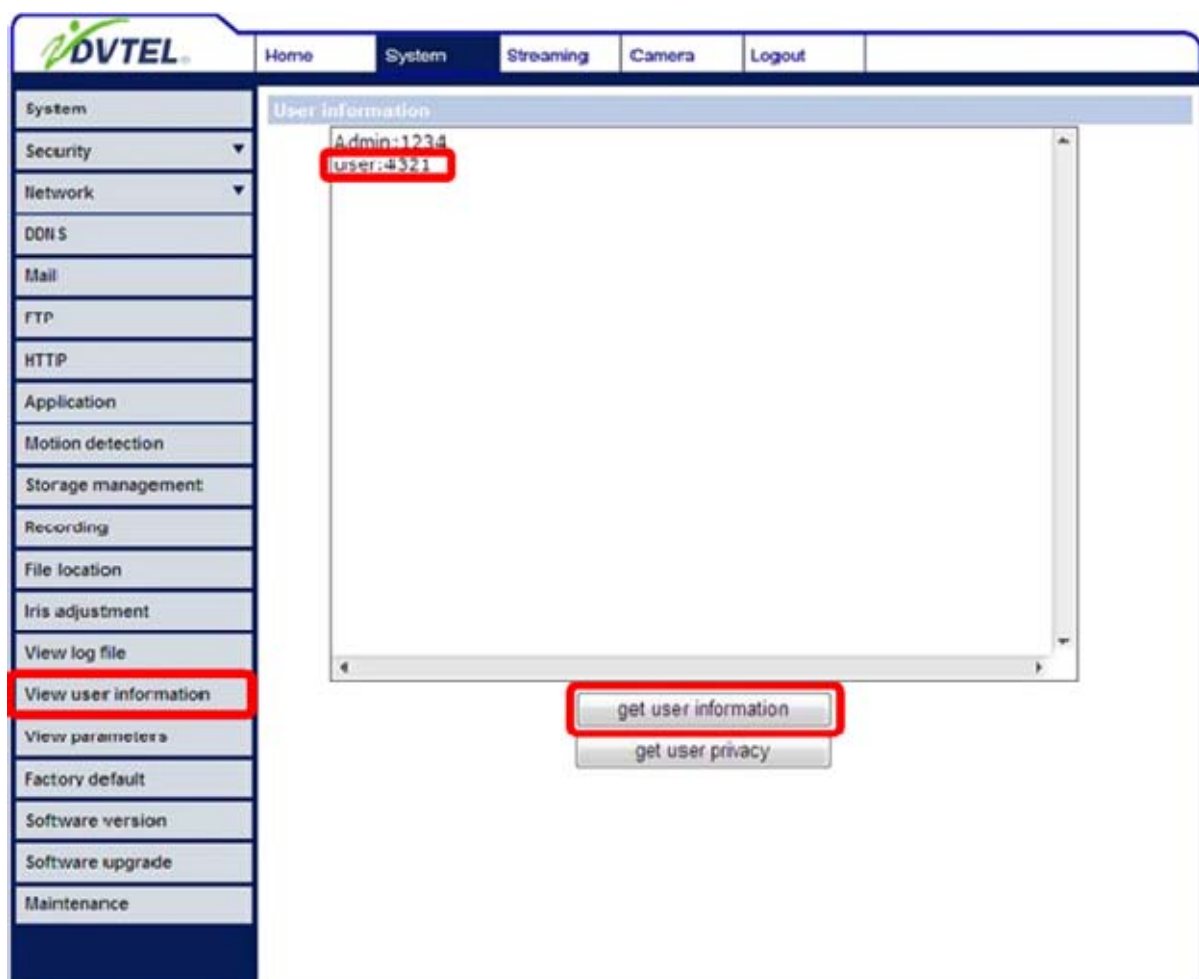

View User Privilege

Press “Get user privacy” down the page, and the Administrator can view each user’s privileges.

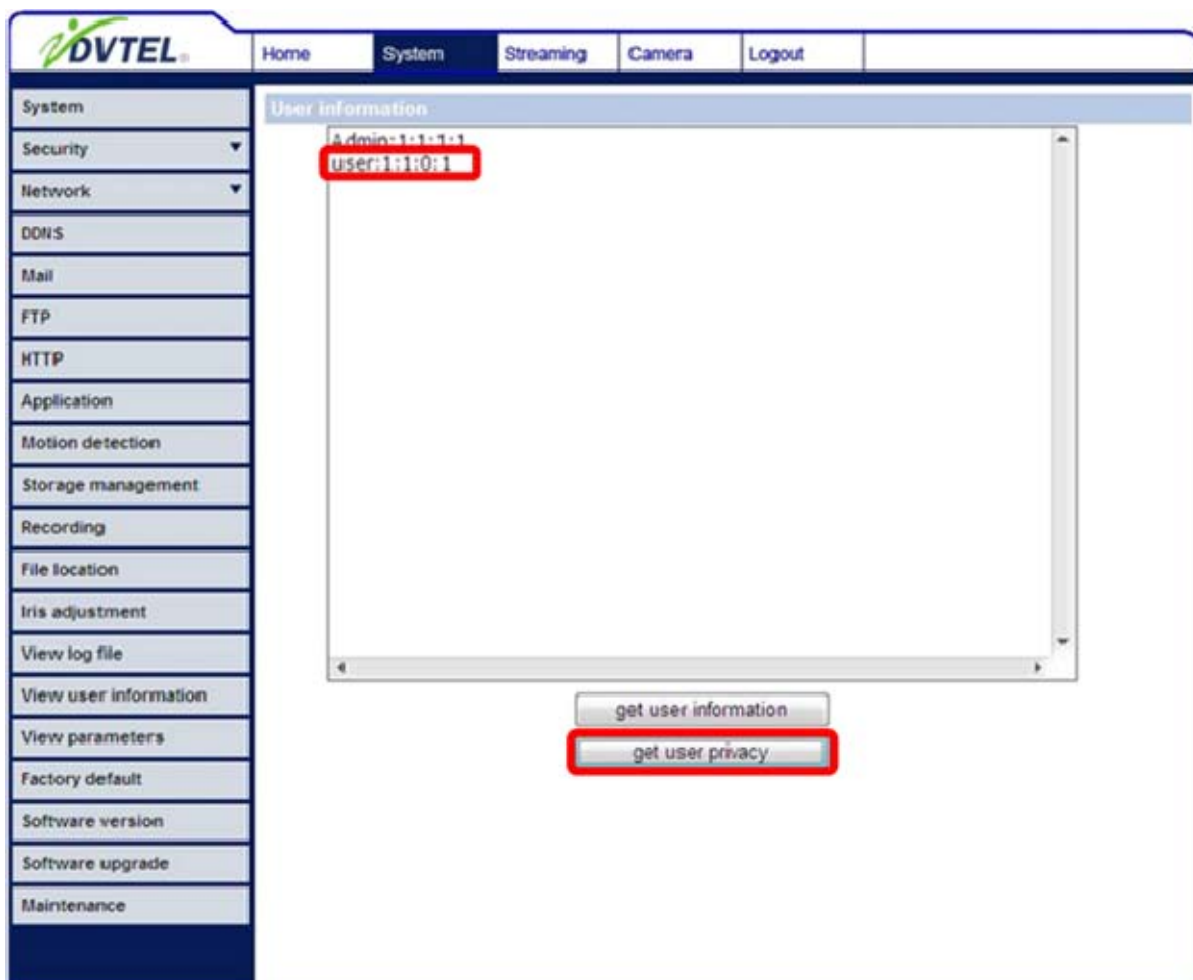

As the figure above shows:

User: 1:1:0:1


1:1:0:1= I/O access : Camera control : Talk : Listen (see [Security](#))

☒ I/O access	☒ Camera control
☐ Talk	☒ Listen

Therefore, it denotes the user is granted privileges of I/O access, Camera control and Listen.

6.3.17 View Parameters

Click on this item to view the entire system's parameter setting.

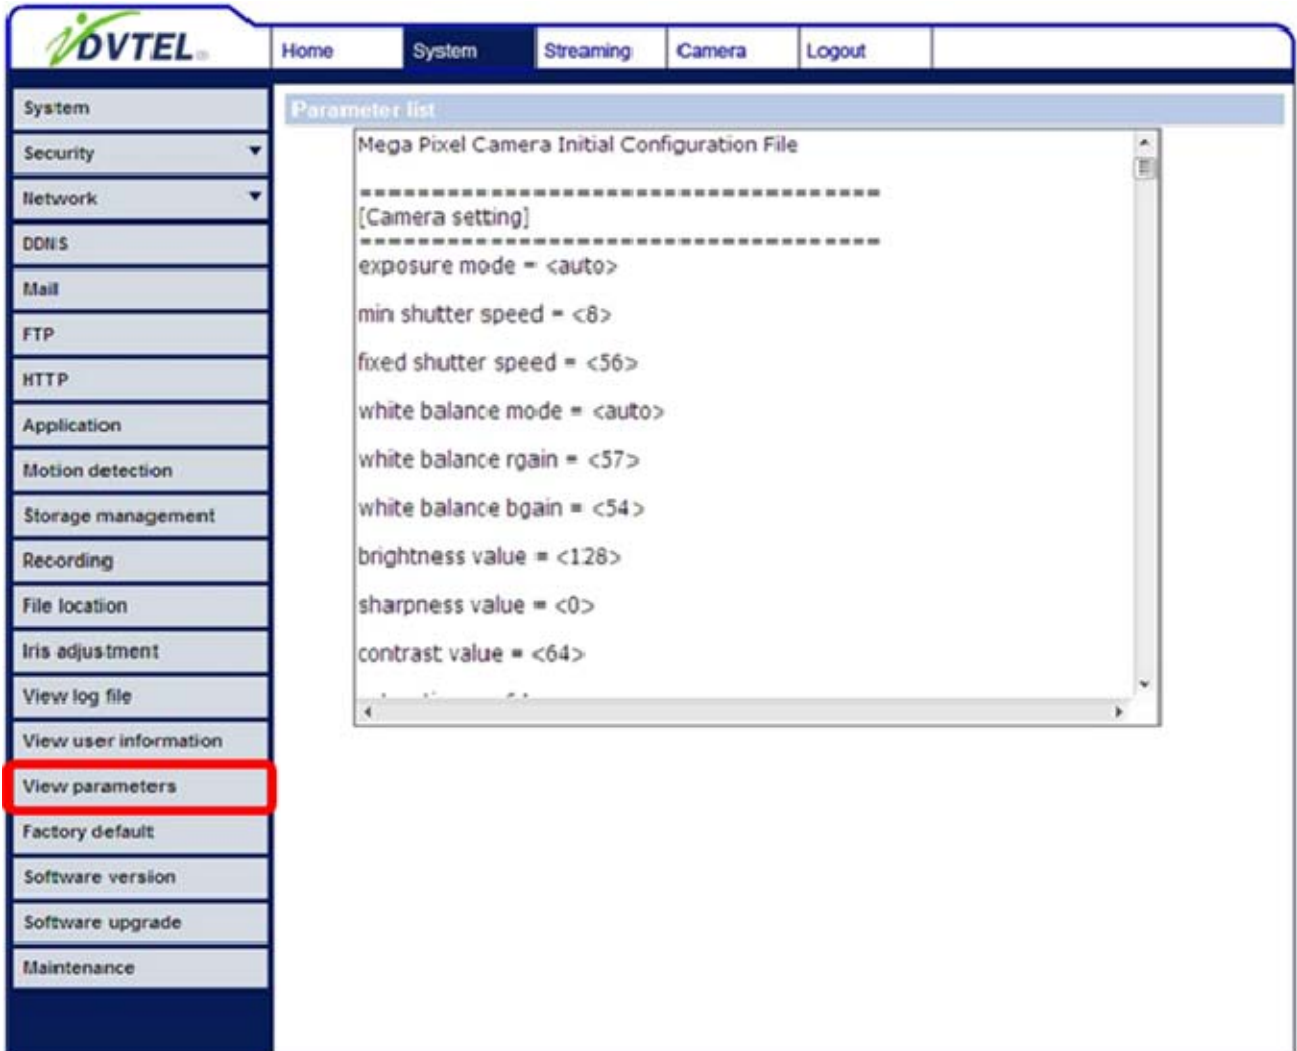


The screenshot shows the DVTEL web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a list of system management options, with 'View parameters' highlighted by a red rectangle. The main content area, titled 'Parameter list', displays the 'Mega Pixel Camera Initial Configuration File' settings. The settings are as follows:

```
=====
[Camera setting]
=====
exposure mode = <auto>
mini shutter speed = <8>
fixed shutter speed = <56>
white balance mode = <auto>
white balance rgain = <57>
white balance bgain = <54>
brightness value = <128>
sharpness value = <0>
contrast value = <64>
```

6.3.18 Factory Default

The factory default setting page is shown as below. Follow the instructions to reset the IP Camera to factory default setting if needed.

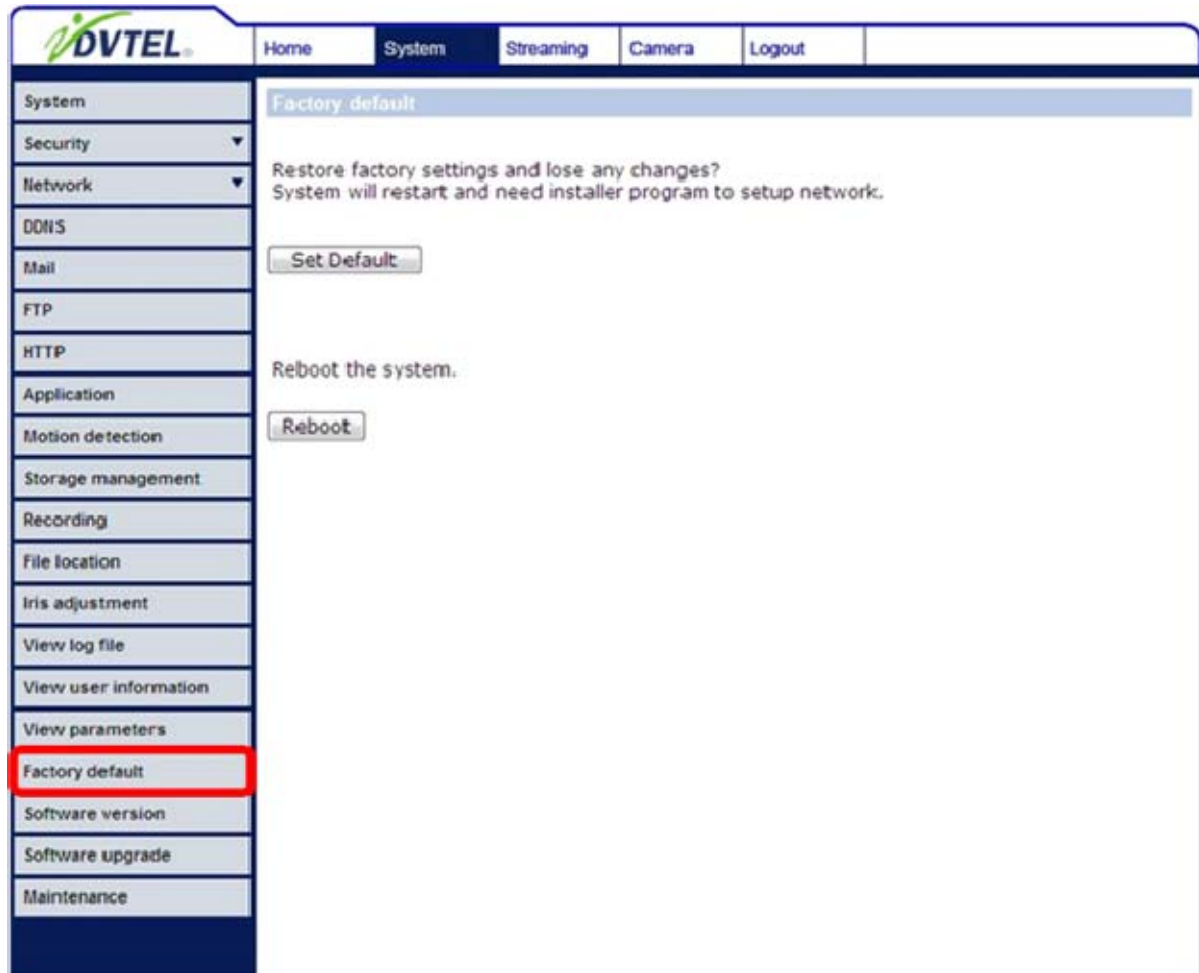

Set Default

Click on the "**Set Default**" button to recall the factory default settings. Then the system will restart in 30 seconds.




NOTE: The IP address will be restored to default.

Reboot

Click on the "**Reboot**" button, and the system will restart without changing current settings.


6.3.19 Software Version

The current software version is displayed in the software version page, which is shown as the figure below.

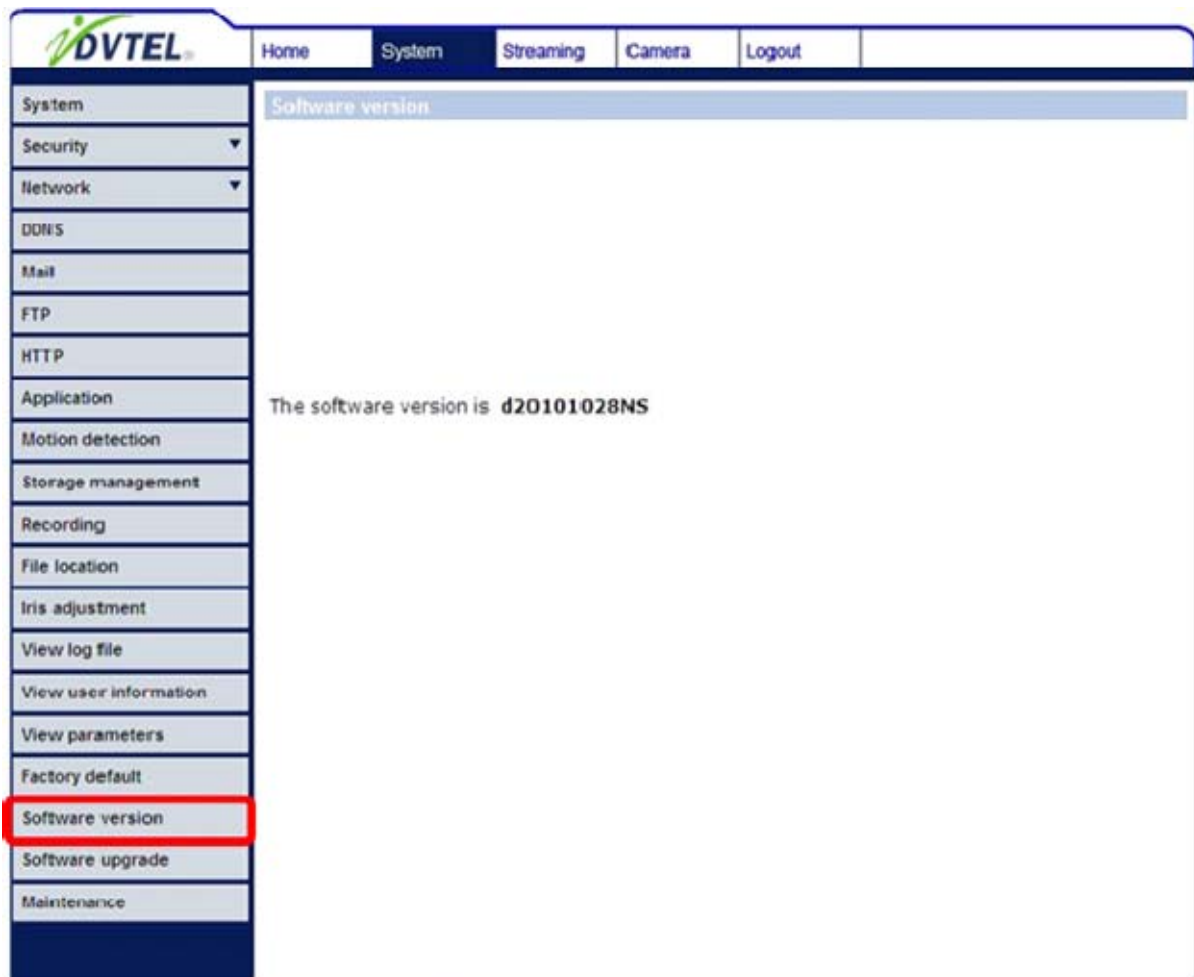

6.3.20 Software Upgrade

Software upgrade can be carried out in the "Software Upgrade" page, as shown below.

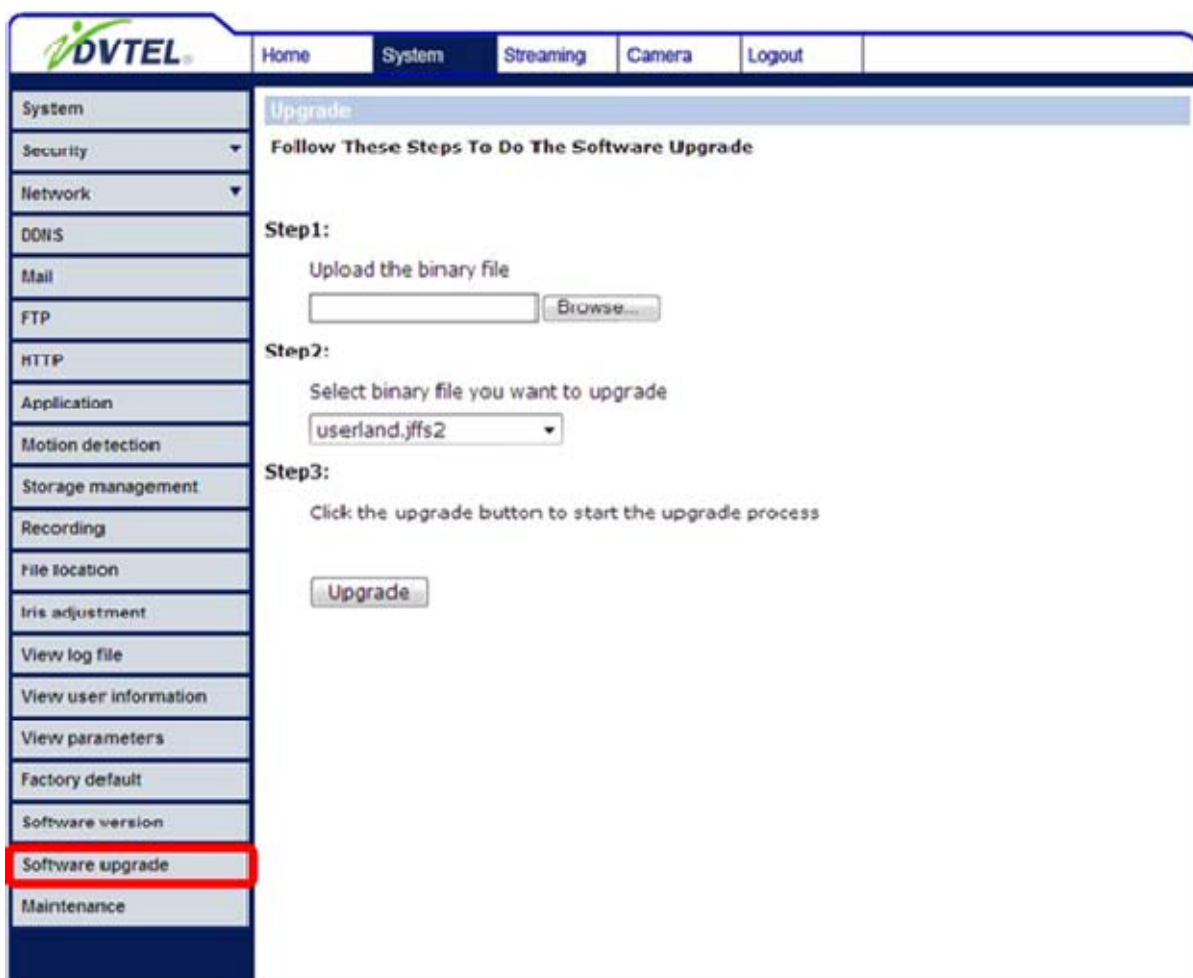

The screenshot displays the DVTel web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar lists various system settings, with 'Software upgrade' highlighted in red. The main content area is titled 'Upgrade' and provides instructions for performing a software upgrade. It includes three steps: Step 1 (Upload the binary file), Step 2 (Select binary file you want to upgrade), and Step 3 (Click the upgrade button to start the upgrade process).

Upgrade

Follow These Steps To Do The Software Upgrade

Step1:

Upload the binary file

Step2:

Select binary file you want to upgrade

Step3:

Click the upgrade button to start the upgrade process




NOTE: Make sure the upgrade software file is available before carrying out software upgrade.

The procedure of software upgrade is like the following:

To upgrade the firmware

- 1.) Click "**Browse**" and select the binary file to be uploaded, ex. Userland.IMG.

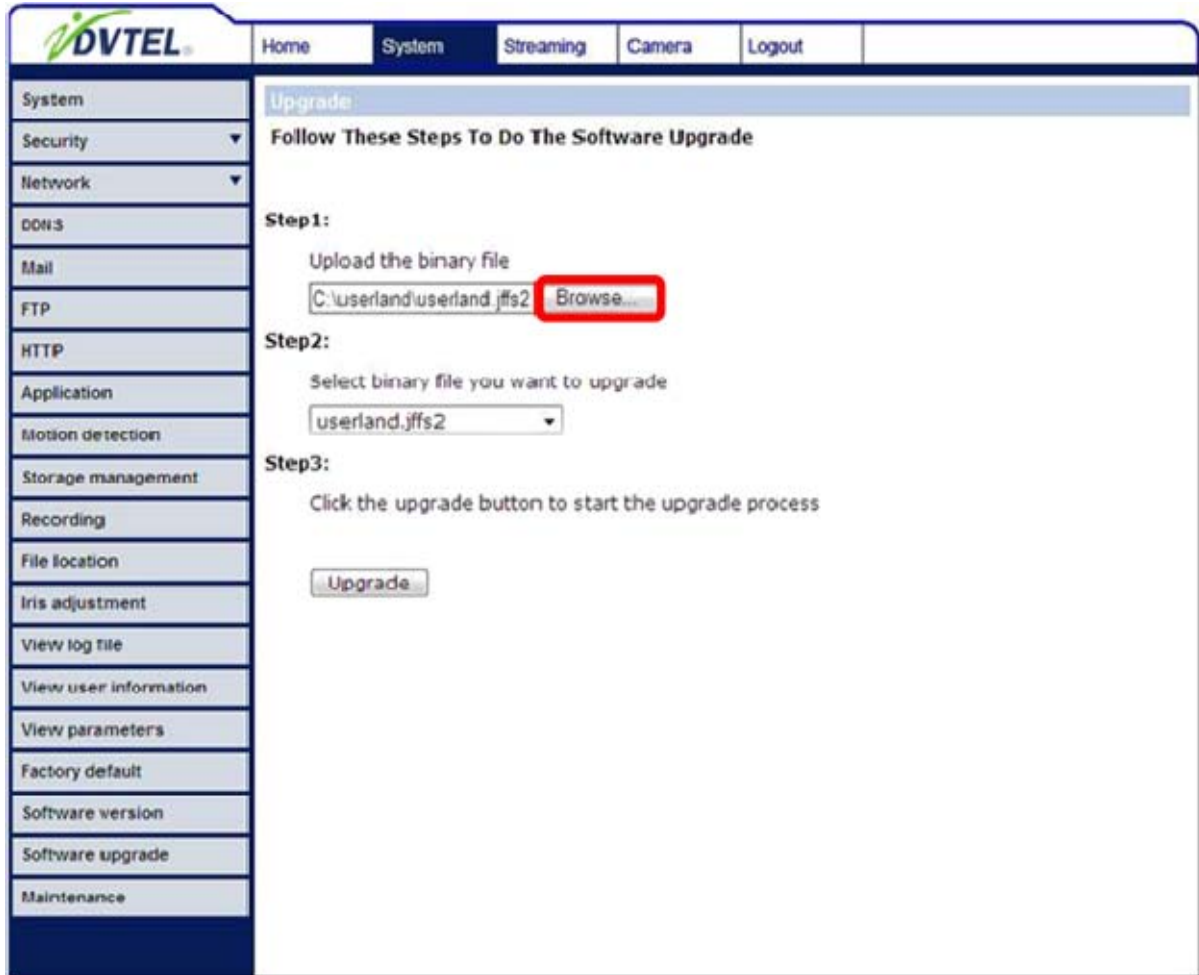


The screenshot shows the DVTel web interface with the 'System' menu selected. The 'Upgrade' section is active, displaying the following steps:

- Step1:** Upload the binary file. The text input field contains 'C:\userland\userland_jffs2' and the 'Browse...' button is highlighted with a red rectangle.
- Step2:** Select binary file you want to upgrade. The dropdown menu shows 'userland.jffs2'.
- Step3:** Click the upgrade button to start the upgrade process. The 'Upgrade' button is visible at the bottom.



NOTE: Do not change the upgrade file name, or the system will fail to find the file.

- 2.) Pull down the upgrade binary file list and select the file you want to upgrade; in this case, select "Userland.IMG."
- 3.) Press "**Upgrade**". The system will first check whether the upgrade file exists or not, and then begin to upload the upgrade file. Subsequently, the upgrade status bar will display on the page. When it runs to 100%, the upgrade process is finished.

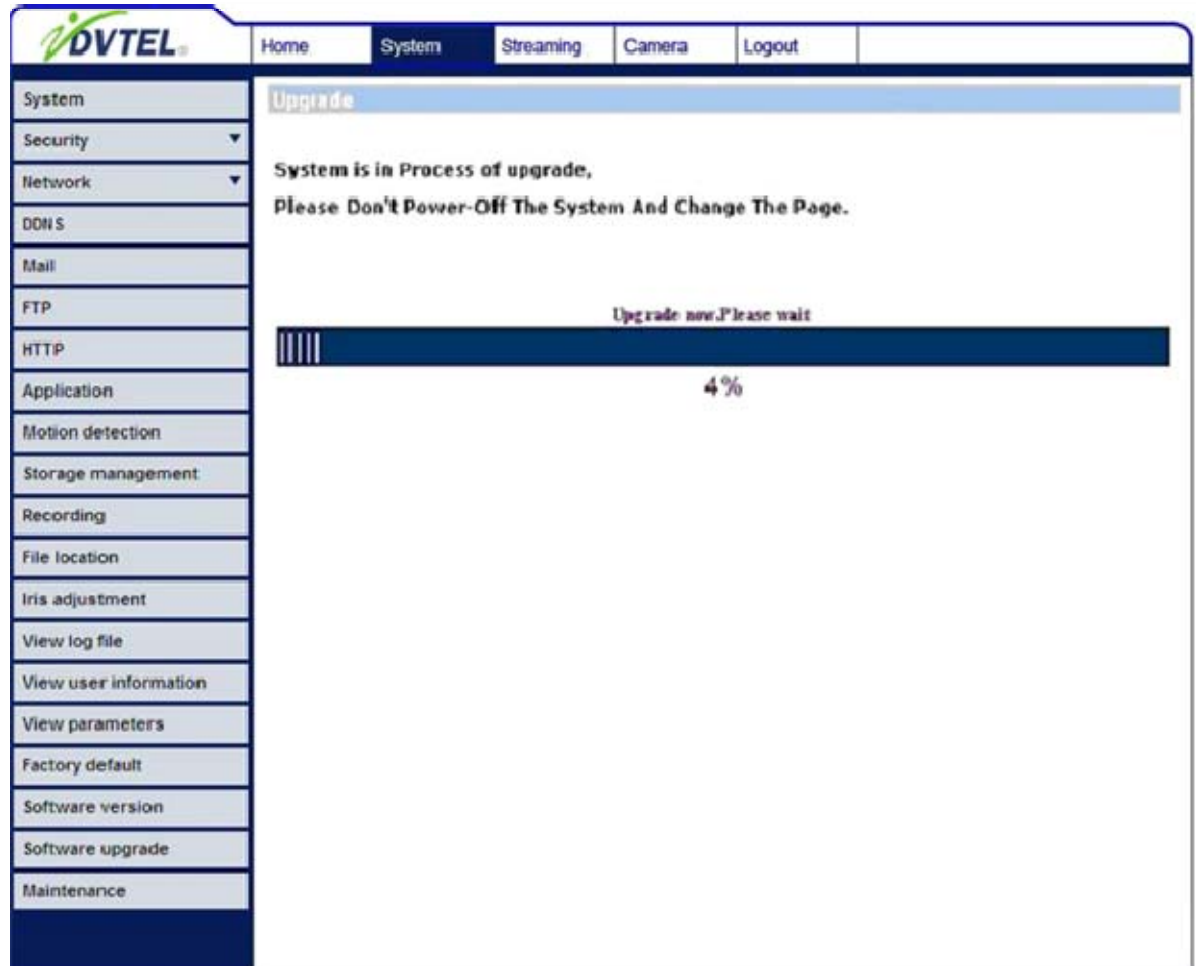


After the upgrade process is finished, the viewer will return to Home page.

- 4.) Close the video browser.
- 5.) Click "**Control Panel**", and then double click "Add or Remove Programs." In the "Currently install programs" list, select "**DCViewer**" and click the button "**Remove**" to uninstall the existing DC Viewer.
- 6.) Open a new web browser, re-login the IP Camera, and then allow the automatic download of DVTel Web Player (aka. DV Viewer).


6.3.21 Maintenance

Users can export configuration files to a specified location and retrieve data by uploading an existing configuration file to the IP Camera.

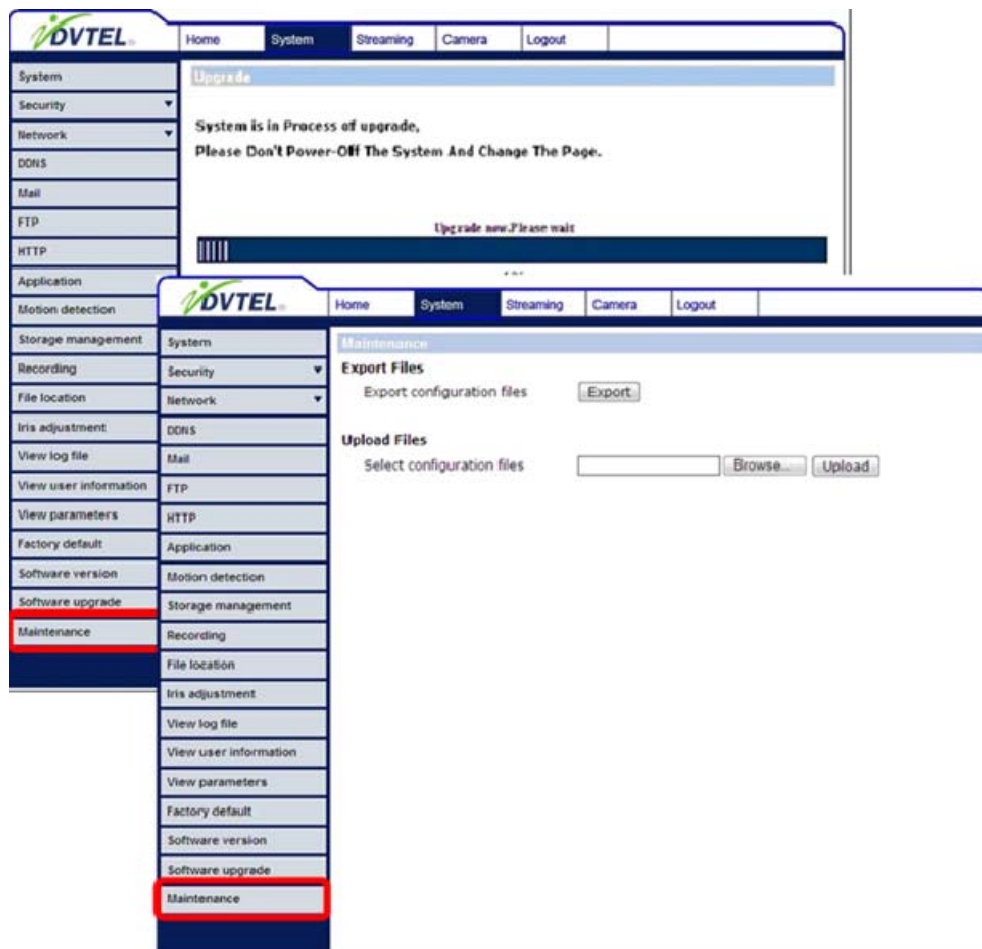

Export

Users can save the system settings by exporting the configuration file (.bin) to a specified location for future use. Press the **"Export"** button, and the popup File Download window will come out as shown below. Click **"Save"** and specify a desired location for saving the configuration file.

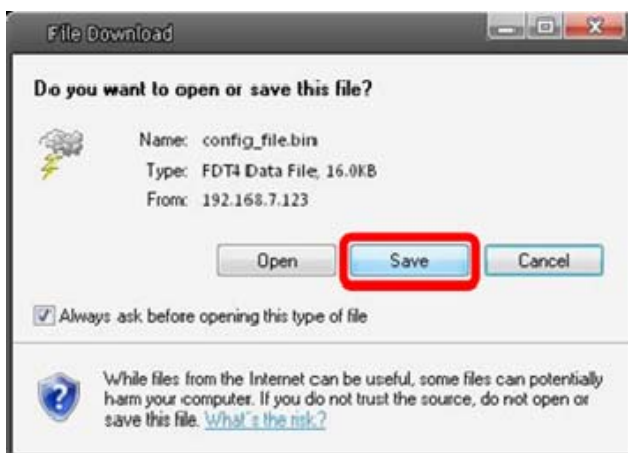

Upload

To copy an existing configuration file to the IP Camera, please first click on **"Browse"** to select the configuration file, and then press the **"Upload"** button for uploading.

6.4 Video and Audio Streaming Settings

Press the tab **"Streaming"** in the top of the page, and the configurable video and audio items will display in the left column. In Streaming, the Administrator can configure specific video resolution, video compression mode, video protocol, audio transmission mode, etc. Further details of these settings will be specified in the following sections.

Related Links

[Video Resolution and Rotate Type](#)

[Video Compression](#)


[Video OCX Protocol](#)

[Video Frame Rate](#)

[Audio Mode and Bit Rate Settings](#)

6.4.1 Video Resolution and Rotate Type

The video setting page is shown below:

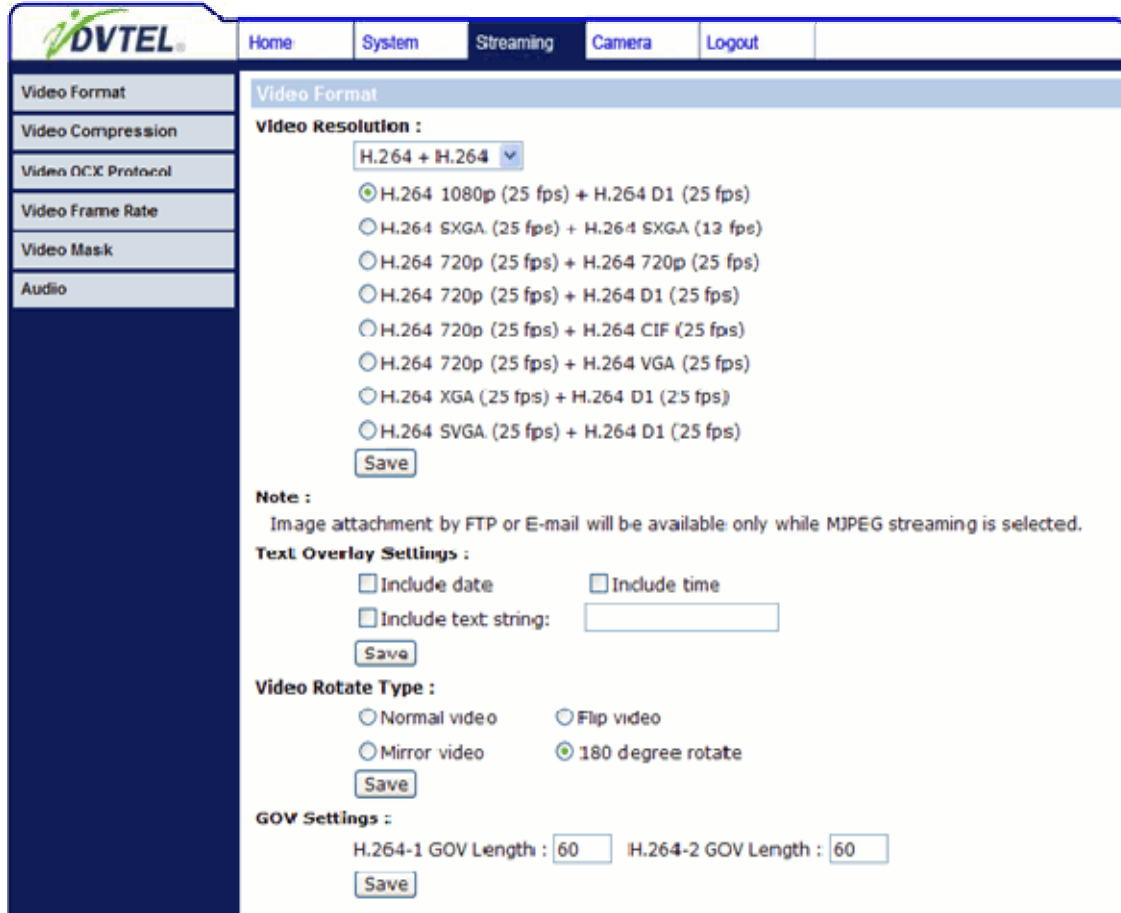


The screenshot shows the DVTel web interface with the 'Camera' tab selected. The left sidebar contains a menu with options: Video Format, Video Compression, Video OCX Protocol, Video Frame Rate, Video Mask, and Audio. The main content area is titled 'Video Format' and contains the following sections:

- Video Resolution :** A dropdown menu is set to 'H.264 + H.264'. Below it are eight radio button options:
 - ☒ H.264 1080p (25 fps) + H.264 D1 (25 fps)
 - ☐ H.264 SXGA (25 fps) + H.264 SXGA (13 fps)
 - ☐ H.264 720p (25 fps) + H.264 720p (25 fps)
 - ☐ H.264 720p (25 fps) + H.264 D1 (25 fps)
 - ☐ H.264 720p (25 fps) + H.264 CIF (25 fps)
 - ☐ H.264 720p (25 fps) + H.264 VGA (25 fps)
 - ☐ H.264 XGA (25 fps) + H.264 D1 (25 fps)
 - ☐ H.264 SVGA (25 fps) + H.264 D1 (25 fps)
 A 'Save' button is located below these options.
- Note :** Image attachment by FTP or E-mail will be available only while MJPEG streaming is selected.
- Text Overlay Settings :**
 - ☐ Include date
 - ☐ Include time
 - ☐ Include text string:
 A 'Save' button is located below these options.
- Video Rotate Type :**
 - ☐ Normal video
 - ☐ Flip video
 - ☐ Mirror video
 - ☒ 180 degree rotate
 A 'Save' button is located below these options.
- GOV Settings :**
 - H.264-1 GOV Length :
 - H.264-2 GOV Length :
 A 'Save' button is located below these options.

H.264 + H.264 Video Resolution:

- H.264 1080p (25fps) + H.264 D1 (25 fps)
- H.264 SXGA (25fps) + H.264 SXGA (13 fps)
- H.624 720p (25 fps) + H.624 720p (25 fps)
- H.624 720p (25 fps) + H.624 D1 (25 fps)
- H.624 720p (25 fps) + H.624 CIF (25 fps)
- H.624 720p (25 fps) + H.624 VGA (25 fps)
- H.624 XGA (25 fps) + H.624 D1 (25 fps)
- H.624 SVGA (25 fps) + H.624 D1 (25 fps)

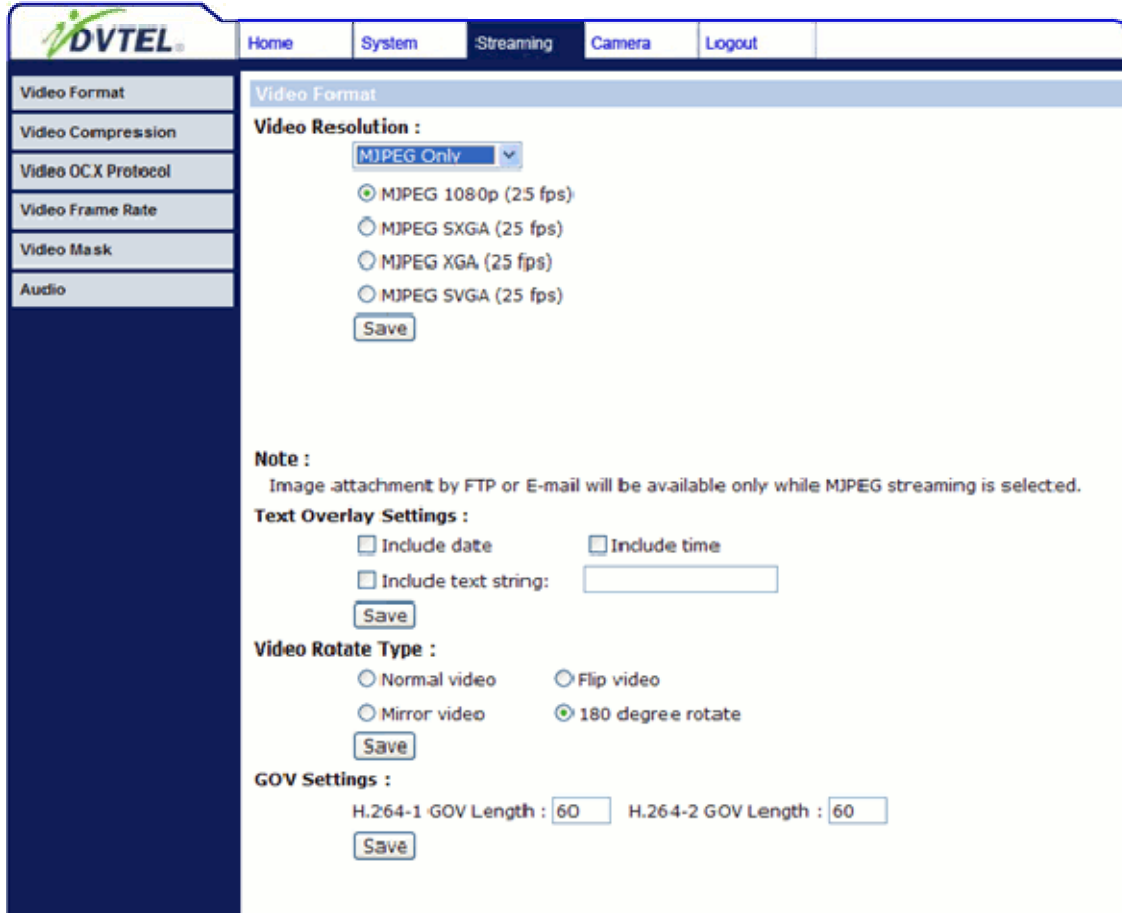

Video Format

Home System Streaming Camera Logout

Video Format

Video Resolution :

MJPEG Only

☒ MJPEG 1080p (25 fps)
☐ MJPEG SXGA (25 fps)
☐ MJPEG XGA (25 fps)
☐ MJPEG SVGA (25 fps)

Save

Note :
Image attachment by FTP or E-mail will be available only while MJPEG streaming is selected.

Text Overlay Settings :

☐ Include date ☐ Include time
☐ Include text string:
 Save

Video Rotate Type :

☐ Normal video ☐ Flip video
☐ Mirror video ☒ 180 degree rotate
 Save

GOV Settings :

H.264-1 GOV Length : H.264-2 GOV Length :

Save

MJPEG Only Video Resolution (not supported by Latitude):

- MJPEG 1080p (25fps)
- MJPEG SXGA (25fps)
- MJPEG XGA (25fps)
- MJPEG SVGA (25fps)

iDVTel

HomeSystemStreamingCameraLogout

VideoFormat

Video Compression

Video OCX Protocol

Video Frame Rate

Video Mask

Audio

Video Format

Video Resolution :

MPEG + H.264

☒ H.264 1080p (25 fps) + MJPEG D1 (25 fps)
 ☐ H.264 720p (25 fps) + MJPEG 720p (25 fps)
 ☐ H.264 720p (25 fps) + MJPEG D1 (25 fps)
 ☐ H.264 720p (25 fps) + MJPEG CIF (25 fps)
 ☐ H.264 720p (25 fps) + MJPEG VGA (25 fps)
 ☐ H.264 XGA (25 fps) + MJPEG D1 (25 fps)
 ☐ H.264 SVGA (25 fps) + MJPEG D1 (25 fps)

Save

Note :

Image attachment by FTP or E-mail will be available only while MJPEG streaming is selected.

Text Overlay Settings :

☐ Include date
 ☐ Include time
 ☐ Include text string:

Save

Video Rotate Type :

☐ Normal video
 ☐ Flip video
 ☐ Mirror video
 ☒ 180 degree rotate

Save

GOV Settings :

H.264-1 GOV Length : 60
 H.264-2 GOV Length : 60

Save

MJPEG + H.264 Video Resolution:

- MJPEG 1080p (25 fps) + MJPEG D1 (25 fps)
- H.624 720p (25 fps) + MJPEG 720p (25 fps)
- H.624 720p (25 fps) + MJPEG D1 (25 fps)
- H.624 720p (25 fps) + MJPEG CIF (25 fps)
- H.624 720p (25 fps) + MJPEG VGA (25 fps)
- H.624 XGA (25 fps) + MJPEG D1 (25 fps)
- H.624 SVGA (25 fps) + MJPEG D1 (25 fps)

Click "Save" to confirm the setting.

Text Overlay Settings

Users can select the items to display data including date/time/text on the live video pane. The maximum length of the string is 20 alphanumeric characters.

Click **"Save"** to confirm the Text Overlay setting.


Video Rotate Type

Users can change video display type if necessary. Selectable video rotate types include Normal, Flip, Mirror and 180 degree. Differences among these types are illustrated as below.

Suppose the displayed image of the IP Camera is shown as the figure below.



To rotate the image, users can select **"Flip"**, for instance. Then the displayed image will be reversed as shown below.

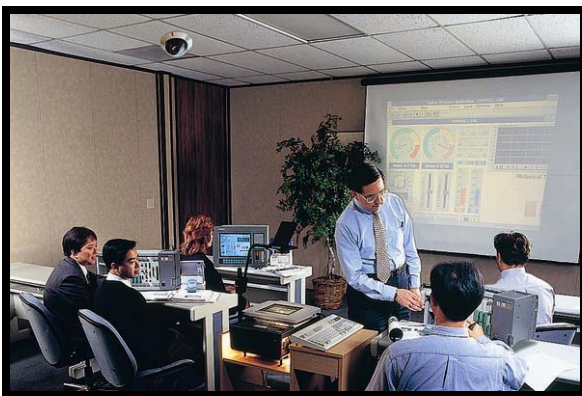

The following is descriptions for different video rotate type.

- **Flip**
If select <**Flip**>, the image will be rotated vertically.
- **Mirror**
If select <**Mirror**>, the image will be rotated horizontally.
- **180 Degree**
Selecting <**180 Degree**> will make the image 180° counter-/clockwise inversed.


Click "**Save**" to confirm the setting.

GOV Settings

Users can set the GOV length to determine the frame structure (I-frames and P-frames) in a video stream for saving bandwidth. The setting range is from 2 to 64. Longer GOV means decreasing the frequency of I-frames. Click "**Save**" to confirm the GOV setting.

6.4.2 Video Compression

Users can specify the values for MJPEG/H.264 compression mode in the video compression page (see the figure below), depending on the application.

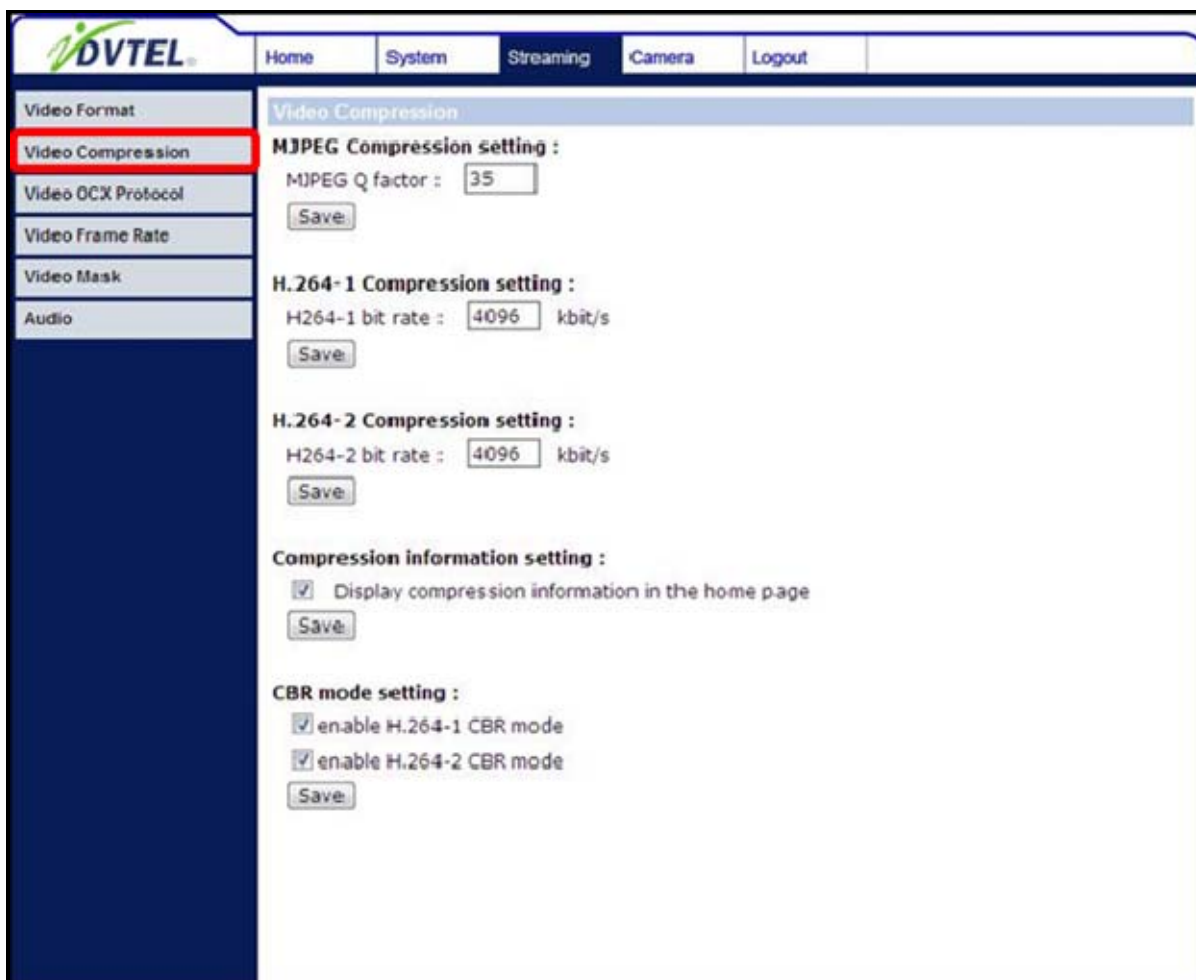

MJPEG Q (Quality) factor

Higher value implies higher bit rates and higher visual quality. The default setting of MJPEG Q factor is 35; the setting range is from 1 to 70.

H.264-1 / H.264-2 bit rate


The default setting of H.264-1/ H.264-2 is 4096 kbps; the setting range is from 64 to 8192 kbps.

Display Compression Information

Users can also decide whether to display compression information on the Home page.

Click "Save" to confirm the setting.

CBR Mode Setting

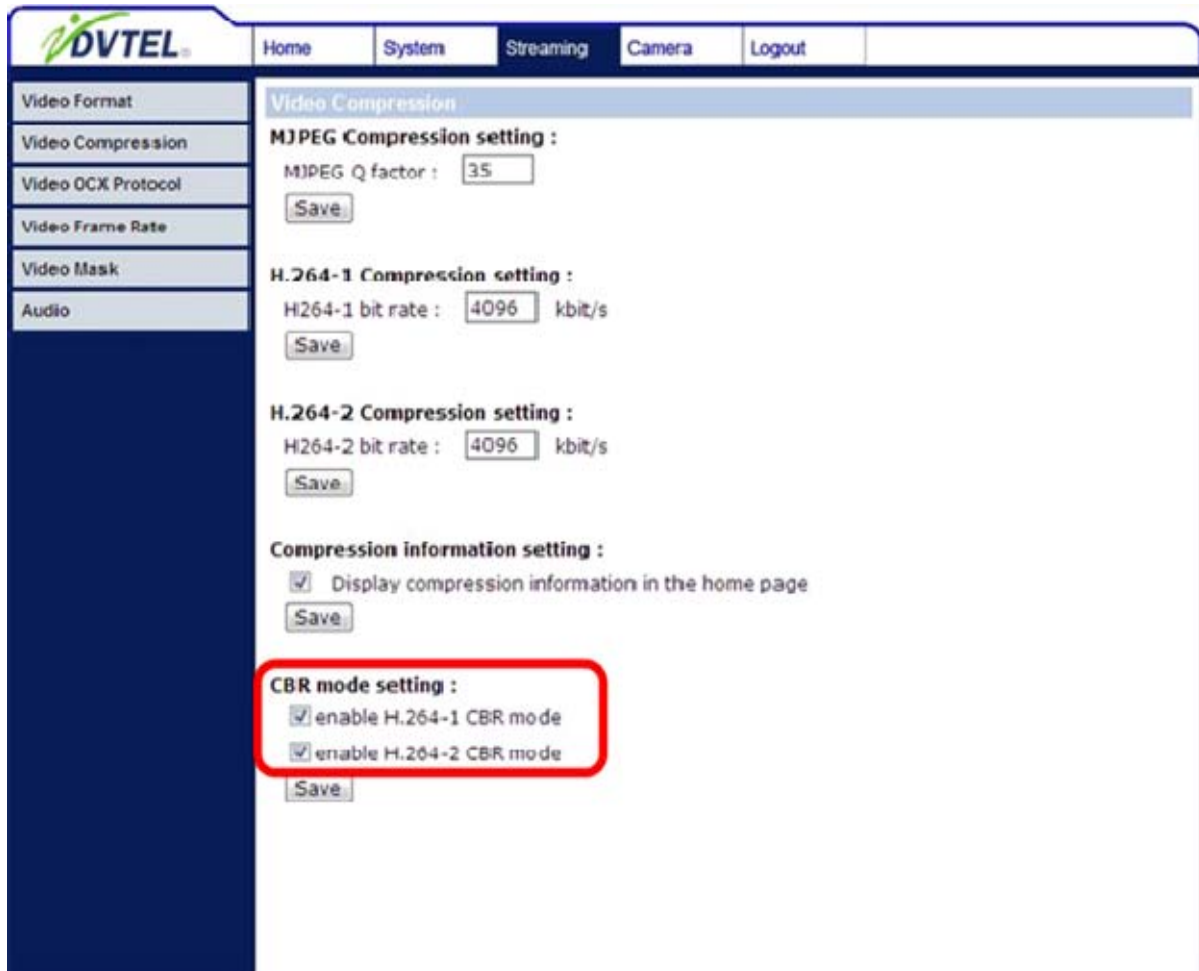


The screenshot shows the iDVTel web interface with the 'Camera' tab selected. The left sidebar contains a menu with options: Video Format, Video Compression, Video OCX Protocol, Video Frame Rate, Video Mask, and Audio. The main content area is titled 'Video Compression' and contains the following settings:

- MJPEG Compression setting :**
 - MJPEG Q factor :
 -
- H.264-1 Compression setting :**
 - H264-1 bit rate : kbit/s
 -
- H.264-2 Compression setting :**
 - H264-2 bit rate : kbit/s
 -
- Compression information setting :**
 - ☒ Display compression information in the home page
 -
- CBR mode setting :** (highlighted with a red box)
 - ☒ enable H.264-1 CBR mode
 - ☒ enable H.264-2 CBR mode
 -

The CBR (Constant Bit Rate) mode could be the preferred bit rate mode if the bandwidth available is limited. It is important to take account of image quality while choosing to use CBR mode.

6.4.3 Video OCX Protocol

In the Video OCX protocol setting page, users can select RTP over UDP, RTP over TCP, RTSP over HTTP or MJPEG over HTTP, for streaming media over the network. In the case of multicast networking, users can select the Multicast mode. The page is shown as follows.

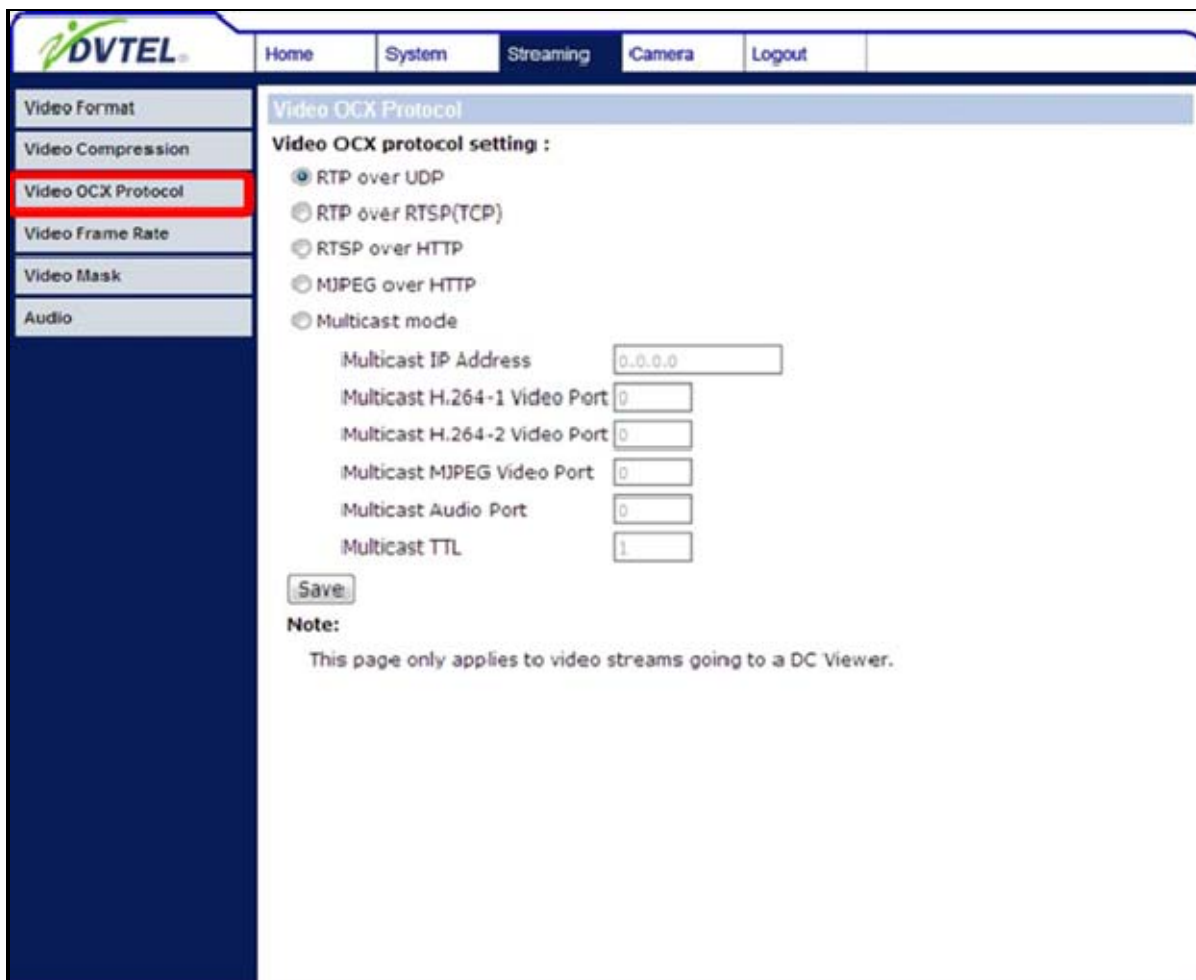


Video OCX protocol setting options include:

- RTP over UDP
- RTP over RTSP(TCP)
- RTSP over HTTP
- MJPEG over HTTP
- **Multicast Mode**
Enter all required data, including multicast IP address, H.264 video port, MJPEG video port, audio port and TTL into each blank.

Click “**Save**” to confirm the setting.

6.4.4 Video Frame Rate

Video frame rate is for setting the frames per second (fps) if necessary. The setting page is shown as below.

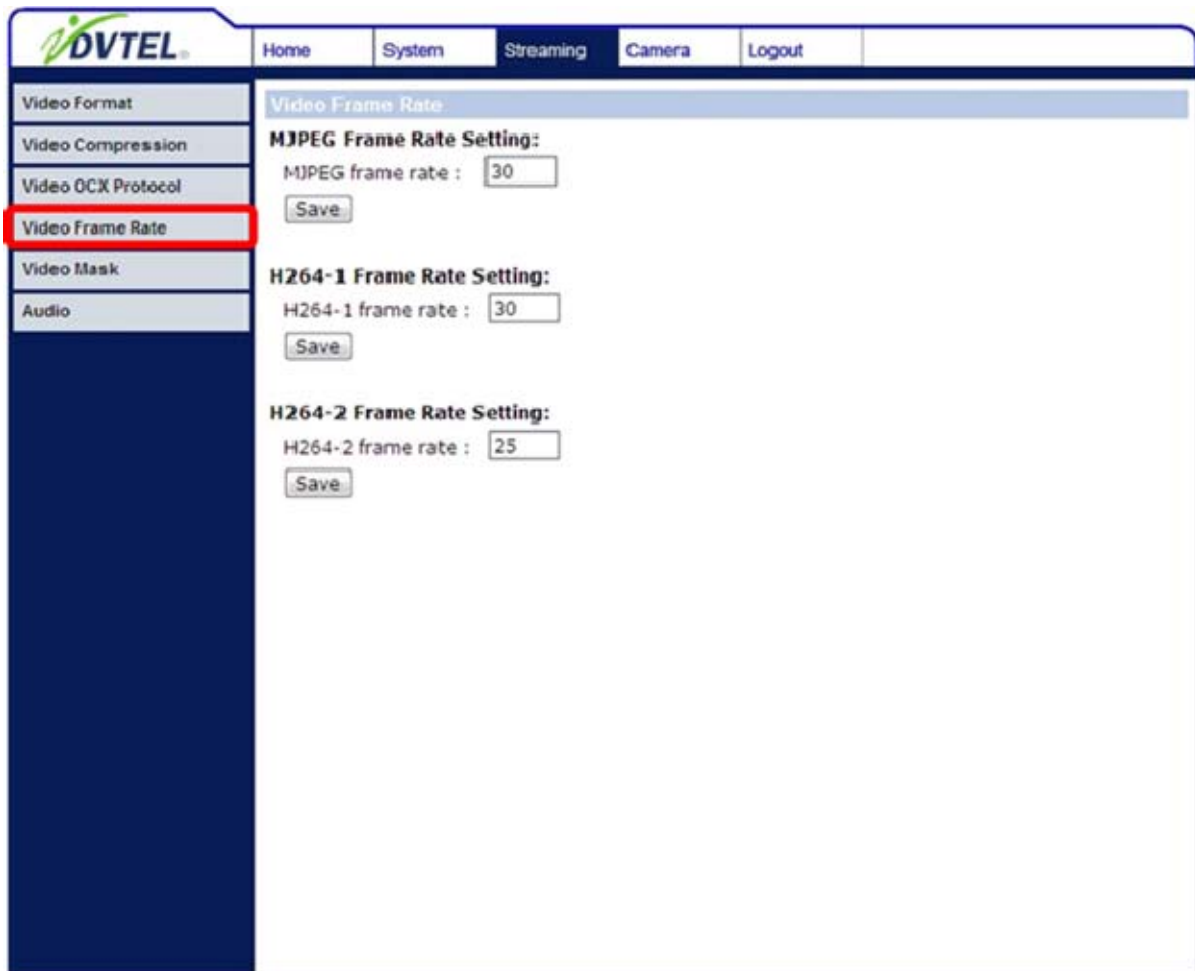

The screenshot shows the DVTEL web interface. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. The left sidebar contains a menu with the following items: Video Format, Video Compression, Video OCX Protocol, Video Frame Rate (highlighted with a red box), Video Mask, and Audio. The main content area is titled 'Video Frame Rate' and contains three sections: 'MJPEG Frame Rate Setting:' with a text input for 'MJPEG frame rate' set to 30 and a 'Save' button; 'H264-1 Frame Rate Setting:' with a text input for 'H264-1 frame rate' set to 30 and a 'Save' button; and 'H264-2 Frame Rate Setting:' with a text input for 'H264-2 frame rate' set to 25 and a 'Save' button.


MJPEG / H.264-1 / H.264-2 Frame Rate

The default setting of MJPEG Frame Rate is 30 fps; the setting range is from 1 to 30.

Click **"Save"** to confirm the setting.



NOTE: Lower frame rate will decrease video smoothness.

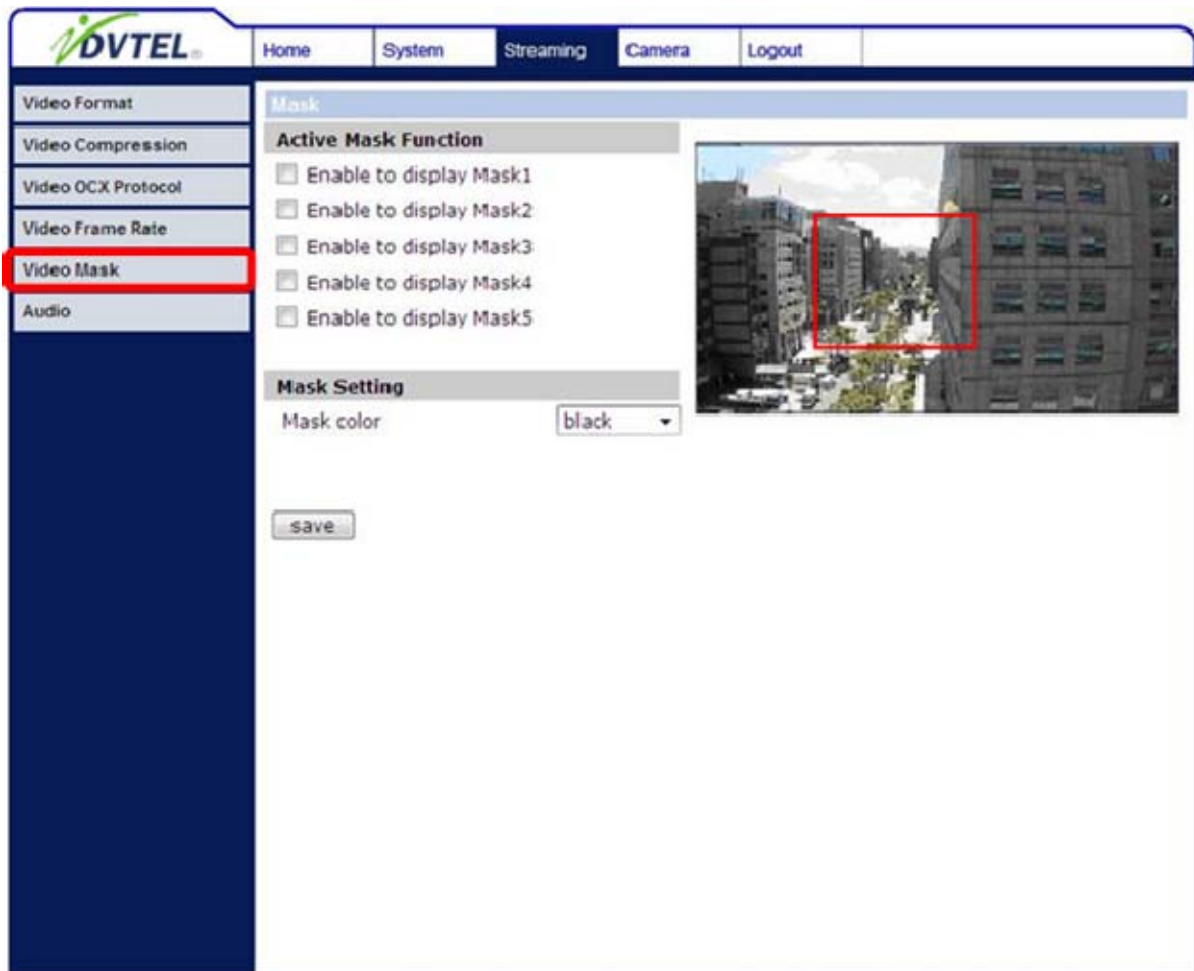

Active Mask Function

- Add a Mask**
 Check a Video Mask checkbox, and a red frame will come out in the Live Video pane at the right side. Use the mouse to drag and drop to adjust the mask's size and place it on the target zone.



NOTE: It is suggested to set the Video Mask twice as large as the object it covers.

- Cancel a Mask**
 Uncheck the checkbox of the Video Mask meant to be deleted, and the selected mask will disappear from the Live Video pane instantly.

Mask Setting


- **Mask color**

The selections of Mask color include red, black, white, yellow, green, blue, cyan, and magenta.

Click "**Save**" to confirm the setting.

6.4.5 Audio Mode and Bit Rate Settings

The audio setting page is show as below. In the Audio page, the Administrator can select one transmission mode and audio bit rate.

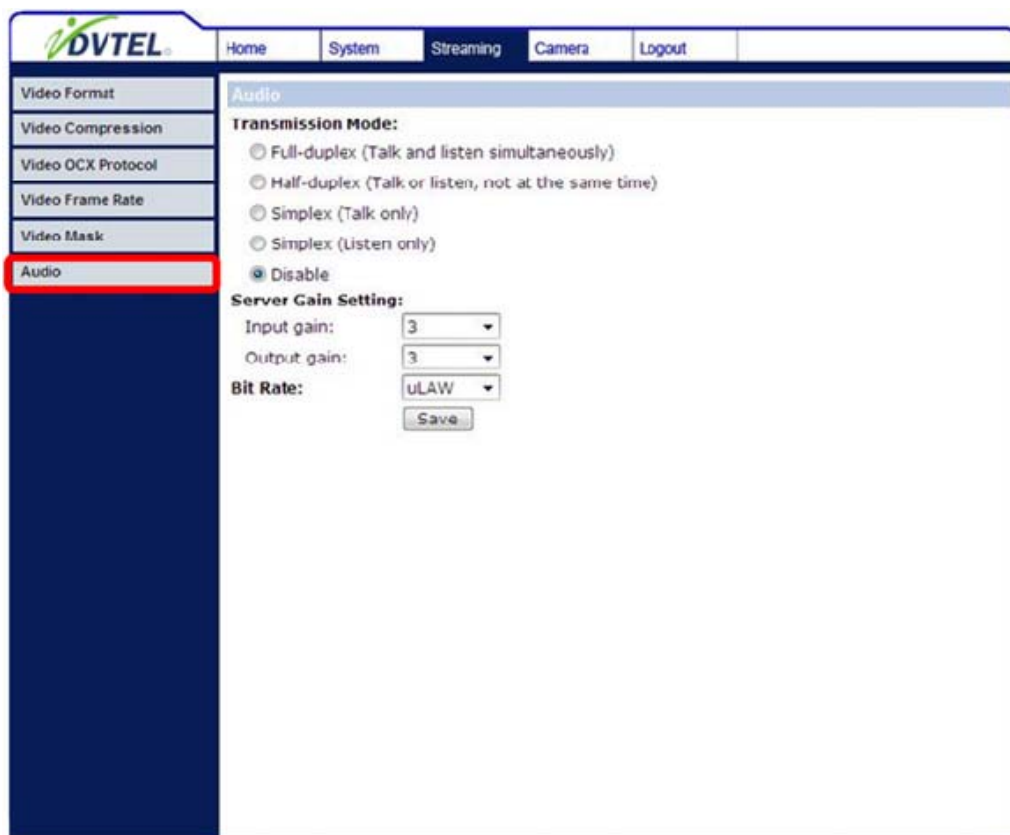

The screenshot shows the DVTel web interface for audio settings. The top navigation bar includes links for Home, System, Streaming, Camera, and Logout. On the left, a sidebar menu lists various settings: Video Format, Video Compression, Video OCX Protocol, Video Frame Rate, Video Mask, and Audio (which is highlighted with a red box). The main content area is titled 'Audio' and contains the following settings:

- Transmission Mode:** A list of radio buttons for selecting the transmission mode:
 - ☐ Full-duplex (Talk and listen simultaneously)
 - ☐ Half-duplex (Talk or listen, not at the same time)
 - ☐ Simplex (Talk only)
 - ☐ Simplex (Listen only)
 - ☒ Disable
- Server Gain Setting:** Two dropdown menus for adjusting gain levels:
 - Input gain: Set to 3
 - Output gain: Set to 3
- Bit Rate:** A dropdown menu set to ULAW.
- Save:** A button to confirm the settings.

Transmission Mode

- **Full-duplex (Talk and Listen simultaneously)**
In the Full-duplex mode, the local and remote sites can communicate with each other simultaneously, i.e. both sites can speak and be heard at the same time.
- **Half-duplex (Talk or Listen, not at the same time)**
In the Half-duplex mode, the local/remote site can only talk or listen to the other site at a time.
- **Simplex (Talk only)**
In the Talk only Simplex mode, the local/remote site can only talk to the other site.
- **Simplex (Listen only)**
In the Listen only Simplex mode, the local/remote site can only listen to the other site.
- **Disable**
Select the item to turn off the audio transmission function.

Server Gain Setting

Set the audio input/output gain levels for sound amplification. The audio gain values are adjustable from 1 to 6. The sound will be turned off if the audio gain is set to **"Mute"**.

Bit Rate

Selectable audio transmission bit rate include 16 kbps (G.726), 24 kbps (G.726), 32 kbps (G.726), 40 kbps (G.726), uLAW (G.711) and ALAW (G.711). Both uLAW and ALAW signify 64 kbps but in different compression formats. Higher bit rate will let higher audio quality and require bigger bandwidth.

Click **"Save"** to confirm the setting.

6.5 Camera Settings

The figure below is the camera configuration page. Details of each parameter setting are described in the following subsections.



Related Links

- [Exposure Setting](#)
- [White Balance Setting](#)
- [Picture Adjustment](#)
- [Digital Zoom](#)
- [IR Function](#)
- [WDR Function](#)
- [Noise Reduction](#)
- [TV System](#)

6.5.1 Exposure Setting

The Exposure pull-down menu is shown as follows:



The exposure is the amount of light received by the image sensor and is determined by the width of lens diaphragm opening, the amount of exposure by the sensor (shutter speed) and other exposure parameters. With this item, users can define how the Auto Exposure function works.


Each exposure mode is specified as follows:

- **Auto Iris**
In this mode, the exposure gives priority to the auto iris. Shutter speed and AGC circuit will function automatically in cooperating with IRIS to get consistent exposure output.
- **Auto Shutter**
In this mode, the camera's Shutter Speed works automatically to get consistent video output level. The shutter speed range is from 1 to 1/30 sec. with 6 options. Users could select suitable shutter speed according to the environmental luminance.
- **Fixed Shutter Mode**
In this mode, fixed shutter speed could be selected from the dropdown menu. The shutter speed ranges are:
 - o **Min shutter speed**-When the camera is set to **PAL** there are 6 options: 1, 1/2, 1/3, 1/6, 1/12, 1/25.
 - o **Min shutter speed**-When the camera is set to **NTSC** there are 6 options: 1, 1/2, 1/4, 1/8, 1/15, 1/30.

Users could select suitable shutter speed according to the environmental luminance.

6.5.2 White Balance Setting

The White Balance pull-down menu is shown as follows:

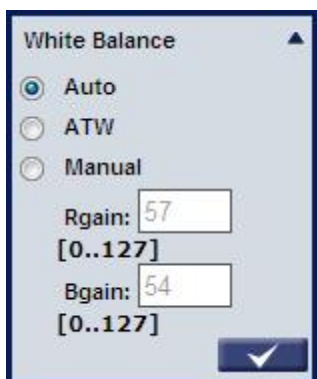

A camera needs to find reference color temperature, which is a way of measuring the quality of a light source, for calculating all the other colors. The unit for measuring this ratio is in degree Kelvin (K). Users can select one of the White Balance Control modes according to the operating environment. The following table shows the color temperature of some light sources for reference.

Light Sources	Color Temperature in K
Cloudy Sky	6,000 to 8,000
Noon Sun and Clear Sky	6,500
Household Lighting	2,500 to 3,000
75-watt Bulb	2,820
Candle Flame	1,200 to 1,500

- Auto Mode**
 The Auto Balance White mode is suitable for environment with light source having color temperature in the range roughly from 2700 ~ 8000K.
- ATW Mode (Auto Tracking White Balance)**
 With Auto Tracking White Balance function, the white balance in a scene will be automatically adjusted while temperature color is changing. The ATW Mode is suitable for environment with light source having color temperature in the range roughly from 2450 ~ 10500K.
- Manual Mode**
 In this mode, users can change the White Balance value manually. Users can select a number between 0 ~127 of "Rgain/ Bgain" item to gain the red/ blue illuminant on the Live Video Pane. Press < ✓ > to confirm the new setting.

6.5.3 Picture Adjustment



- **Brightness**
Users can adjust the image's brightness by adjusting the item. Please select ranging from -12 to +13. To increase video brightness, select a bigger number. Press < ✓ > to confirm the new setting.
- **Sharpness**
Increasing the sharpness level can make the image looked sharper; especially enhance the object's edge. Please select ranging from +0 to +15. Press < ✓ > to confirm the new setting.
- **Contrast**
Camera image contrast level is adjustable; please select ranging from -6 to +19. Press < ✓ > to confirm the new setting.
- **Saturation**
Camera image saturation level is adjustable; please select ranging from -6 to +19. Press < ✓ > to confirm the new setting.
- **Hue**
Camera image hue level is adjustable; please select ranging from -12 to +13. Press < ✓ > to confirm the new setting.

6.5.4 Digital Zoom




The camera's digital zoom is adjustable from x2 to x8. Press < ✓ > to confirm the new setting. Press < ✓ > to confirm the new setting.

6.5.5 IR Function




With the IR cut filter and supporting lens, the CF-4221-00 fixed IP camera can still catch clear image at night time or in low light conditions. Press <√> to confirm the new setting. Press < √ > to confirm the new setting.

6.5.6 WDR Function



The Wide Dynamic Range (WDR) function is for solving high contrast or changing light issues so that enhances better video display. The WDR is adjustable from Low, Mid to Hi. Higher level of WDR represents wider dynamic range, so that the IP Camera can catch a greater scale of brightness. Press <√> to confirm the new setting.

6.5.7 Noise Reduction




Different level options for 3D Noise Reduction (3DNR) include Low, Mid and High. Higher level of 3DNR generates relatively enhanced noise reduction.

The proprietary Smart Picture Quality (SPQ) video processing method could drastically minimum motion blur and provides clear images even in low-light environment. The combination of SPQ and 3DNR at different level further yields exceptional video performance in various conditions.

With Noise Reduction (reduces image noise/snow) function, the IP Camera can deliver more clear images in low-light conditions. The Noise Reduction is adjustable from 3DNR Low, 3DNR Mid, 3DNR Hi, SPQ, SPQ + 3DNR Low, SPQ + 3DNR Mid, to SPQ + 3DNR Hi. Press < √ > to confirm the new setting.


6.5.8 TV System



Select the video format that matches the present TV system. Press < √ > to confirm the new setting.

6.6 Logout

Press the tab “Logout” in the top of the page, and the login window will pop up. This enables login with another user name.

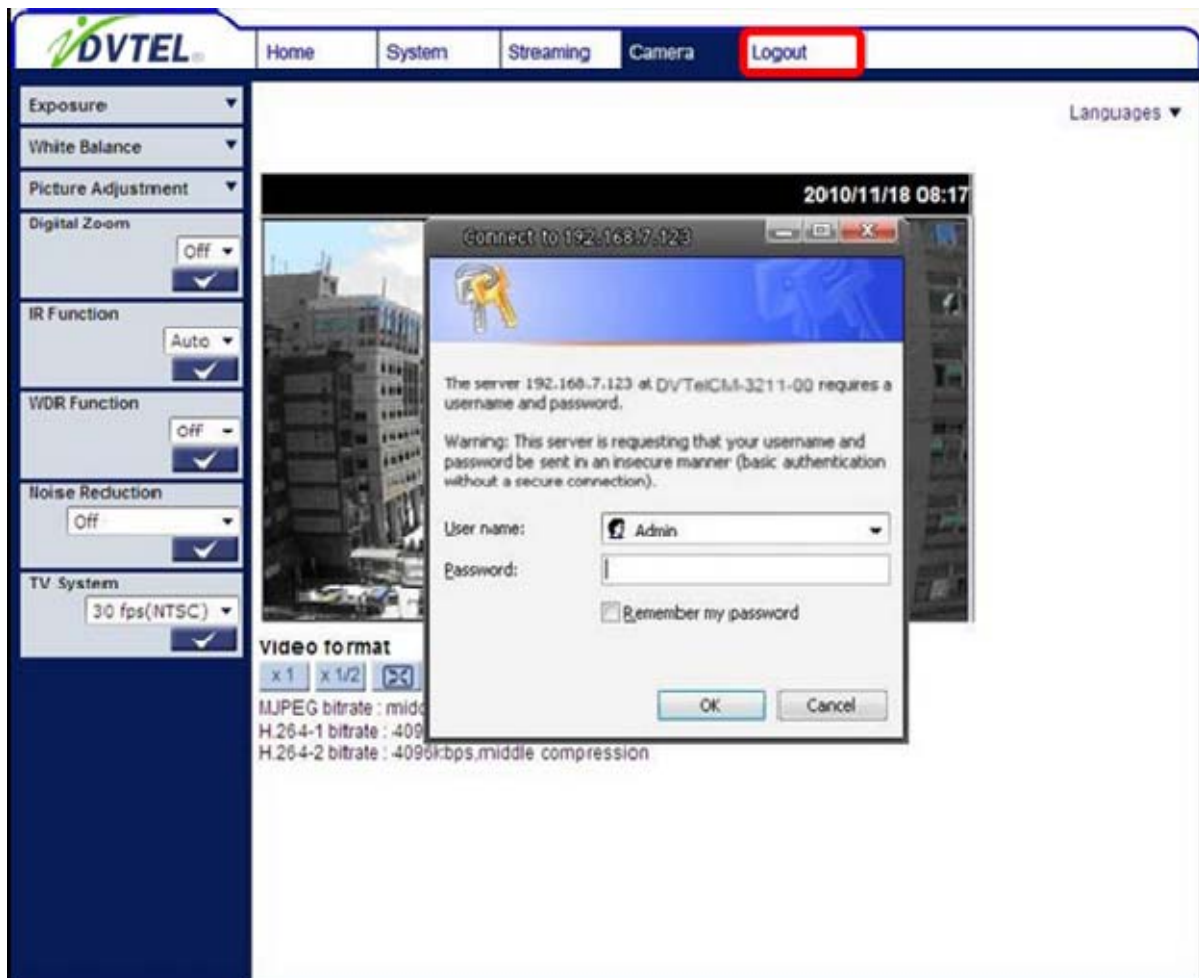

7 Appendix

The following sections are included:

- [Appendix A: Technical Specifications](#)
- [Appendix B: Internet Security Settings](#)
- [Appendix C: Install UPnP Components](#)
- [Appendix D: Deleting the Existing DC Viewer](#)
- [Appendix E: Deleting Temporary Internet Files](#)
- [Appendix F: Contacting DVTel](#)
- [Appendix G: Accessories](#)

7.1 Appendix A: Technical Specifications

Camera		
Image Sensor		1/3" Progressive CMOS
Effective Pixels		1920 (H) x 1080 (W)
Shutter Speed		• PAL from 1/10000 to 1/1.5 with 18 options • NTSC from 1/10000 to 1 with 19 options
Sensitivity		0.1 Lux @ F1.2 Color or SW D/N
Operation		
Video Streaming		Single 1080p (25/30fps)
		Simultaneous 1280x1024(25/30 fps) + 1280x1024(12.5/15fps)
		Simultaneous 1280x720p (25/30 fps) + 1280x720p (12.5/15fps)
Resolution	H.264	HD 1080p /SXGA(1280x1024)/720p/D1/CIF/VGA/XGA-D1/SVGA
	MJPEG	HD 1080p/SXGA/XGA/SVGA
Frame Rate		25/30 fps (H.264 SXGA 13/15 fps)

Operation		
Image Setting	Brightness	Manual
	Exposure	Auto Iris Auto/Fixed Shutter
	Sharpness	Manual
	Contrast	Manual
	White Balance	Manual / AWB/ ATW
	Saturation	Manual
	Hue	Manual
	Digital Zoom	Support
	Privacy Mask (Video Mask)	Web interface: On/Off -Configurable up to 5 imbedded in the streaming video output. Note: In the Latitude interface the Privacy Mask is independent of the CM-3211-00 OSD and is not imbedded as well as allows password protected toggling of the Privacy Mask during live play and playback.
	Day/Night	Camera contains IR cut Day/Night to be used with IR Corrected lenses. If using a non IR corrected lens, the camera supports Electronic Day/Night Function
Audio	Two-way Audio	Line out, Line in/ mic in
	Compression	G.711/G.726
Alarm	Input	5V 10kO pull up
	Output	Photo Relay Output 300V DC/AC
Event Notification		HTTP, FTP, SMTP
Multiple Languages		English, Deutsch(German), French, Italian, Simplified Chinese, Russian, and Korean
Analytics		
	Motion detection	On/Off – Sampling Pixel Interval, Detection level, Sensitivity level, and Time interval settings.
	Regions of Interest	Web Interface: Configurable up to 10 ROI masks. Latitude Interface: Configurable up to 6 ROI masks.
	Motion Metadata	Streaming and Recorded Video includes pre frame level Motion Metadata. Motion Metadata is archive searchable by ROI via the Latitude ControlCenter user interface.
	Triggered Actions	Notifications, On-Event Recording and Relay Output Command Includes configurable alarms and broad range of recording on detection of video and snapshots.
	Tampering Alarm	On/Off – Duration and on event notification, recording to SD card, etc. Supported as an event in Latitude.

Network		
Interface		10/100Mbps Ethernet (RJ-45)
Protocol		IPv4/ v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP,FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, and ONVIF
Password Levels		User and Administrator
Security		HTTPS, IP Filter
Internet Browser		Internet Explorer (6.0+), Chrome, Firefox, Safari
User Account		20
Mechanical		
Lens Mounting		C / CS mount
Connectors	Power	3 pins terminal block
	Ethernet	RJ-45
	Micro SD	SDHC support (not included) Supports up to 32GB MicroSD card.
	Audio	4 pins terminal block • Mono audio input • Stereo audio output
Alarm		4 pins terminal block • Single Alarm Input (2 pins) • Single Relay Output (2 pins)
Analog Video		1.0 Vp-p / 75 ohm, BNC (continuously enabled)
LED Indicator		Power, Link, ACT




General		
Operating Temperature		-10C ~ 50C
Humidity		10% to 90%, no condensation
Power Source		DC12V/ AC24V/ PoE
Power Consumption		4W
Regulatory		CE marked, EN55022-1998 Class A, EN55024, FCC part 15 (subpart B, class A) UL, RoHS Compliant
Dimension		125 x 82 x 52 mm (L x W x H) (w/o lens) For more details, see CF-4221-00 Camera Dimensions
Weight		330 g (0.73 lbs)

7.2 Appendix B: Internet Security Settings

If ActiveX control installation is blocked, please either set Internet security level to default or change ActiveX controls and plug-ins settings.


Internet Security Level: Default

- 1.) Start Internet Explorer (IE).
- 2.) From the Command Bar toolbar, click **Tools** and select **Internet Options** from the menu that appears.

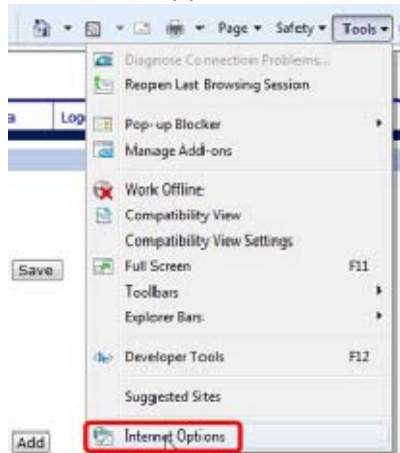

3.) In the Internet Options dialog that appears, click the **Security** tab, and if not selected, click .


4.) If the settings are not defined as default, click **Default Level** and move the *Allowed levels for this zone* slider to **Medium-high** and click **OK**

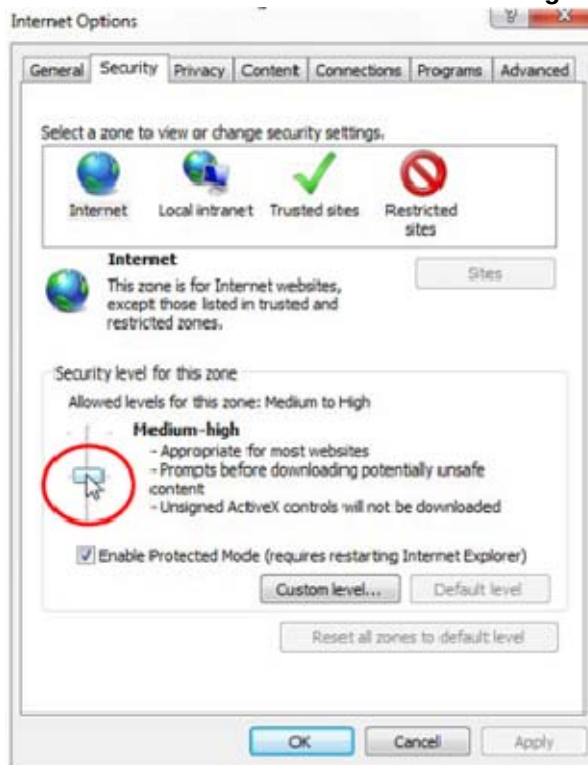

5.) Close all browser windows, and reopen so that the settings to take effect.

ActiveX Controls and Plug-ins Settings - Creating a Custom Level

- 1.) From the Command Bar toolbar, click **Tools** and select **Internet Options** from the menu that appears.

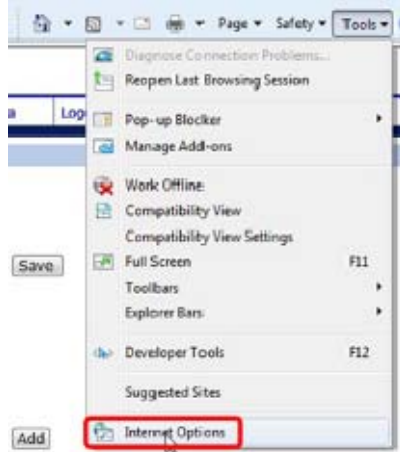

- 2.) In the Internet Options dialog that appears, click the **Security** tab, and if not


selected, click  .

- 3.) Click **Custom Level**.

- 4.) In the dialog that appears, under "ActiveX controls and plug-ins", set ALL the following items to **Enable** or **Prompt**.


ActiveX controls and plug-ins settings:

- a. Automatic prompting for ActiveX controls
- b. Binary and scrip behaviors
- c. Download signed ActiveX controls
- d. Download using ActiveX controls
- e. Initialize and script ActiveX not marked as safe
- f. Run ActiveX controls and plug-ins
- g. Script ActiveX controls marked safe for scripting

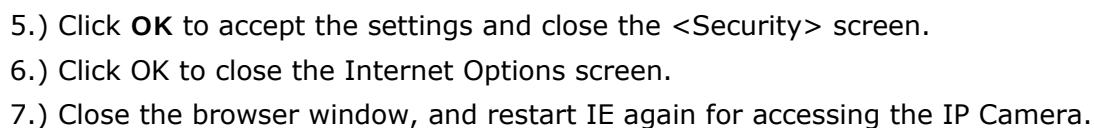


7.3 Appendix C: Install UPnP Components

Please follow the instructions below to enable the UPnP to allow the CF-4221-00 camera to be discovered and display in Network locations under *Other Devices*:

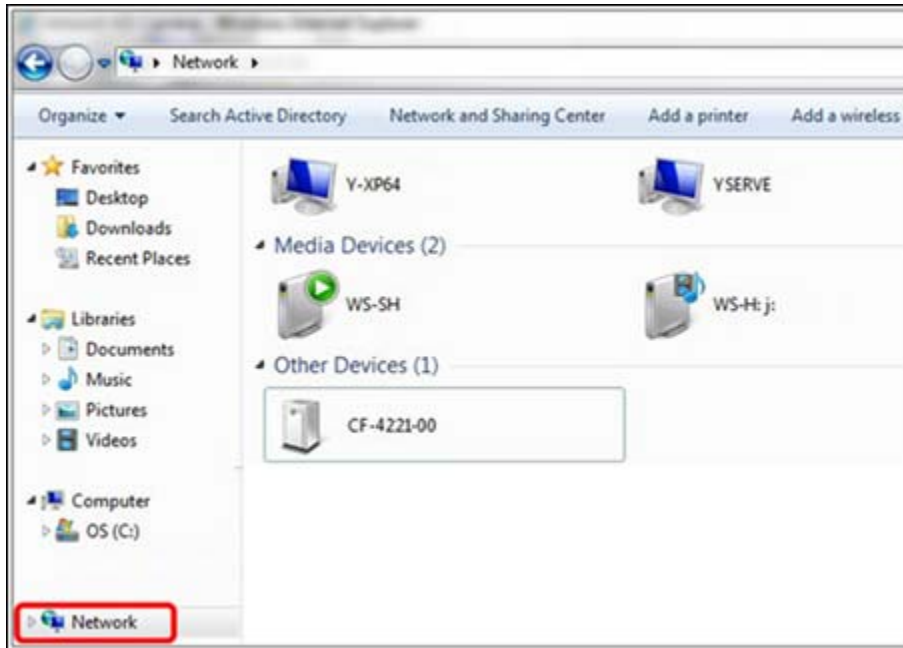


To Enable UPnP Discovery


- 1.) Click  (Start) and select "Control Panel".
- 2.) Click on "Network and Internet".

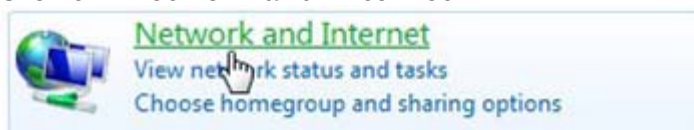

- 3.) Click on "Network and Sharing Center"



- 4.) Click on “**Change Advanced Sharing Settings**”.



- 5.) Expand the Home or Work node, select **Turn on network discovery** and click **Save Changes**.



Note: Network discovery requires that the DNS Client, Function Discovery Resource Publication, SSDP Discovery, and UPnP Device Host services are started, that network discovery is allowed to communicate through Windows Firewall, and that other firewalls are not interfering with network discovery.

To Check the UPnP Device Host services are running:

- 1.) Click  (Start) and type in the **Search programs and files** field "**services**" and then select **Services** from the displayed Programs.
The Services manager dialog appears.



- 2.) In the Services manager, scroll down the list to *UPnP Device Host* and verify it shows the status "Started". If it doesn't display "Started", right mouse click and select **Start** from the shortcut menu.

7.4 Appendix D: Deleting the Existing DC Viewer


For users who have installed the DC Viewer in the PC previously, please first delete the existing DC Viewer from the PC before accessing to the IP Camera.

To delete a legacy DC Viewer

- 1.) Click  (Start) and select "**Control Panel**".
- 2.) In the "Control Panel", click "Uninstall a program."



- 3.) From the installed program list, select **DCViewer** and then on the banner bar, click **Uninstall**.

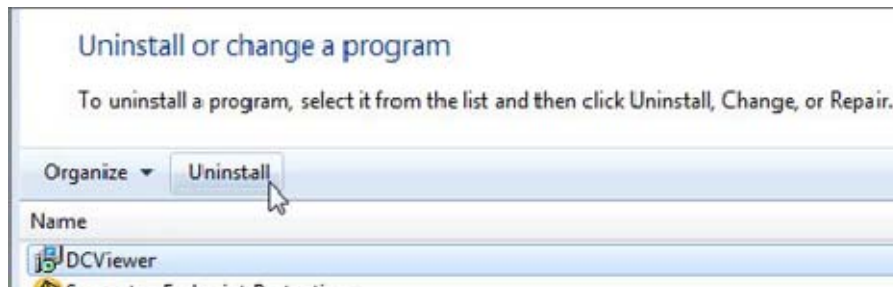


- 4.) If prompted to confirm the uninstall, click **Yes**.

7.5 Appendix E: Deleting Temporary Internet Files

To improve browser performance, it is suggested to clean up the all the files in the Temporary Internet Files. The procedure is as follows:

To delete temporary Internet files

1. In Internet Explorer (IE), from the Command Bar toolbar, click **Tools** and select **Internet Options** from the menu that appears.

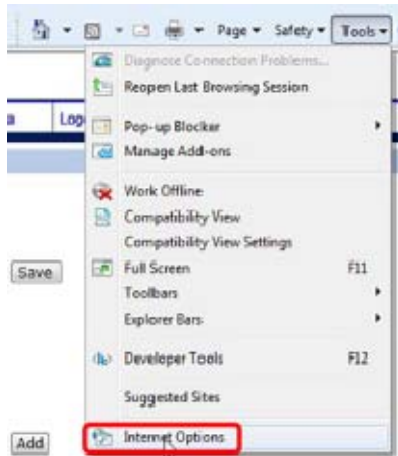

- 2.) In the Internet options dialog, click **Delete**, and in the *Delete Browser History* dialog that appears, select **Temporary Internet files** (Deselect Cookies and History if you want to keep this data.) and then click the **Delete**.



7.6 Appendix F: Back Focus Adjustment

When to adjust back focus

Back Focus refers to the distance from the rear lens element to the camera focal plane. In most cases, it is required to adjust back focus only when the camera's lens cannot hold focus throughout its zoom range,

If the focus cannot be achieved within the zoom range, you may need to adjust the back-focus.

What requirements

Tools required when carrying out back focus adjustment include:

- o Back focus adjuster (in the IP Camera's package)
- o Test chart / contrasting object

If the focus cannot be achieved within the zoom range, you may need to adjust the back-focusing

To adjust back focus

1.) Set the Exposure Settings as follows:


- a.) In the *Web Base Viewer* go to the **Camera ► Exposure** screen and select from the **Exposure Setting** menu **Auto-shutter** mode.
- b.) Save changes



Tip: It is preferably do the adjustment during low light conditions.

2.) Do the following:

- a.) View an object at least 75 feet (23 meters) away. For greater telephoto capable lenses, the object can be located further away. If the field of view is less than 75 feet, the object should be as distant as possible.
- b.) Adjust the zoom to the extreme telephoto position.
- c.) Adjust the focus to the best possible focused image.
- d.) If the image is not focused (sharp), loosen the back focus ring's retaining screw with the supplied hex tool (if not already loose) and rotate the lens mount to adjust the back focus as needed to achieve a sharp in-focus picture.

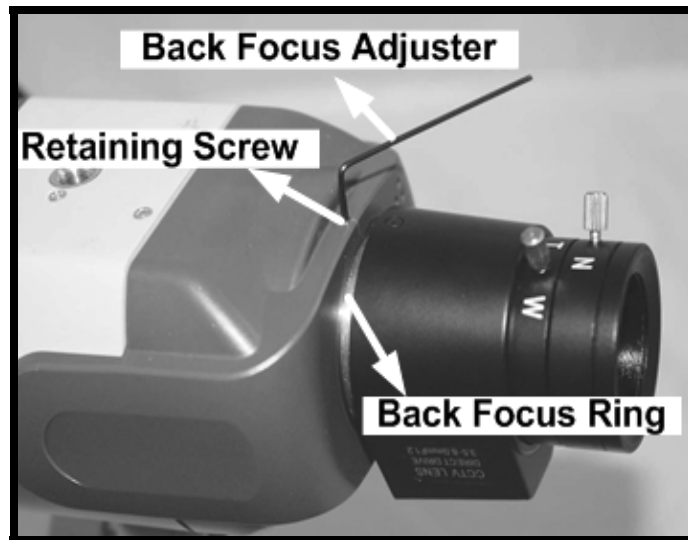

- e.) Zoom out to wide-angle position (for close FOV) and attempt to focus on a close object (eg. 1-3m.). If clear focus can be achieved, go to step 3.).
 - f.) Repeat steps a. - e. until focus is optimal throughout the zoom range.
 - g.) Tighten the back focus ring's retaining screw to secure the ring in place.
- 3.) Return the camera's Exposure Setting to *Auto Iris* if this was temporarily changed to *Auto-shutter* mode during focusing.

7.7 Appendix G: Contacting DVTel

DVTel, Inc., multiple award-winning market leader in the development and delivery of intelligent security solutions over IP networks. We provide unified solutions leverage existing network infrastructure while providing unmatched levels of flexibility, scalability, cost-effectiveness—all backed by superior customer support.

To contact us:


CORPORATE HEADQUARTERS DVTel, Inc. 65 Challenger Road Ridgefield Park, NJ 07660 201.368.9700 Fax: 201.368.2615 Order Fax: 201.712.0343 info@dvteel.com mailto:info@dvteel.com	ASIA PACIFIC REGION DVTel 111 North Bridge Road, #27-01/02 Peninsula Plaza, Singapore 079098 +65 6389 1815 Fax: +65 6491 5660 info@dvteel.com
ANZ AND THE PACIFIC ISLANDS DVTel 37 Victoria Street Henley Beach SA 5022 T +61 8 8235 9211 F +61 8 8235 9255 M +61 419 850 166 info@dvteel.com	EMEA DVTel UK LTD. 7 Lancaster Court Coronation Road High Wycombe, HP12 3TD +44 (0) 1494 430240 Fax: +44 (0) 1494 446928 info@dvteel.com
INDIA AND SAARC DVTel Gesco Corporate Centre The Great Eastern Centre 70, Nehru Place, New Delhi - 110019 +91 11 26209202 Fax: +91 11 26209302 info@dvteel.com	CALA DVTel Mexico S.A.P.I. de C.V Ave. Paseo de la Reforma No. 505 Piso 31 Col. Cuauhtémoc México, Distrito Federal C.P. 06500 T +52 443 279 3746 Fax: +52 55 8503 4299 info@dvteel.com
China DVTel China Room 607, Block 3 Zhubang 2000 Office Tower No.98 Balizhuang Xili Chaoyang District Beijing, China 100025 Tel: 86-10-8586-8836 Mobile: +86-13501266857 info@dvteel.com	DVTel 中国. 北京市朝阳区八里庄西里98号住邦2000商务中心3号楼607室 100025 座机: +86-10-85868836 手机: +86-13501266857 传真: +86-10-85868815 邮件: info@dvteel.com

To request the latest versions of firmware and software or to download other product-related documents, visit <http://www.dvtel.com/support>. If you have obtained a login go to our [support gateway](#).

For assistance, email us at support@dvteel.com or phone 1-888 DVTEL 77.

7.8 Appendix H: Accessories

The following are accessories available from DVTel for installation of your DVTel CF-4221-00 Fixed IP Camera. For more information on available options, contact your DVTel sales representative or visit www.dvtel.com to request details on where to get the accessories you need.

Image	Name	Description
	CF-X200-01	Outdoor Fixed Camera Housing: • Equipped with Heater & Fan • 24VAC @ 20W • Aluminum with Sunshield • -30 to +50C (-22 to +122F) • 140mm x 112mm x 340mm (W x H x L) • 1.51Kg / 3.4 LB
	CF-X200-POLE	Pole Mount Option for CF-X200-01 Housing
	Standard Definition CS-Mount Lenses	
	CF-L101-03	3.0-8.5mm f1.2, Auto-Iris, IR Corrected
	CF-L101-28	2.8-12mm f1.2, Auto-Iris, IR Corrected
	CF-L101-75	7.5-50mm f1.3, Auto-Iris, IR Corrected
	CF-L100-03	3.0-8.5mm f1.2, Manual-Iris, IR Corrected
	CF-L100-85	8.5-40mm f1.2, Manual-Iris, IR Corrected
	High Definition / Mega-Pixel CS-Mount	
	CF-L121-28	High Def: 2.8-12mm f1.3, MP Auto-Iris, IR Corrected
	CF-L131-31	High Def: 3.1-8mm f1.3, MP Auto-Iris, IR Corrected